


LINEAR POTENTIOMETER

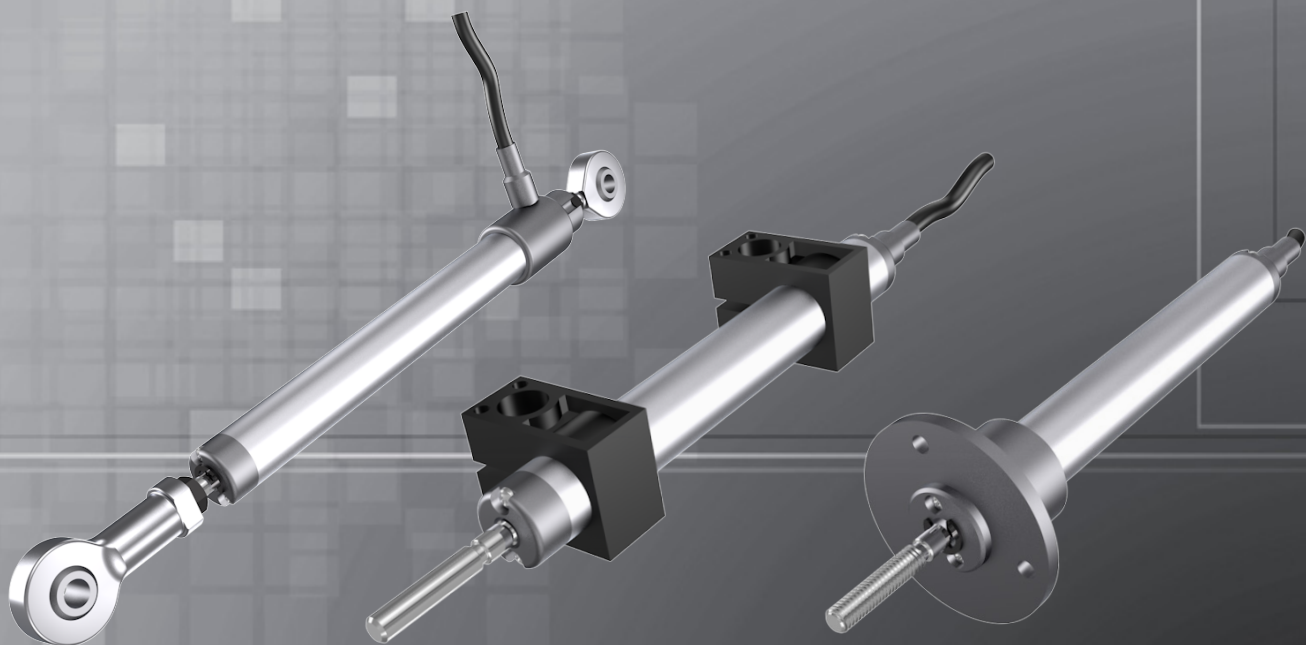

Content:

Technical Data	2
Technical Drawing	3
Electrical Connection	3
Order Code	4
Accessories	4

Series LZW1

Key-Features:


- Housing diameter 12.9 mm
- Flexible mounting with brackets, rod end bearings or flange
- Available measurement ranges from 25 to 250 mm
- Linearity up to $\pm 0.05\%$
- Displacement speed ≤ 10 m/s
- Protection class IP60
- Working temperature $-30...+100\text{ }^{\circ}\text{C}$
- Life cycle $>25 \times 10^6$ m or $>100 \times 10^6$ operations, whichever is less
- Simple apparatus according to the EN 60079-11

TECHNICAL DATA


Measurement range	[mm]	25	50	75	100	125	150	200	250
Linearity	[%]	±0.2	±0.1			±0.05			
Resolution		theoretical infinite, depends on the signal quality of the reference respectively supply voltage							
Displacement force	[N]	≤0.5							
Displacement speed	[m/s]	≤10							
Resistance	[kΩ]	1	2	3	4	5	6	8	6
Tolerance on resistance	[%]	±20							
Dissipation at 40 °C (0 W at 120 °C)	[W]	0.5	1	1.5	2	2.5	3		
Applicable voltage max.	[V]	20	40	60					
Recommended cursor current	[μA]	<0.1							
Cursor current max.	[mA]	10							
Electrical isolation		>100 MΩ at 500 VDC, 2 s, 1 bar							
Dielectric strength		<100 μA at 500 VAC, 50 Hz, 2 s, 1 bar							
Protection class		IP60							
Operating temperature	[°C]	-30...+100							
Storage temperature	[°C]	-50...+120							
Temperature coefficient output voltage	[ppm/°C]	<1.5							
Vibration resistance		5...2000 Hz, A _{max} = 0.75 mm, a _{max} = 20 g							
Shock resistance		50 g, 11 ms							
Life cycle		>25 x 10 ⁶ m or >100 x 10 ⁶ operations (whichever is less)							
Connection		cable output (1 m), 3 poles							
Rod		stainless steel, AISI 303							
Housing		anodised aluminium, Nylon 66 G 25							
Mounting		brackets (LZW1-S), rod end bearings (LZW1-A) or flange (LZW1-F)							

TECHNICAL DRAWING

LZW1-S

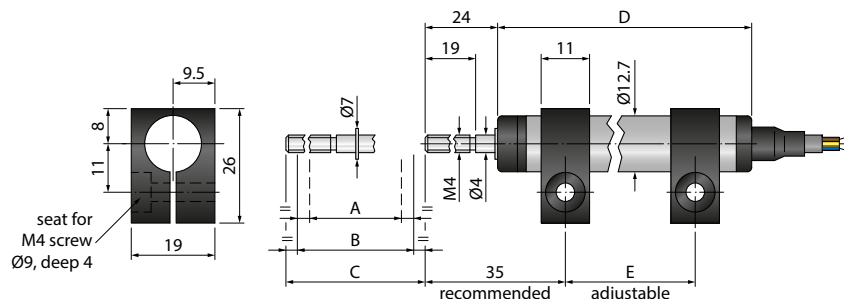


LZW1-F

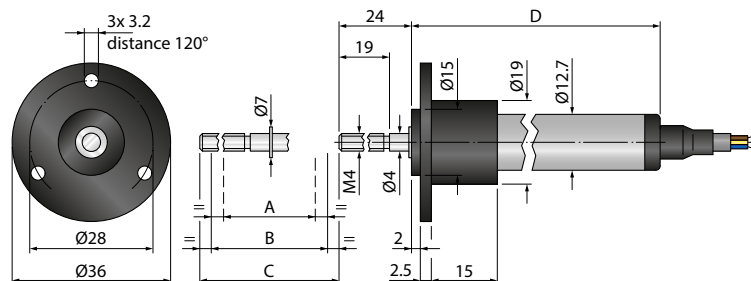

Measurement range / useful electrical stroke +1/-0	A	25	50	75	100	125	150	200	250
Theoretical electrical stroke ±1	B	26	51	76	101	126	151	201	251
Mechanical stroke	C	30	55	80	105	130	155	205	255
Housing length LZW1-S, LZW1-F	D	74.5	99.5	124.5	149.5	174.5	199.5	249.5	299.5
Recommended distance between brackets LZW1-S	E	42	67	92	117	142	167	217	267


TECHNICAL DRAWING

LZW1-A

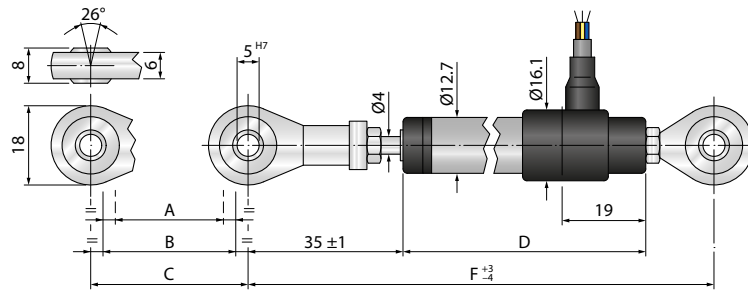

Measurement range / useful electrical stroke +1/-0	A	25	50	75	100	125	150	200	250
Theoretical electrical stroke ±1	B	26	51	76	101	126	151	201	251
Mechanical stroke	C	30	55	80	105	130	155	205	255
Housing length LZW1-A	D	102	127	152	177	202	227	277	327
Minimum distance between rod end bearings	F	153	178	203	228	253	278	328	378

ELECTRICAL CONNECTION

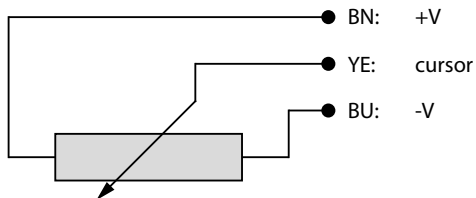

Installation notes:

- Do **NOT** use the sensor as a variable resistor!
- While calibrating the sensor set the stroke so that the output signal does not drop below 1 % or exceed 99 % of the supply voltage.

ACCESSORIES

Signal conditioner PMX-24

- Converts potentiometer signals into analog output signals: 4...20 mA, 0...10 V, 0...5 V, ±10 V, ±5 V
- Input: potentiometer 1...20 kΩ
- Configurable output
- DIN-rail-mounting with face-side connector
- For more information please refer to the [PMX-24 data sheet](#).



ORDER CODE

LZW1 - [] - [] - []

Version

Installation with brackets
 Installation with rod end bearings
 Installation with flange

S
A
F-
10M

Cable length

Standard 1 m
 Optional 10 m

Measurement range [mm]

25 / 50 / 75 / 100 / 125 / 150 / 200 / 250

ACCESSORIES

Mounting accessories

STA074 ¹⁾ bracket for LZW1-S
 SND001 ²⁾ rod end bearing with M4 external thread, housing side
 SND002 ²⁾ rod end bearing with M4 internal thread, rod side

Digital displays for sensors with analog output, 2 channel

WAY-AX-S touch screen, supply: 18...30 VDC
 WAY-AX-S-AC touch screen, supply: 115...230 VAC

For more information and options please refer to the [WAY-AX data sheet](#).

¹⁾ LZW1-S: 2 pcs. included in delivery

²⁾ LZW1-A: 1 pc. each included in delivery

Signal conditioner

PMX-24 Output signals: 4...20 mA, 0...10 V, 0...5 V, ± 10 V, ± 5 V

For more information and options please refer to the [PMX-24 data sheet](#).

Teléfonos / Phone number

Mex: +52 (33)-3854-5975

+52 (33)-3823-4349

USA: +1 (619) 619-7350

Página Web / Website

tienda.logicbus.com.mx

logicbus.com

Correo electrónico / E-mail

ventas@logicbus.com

sales@logicbus.com



Dirección / Address



Av. Fray Antonio Alcalde 1822

Miraflores, 44270

Guadalajara, Jal



8280 Clairemont Mesa Blvd

Suite 122

San Diego, CA 92111

