



catalogue



innovative infrared temperature sensors low-noise
industrial power supplies



choosing a sensor


INTRODUCTION

The sensor detects the infrared radiation emitted by an area of the target surface, and converts this into a useful temperature measurement. There are 3 main factors affecting the accuracy of the measurement:

TYPE OF MATERIAL




Most non-reflective materials, such as paper, cardboard, asphalt, food, plastics, rubber and painted surfaces are easy to measure with a general-purpose, long-wavelength sensor.

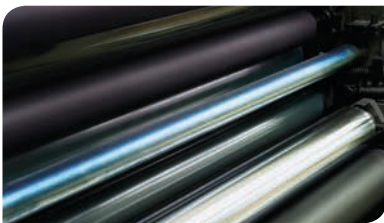

Some materials, such as reflective metals, may require a specialised short-wavelength sensor for accurate results.

TARGET SIZE AND DISTANCE

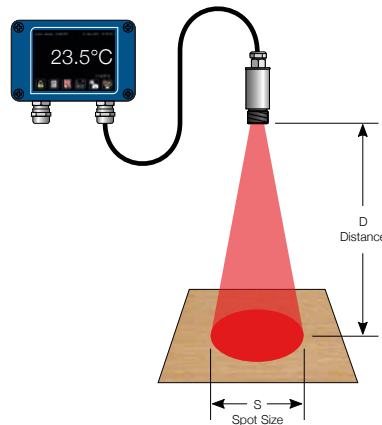

The sensor measures the average temperature within an area on the target surface. The size of this area depends on the sensor's optics.

A choice of optics is available for most sensors. The size of the target and the measurement distance determine which optics should be chosen.

For each choice of optics, the spot size at any given distance can be determined using the D:S (Distance to Spot Size) ratio.

AMBIENT CONDITIONS




In normal room-temperature conditions, a simple, uncooled sensor may be used. For hotter environments, high-ambient-temperature models, or models with air or water cooling, are available.




Obstructions such as dust, steam and smoke can affect the reading, and specialised sensors are available for accurate readings in very damp or dirty conditions. However if the air looks clear, then it should be easy to get good results with a general-purpose sensor.

Smartphone Configurable Infrared Temperature Sensor

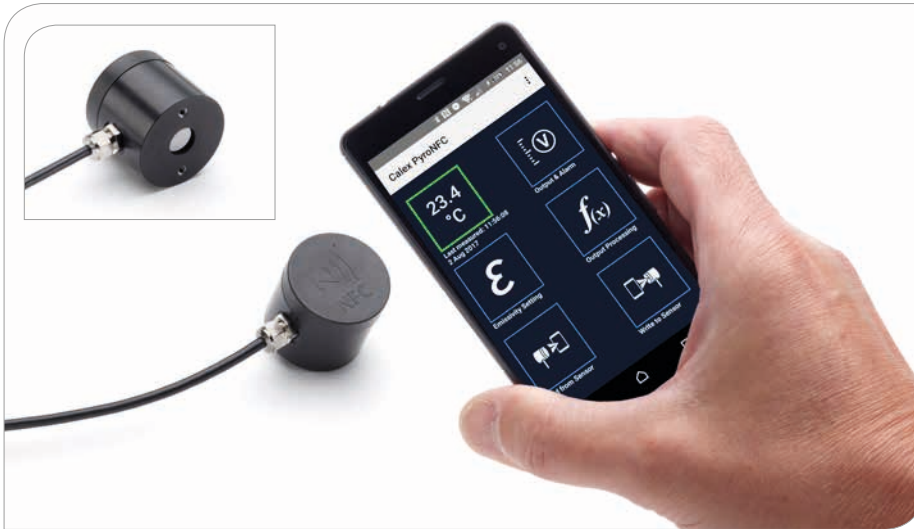

- Non-contact industrial temperature sensor
- Fully configurable via smartphone app
- Choice of voltage or thermocouple outputs
- Simultaneous open collector alarm output
- Measures from 0°C to 1000°C, accurately and consistently
- Extremely small, with side-entry cable: ideal for mounting in tight spaces
- Fast response time: 125 ms
- Low cost, high performance
- Operates in ambient temperatures up to 80°C without cooling
- Form factor optimised for brake testing applications, plus many others

APP FEATURES

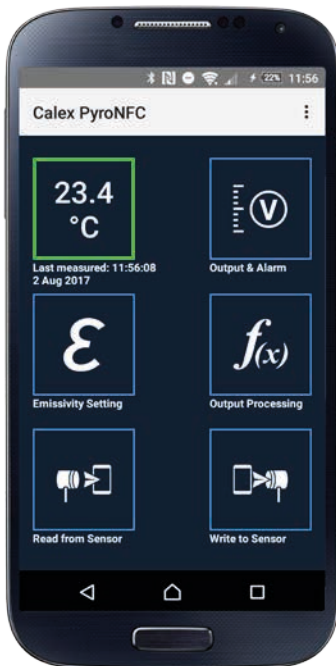

- Continuously read temperature from PyroNFC sensors
- Instantly configure PyroNFC sensors without powering them
- Simply touch the sensor with the device to communicate
- Compatible with NFC-equipped Android devices
- Get the app free from Google Play Store (search for "PyroNFC")

GENERAL SPECIFICATIONS

Temperature Range
0 to 1000°C

Outputs
2 outputs, configurable via NFC:
0-5, 1-5 or 0-10 V DC output, linear with measured temperature, rescalable, and:
Open collector alarm output with temperature threshold and hysteresis

Field of View
15:1 (see OPTICS)

Accuracy
± 1.5% of reading or ± 1.5°C, whichever is greater

Repeatability
± 0.5% of reading or ± 0.5°C, whichever is greater

Response Time, t90
125 ms

Configuration
Via Android app using NFC-equipped device (e.g. smartphone or tablet)

Emissivity
Adjustable via app

Emissivity Setting Range
0.2 to 1.0

Max Temperature Span (Linear Output)
1000°C

Min Temperature Span (Linear Output)
100°C

Spectral Range
8-14 μm

Max. Supply Voltage
28 V DC

Min. Supply Voltage (at Sensor)
12 V DC (for 10 V output)
6 V DC (for 5 V or thermocouple output)

Max Current Draw
7 mA

ENVIRONMENTAL

Environmental Rating
IP65

Ambient Temperature Range
0°C to 80°C

Relative Humidity
95% max. non-condensing

CONFORMITY

Electromagnetic Compatibility (EMC)
EN61326-1, EN61326-2-3 (Electrical Equipment for Measurement, Control and Laboratory Use - EMC Requirements - Industrial)

RoHS Compliant
Yes

APP

Configurable Parameters
Temperature range (linear output)
Linear voltage output type and scale
Alarm output threshold and hysteresis
Emissivity setting
Reflected temperature


Temperature Units
°C / °F

Signal Processing
Averaging Period (0.125 to 60 seconds)
Peak / Valley Hold
Hold Period (0.125 to 1200 seconds)

Real Time Temperature Reading
Hold NFC device against sensor for continuous in-app temperature updates

DIMENSIONS AND CONNECTIONS

MODELS WITH TYPE K THERMOCOUPLE OUTPUT

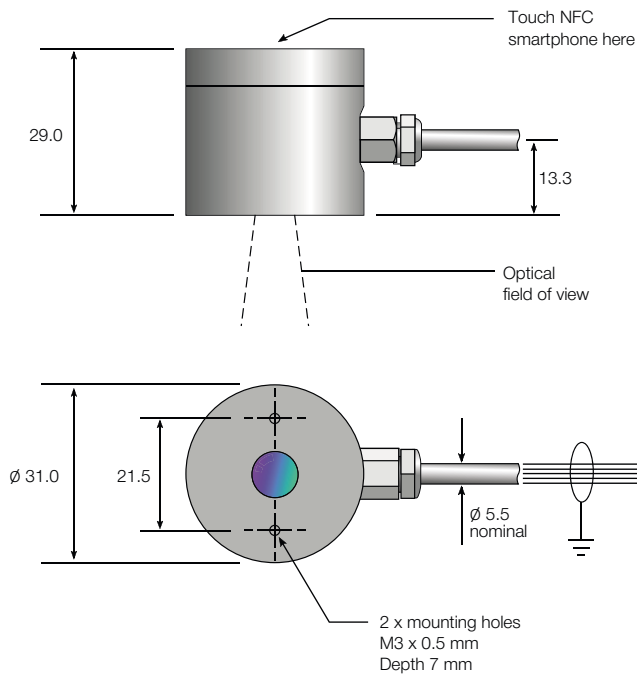

MECHANICAL SPECIFICATIONS

Construction


Black anodised aluminium and ABS

Cable Length


1 metre standard (longer lengths available to order)

Weight with 1 Metre Cable

65 g

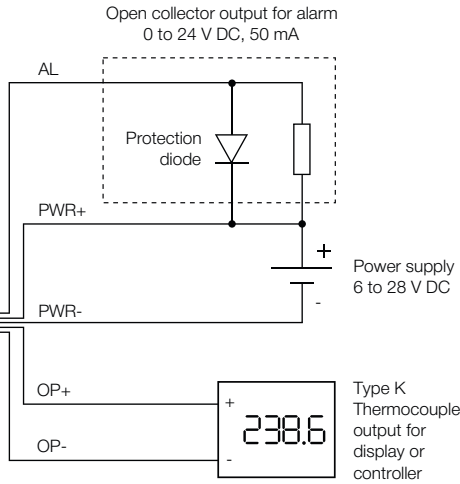


MODELS WITH VOLTAGE OUTPUT

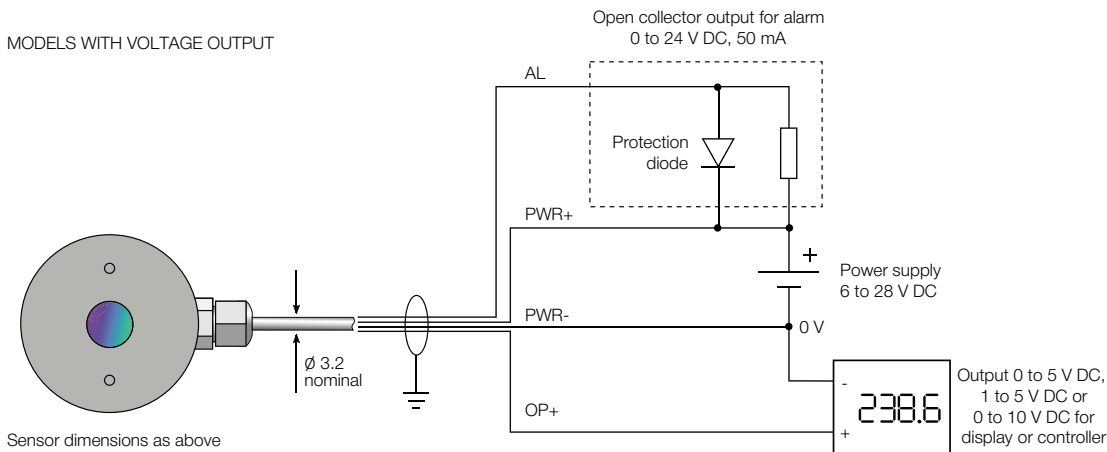

OPTICS

Diameter of target spot measured versus distance from sensing head (90% energy)

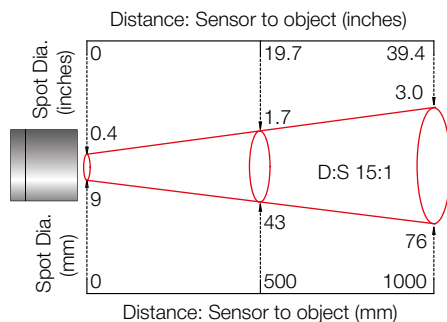

MODEL NUMBERS



PN 151 K

Outputs
(blank) = configurable 0-5 / 1-5 / 0-10 V DC output for measured temperature and open collector alarm output
K = Type K Thermocouple output for measured temperature, and open collector alarm output

Optics
151 = 15:1 divergent optics

Series
PN = PyroNFC infrared temperature sensor with NFC wireless communications and 1 metre cable

ACCESSORIES

Fixed mounting bracket **FBN**

Adjustable mounting bracket **ABN**

Air purge collar **APN**

3-point UKAS traceable calibration certificate **CALCERTA**

Extended cable (30 m max) **PNCE (voltage output) / PNCEK (thermocouple output)**

PyroCouple, PyroEpsilon, PyroBus, PyroCAN General Purpose Infrared Temperature Sensors



- Temperature range: -20°C to 500°C
- Choice of precision optics for large or small targets at short or long distances
- Fast response with high stability
- Stainless steel housing, sealed to IP65
- Quick and easy installation
- Wide range of accessories

The Caalex Compact Series is a range of high quality, low cost non-contact sensors that measure the temperature of inaccessible or moving objects and materials. They measure temperatures from -20°C to 500°C, accurately and consistently, with an outstanding response time of 240 ms. All models conform to industrial EMC standards.



The **PyroCouple** is a simple infrared temperature sensor with a choice of analogue outputs. No complicated setup is required - just connect a temperature indicator and power supply, and instantly start taking measurements.

- Temperature ranges from -20°C to 500°C
- Suitable for non-contact temperature measurement on most non-reflective non-metal surfaces, such as paper, thick plastics, asphalt, painted surfaces, food, rubber and organic materials, among many others.
- Choice of analogue outputs for measured temperature:
 - Two-wire 4-20 mA,
 - Four-wire 0-50 mV,
 - Four-wire Type K, J or T thermocouple

The **PyroEpsilon** is a simple sensor with an adjustable emissivity setting. It is ideal if the target is partially reflective.

- Temperature ranges from -20°C to 500°C
- Two-wire 4-20 mA output
- Emissivity adjustment via a separate two-wire 4-20 mA input
- Adjust the emissivity continuously during the process using a variable 4-20 mA source
- Set the emissivity manually with the PyroTune emissivity adjuster
- If you are not sure the emissivity of the target is high, choose the PyroEpsilon instead of the PyroCouple.

The **PyroBus** is a networkable, fully configurable sensor with RS485 Modbus RTU communications.

- Temperature ranges from -20°C to 500°C
- Up to 247 sensors may be connected to a single network.
- Adjustable emissivity setting for use on a wide range of materials
- Averaging function to smooth the temperature output
- Peak and valley hold processing for measuring individual objects on a conveyor
- Reflected energy compensation for accurately measuring the temperature of objects in ovens or chillers, from outside
- Optional 6-channel touch screen terminal for local display, configuration and data logging
- Connect sensors and 6-channel terminals directly to an existing RS485 Modbus system

The **PyroCAN** is a sensor with CAN communications.

- Temperature range: -20°C to 1000°C
- Raw CAN communications
- Adjustable emissivity setting for measuring a variety of materials
- Ideal for onboard vehicle temperature monitoring, and many other applications
- Conforms with EMC standard EN 13309:2010

GENERAL SPECIFICATIONS - SENSORS

Output (PyroCouple)

| PyroCouple Output Option (see Model Numbers) | Target Temperature Output | Sensor Temperature Output |
|---|---|---------------------------|
| -0 | 4-20 mA | Not available |
| -1 | 0-50 mV | 4-20 mA |
| -2 | Type T thermocouple | 4-20 mA |
| -3 | Type J thermocouple | 4-20 mA |
| -4 | Type K thermocouple | 4-20 mA |
| -5 | 0-50 mV (very low current draw: 3.2 mA) | Not available |

| | PyroCouple | PyroEpsilon | PyroBus | PyroCAN |
|----------------------------|---|--|--|-------------------------------|
| Output | See Above | Two-wire 4-20 mA | RS485 Modbus RTU | Raw CAN |
| Temperature Range | LT = -20 to +100 °C MT = 0 to 250 °C HT = 0 to 500 °C | | -20 to 500°C | -20°C to 1000°C |
| Accuracy | ±1% of reading or ±1°C whichever is greater | | | |
| Repeatability | ± 0.5% of reading or ± 0.5°C whichever is greater | | | |
| Emissivity Setting | Fixed at 0.95 | Variable 0.2 to 1.0 via continuous 4-20 mA input | Adjustable 0.2 to 1.0 via RS485 Modbus | Adjustable 0.2 to 1.0 via CAN |
| Response Time | 240 ms (90% response) | | | 200 ms (90% response) |
| Spectral Range | 8 to 14 µm | | | |
| Supply Voltage | 24 V DC (28 V DC max.) | | 12 V DC (13 V DC max.) | 24 V DC (28 V DC max) |
| Min. Sensor Voltage | 6 V DC | | | 12 V DC |
| Max. Loop Impedance | 900 Ω (4-20 mA output) | | - | |
| Output Impedance | 56 Ω (voltage/thermocouple output) | - | | |
| Input Impedance | - | | 50 Ω | |
| Current Draw | 20 mA max. (PyroCouple -5 models: 3.2 mA @ 24 V DC) | | 50 mA max | |
| Baud Rate | - | | 9600 bps | 250 kbps* |
| Format | - | | 8 data bits, no parity, 1 stop bit * | - |

* Other configurations available upon request

MECHANICAL

| | PyroCouple | PyroEpsilon | PyroBus | PyroCAN |
|--------------------------|--|-------------|---------|---------|
| Construction | Stainless Steel | | | |
| Dimensions | 18 mm diameter x 103 mm long | | | |
| Thread Mounting | M16 x 1 mm pitch | | | |
| Cable Length | 1m (longer lengths available to order) | | | |
| Weight with Cable | 95 g | | | |

ENVIRONMENTAL

| | PyroCouple | PyroEpsilon | PyroBus | PyroCAN |
|------------------------|-------------------------|-------------|---------|-------------|
| Construction | IP65 | | | |
| Dimensions | 0°C to 70°C | | | 0°C to 90°C |
| Thread Mounting | 95% max. non-condensing | | | |





PYROCAN

Example data message received from sensor:

| Object Temperature | | | | Ambient Temperature | | | | | |
|--------------------|-----|------------|-------|---------------------|-------|------------|-------|-------|-------|
| Bytes | DLC | DATA0 | DATA1 | DATA2 | DATA3 | DATA4 | DATA5 | DATA6 | DATA7 |
| Value | 8 | 0x51 | 0x39 | 0xB2 | 0x41 | 0xA4 | 0x70 | 0xDF | 0x41 |
| Hex | | 0x41B23951 | | | | 0x41DF70A4 | | | |
| Encoding | | Float | | | | Float | | | |
| Decimal | | 22.28 °C | | | | 27.93 °C | | | |

PYROTUNE


| GENERAL SPECIFICATIONS | |
|----------------------------------|---|
| Output | 4-20 mA for emissivity adjustment of PyroEpsilon sensor |
| Supply Voltage | 24 V DC (13 V to 28 V DC) |
| Display Format | 3.5 digit LCD |
| Display Units | Emissivity (0.2 to 1.0) or current (4 - 20 mA) |
| Adjustment | Push-buttons (raise/lower/set) |
| MECHANICAL | |
| Construction screws | Polycarbonate with gasket, transparent lid (PC) and quick release |
| Mounting | Surface |
| Dimensions | 65 mm tall x 50 mm wide x 35 mm deep |
| Weight | 72 g |
| ENVIRONMENTAL | |
| Environmental Rating | IP65 |
| Ambient Temperature Range | 0°C to 70°C |
| Relative Humidity | 95% max. non-condensing |

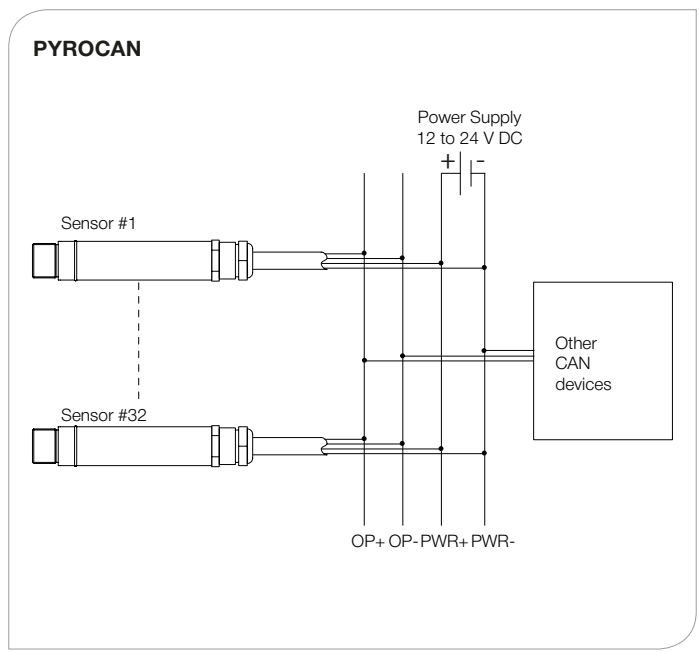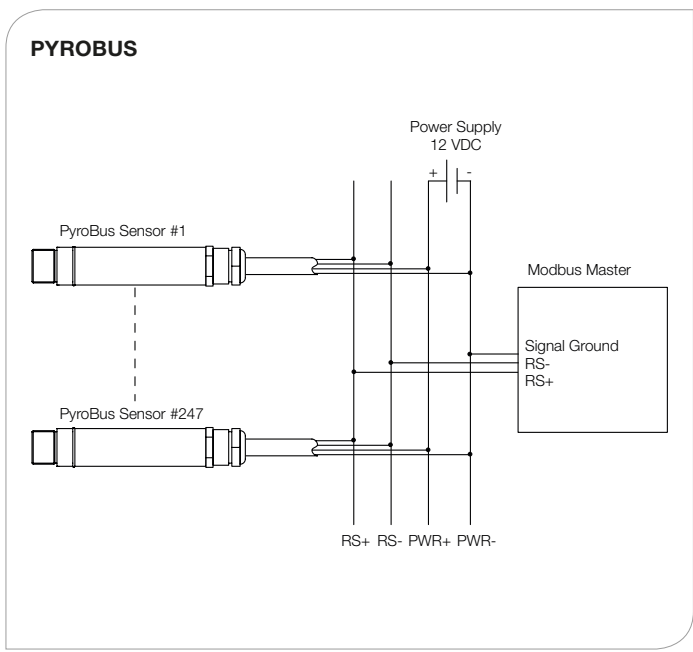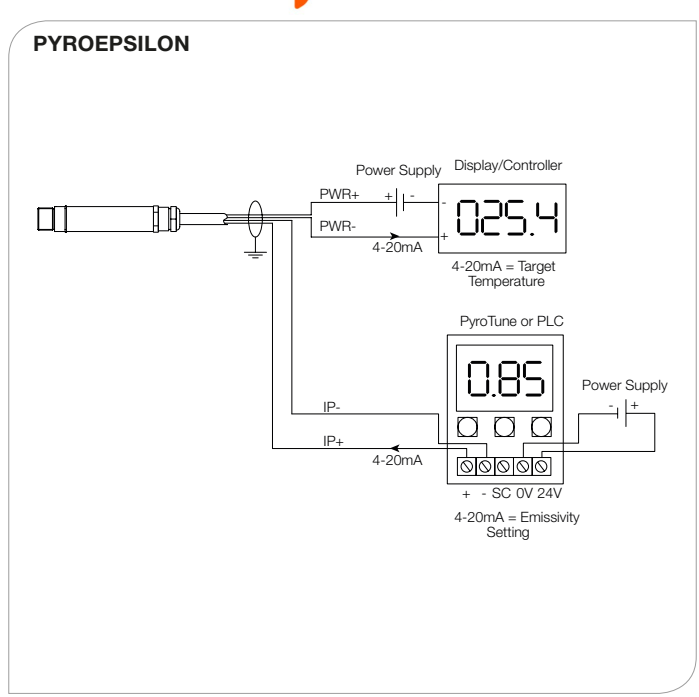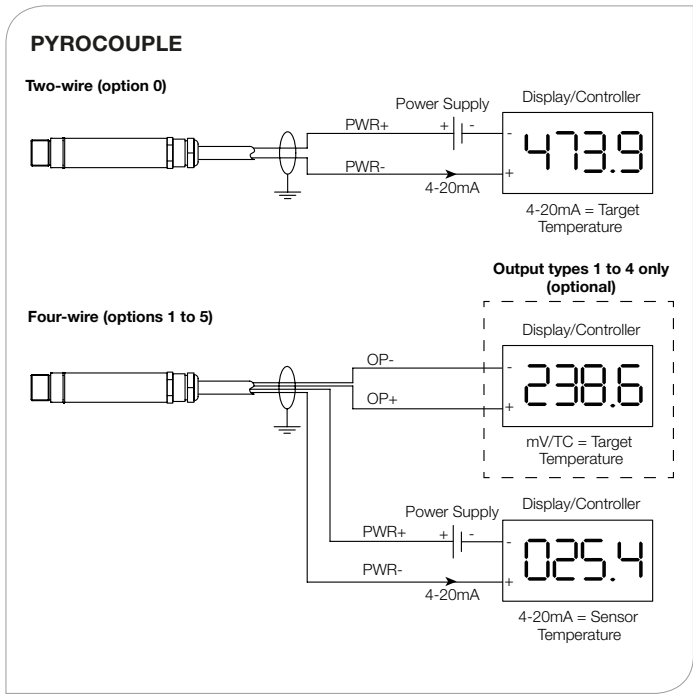


OPTICS

Diameter of target spot measured versus distance from sensing head (90% energy)

Optics available for PyroCouple, PyroEpsilon, PyroBus

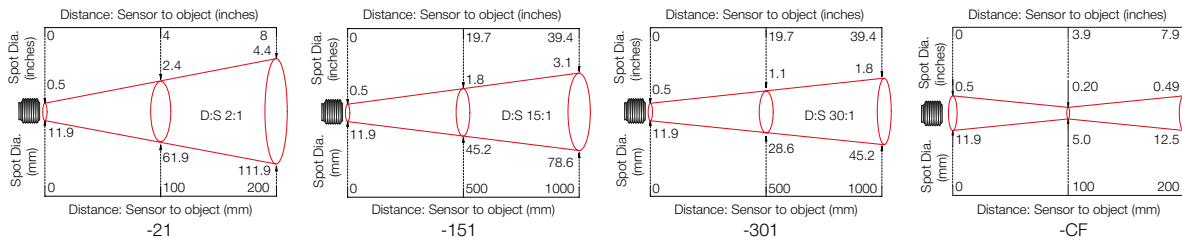

Optics available for PyroCAN

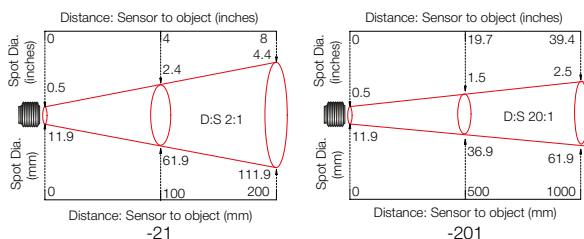

ACCESSORIES



Fixed mounting bracket **FBS**



Air purge collar for 2:1 optics **APSW**
or for all other optics (shown above) **APSN**



Laser sighting tool **LSTS**



Adjustable mounting bracket **ABS**



Air or water cooled jacket with air purge collar **WJ** (see Model Numbers)



Dual laser sighting bracket, adjustable **DLSBAS** or fixed **DLSBFS**



PyroTune emissivity adjuster **PT**
(for PyroEpsilon only)



6-channel touch screen interface for temperature display, configuration and data logging (PyroBus only) **PM180**



Protective plastic window with stainless steel holder **PWS**
(not compatible with PyroCouple)

MODEL NUMBERS



PC 151 MT 0 WJ

Cooling
(blank) = Sensor without cooling
WJ = Air/water cooled jacket with air purge collar

Output option (PyroCouple only)
0 = 2 wire, 4-20mA
1 = 4-wire, 0-50mV (target temp.), 4-20mA (sensor temp.)
2 = 4-wire, T Thermocouple (target temp.), 4-20mA (sensor temp.)
3 = 4-wire, J Thermocouple (target temp.), 4-20mA (sensor temp.)
4 = 4-wire, K Thermocouple (target temp.), 4-20mA (sensor temp.)
5 = 4-wire, 0-50 mV (target temp.), very low current draw

e.g. Model PC151HT-4 has a type K thermocouple output representing target temperatures of 0°C to 500°C plus a 4-20 mA output proportional to internal sensor temperature. For simplicity, the sensor temperature range is always set the same as the target temperature range

Temperature range (PyroCouple and PyroEpsilon only)
LT = -20 to +100 °C
MT = 0 to 250 °C
HT = 0 to 500 °C (not normally available on PC21 models)

Field of view
21 = 2:1 divergent optics
151 = 15:1 divergent optics
301 = 30:1 divergent optics
CF = Close-focus optics (focal spot size 5 mm at 100mm distance)
201 = 20:1 general-purpose divergent optics (PCAN series only)
Note: PyroCAN sensors are available with 2:1 and 20:1 optics only

Series
PC = PyroCouple: fixed emissivity, choice of analogue outputs
PE = PyroEpsilon: adjustable emissivity, 4-20 mA output
PB = PyroBus: fully configurable, RS485 Modbus communications
PCAN = PyroCAN: Adjustable emissivity, CAN Bus communications

Example Model Numbers: PC151MT-0, PE151MT, PB151, PCAN201

Miniature Infrared Temperature Sensors with Optional Touch Screen Interface



FEATURES

- Two-part sensor with miniature sensing head and configurable electronics module
- Touch screen (optional) for temperature indication and configuration
- Screen turns bright red in alarm condition for maximum visibility
- Adjustable emissivity setting on all models
- Data logging to MicroSD Card (optional) on touch screen models
- 4 to 20 mA or RS485 Modbus outputs
- Alarm relay outputs rated 24 V DC (optional) - no need for separate trip amplifier
- Maximum, minimum, average and instantaneous readings, peak or valley hold, reflected energy compensation

PYROMINI GENERAL PURPOSE

- High-ambient sensing heads (optional) withstand up to 120°C or 180°C without cooling
- Suitable for a wide range of target materials such as paper, plastics, food, painted surfaces, coated metal and many more
- Resistant to interference from movement of sensing head cable (-JA, -HA models) - ideal for mounting on robot arms
- Temperature ranges from -20°C to 1000°C

PYROMINI 2.2 HIGH TEMPERATURE

- Short-wavelength measurement for improved accuracy on reflective targets such as steel rollers and many other metal surfaces
- Temperature ranges from 100°C to 2000°C
- Choice of optics, including narrow options for long-distance measurements of very hot objects

GENERAL SPECIFICATIONS

| | PyroMini General Purpose | PyroMini 2.2 High Temperature |
|--|--|--|
| Temperature Range | Choice of ranges from -20°C to 2000°C (see Model Numbers) | |
| Output | 4 to 20 mA or RS485 Modbus (up to 247 sensors may be installed on each Modbus network) | |
| Alarm Relays (-CRT and -BRT models) | 2 x Single Pole Changeover alarm relays rated 24 V DC, 1 A, isolated 500 V DC | |
| Accuracy | ± 1°C or 1% of reading, whichever is greater | ± 2°C or 1% of reading, whichever is greater |
| Repeatability | ± 0.5°C or 0.5%, whichever is greater | |
| Field of View | Choice of optics (see Model Numbers on page 3) | |
| Emissivity Setting Range | 0.20 to 1.00 | |
| Emissivity Setting Method | -CRT and -BRT models: via touch screen -BB and -BRT models: via RS485 -CB models: via two rotary switches in electronics box | |
| Response Time, t90 | 240 ms (90% response) | |
| Spectral Range | 8 to 14 µm | 2.0 to 2.6 µm |
| Supply Voltage | 24 V DC ± 5% | |
| Maximum Current Draw | 100 mA | |
| Maximum Loop Impedance | CB and -CRT models: 900 Ω (4 to 20 mA output) | |
| Max Temp Span (-CRT models) | Full temperature range | |
| Min Temp Span (-CRT models) | 100°C | |

MECHANICAL

| | Sensing Head | Electronics Module |
|---------------------|----------------------------|--|
| Construction | Stainless Steel 316 | Cast aluminium |
| Dimensions | ∅ 18 x 45 mm (see diagram) | 98(w) x 64(h) x 36(d) mm |
| Mounting | M16 x 1 mm thread | Two M4 screw holes for wall mounting (see diagram) |

Cable Length (sensing head to electronics module)

1 m (standard), up to 30 m (optional)

Weight with 1 m Cable

390 g (approx)

Cable Connections

Removable screw terminal blocks (see Connections)

Conductor size: 28 AWG to 18 AWG

Output Cable Gland

Suitable for cable diameters 3.0 to 6.5 mm

ENVIRONMENTAL

| | Sensing Head | Electronics Module (without screen) | Electronics Module (with touch screen) |
|----------------------------------|----------------------------|-------------------------------------|--|
| Environmental Rating | IP65 (NEMA 4) | IP65 (NEMA 4) | - |
| Ambient Temperature Range | See below * | 0°C to 60°C | 0°C to 60°C |
| Relative Humidity | Maximum 95% non-condensing | Maximum 95% non-condensing | Maximum 95% non-condensing |
| RoHS Compliant | Yes | Yes | Yes |


TOUCH SCREEN (-CRT AND -BRT MODELS)

The optional backlit touch screen interface mounted in the lid of the electronics module provides a large, bright display of the measured temperature, as well as controls allowing full configuration of the sensor. The graph view shows the history of the measured temperature.



In alarm conditions, the display changes colour to provide an immediate and obvious alarm indication. Alarm modes and levels can be configured via the touch screen.

| Touch Screen Specifications | |
|------------------------------------|---|
| Touch Screen Display Format | 2.83" (72 mm) resistive touch TFT, 320 x 240 pixels, backlit |
| Configurable Parameters | Temperature range, temperature units, emissivity setting, reflected energy compensation, alarms, signal processing, Modbus address (-BRT models), date and time, data logging |
| Temperature Units | °C or °F configurable |
| Temperature Resolution | 0.1° |
| Alarm Configuration | Two alarms with adjustable level, individually configurable as HI or LO. Alarm 2 can be set to target temperature or sensing head internal temperature |
| Signal Processing | Average, peak hold, valley hold, minimum, maximum |
| Languages | English, Chinese (simplified), Japanese |

EXAMPLE SCREENSHOTS

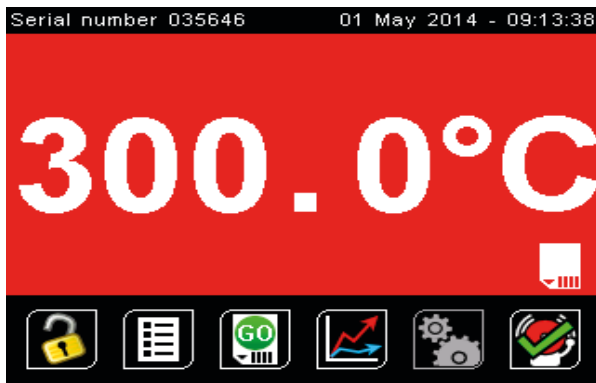

Screen shown with red background to indicate alarm condition

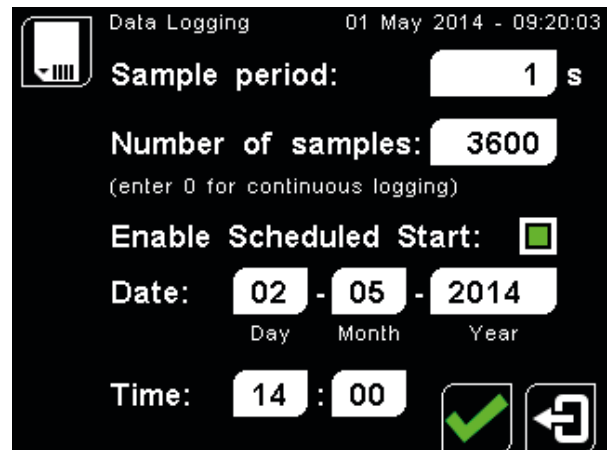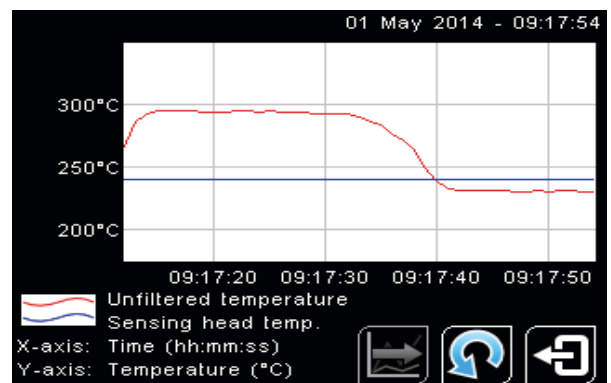

| Data Logging Specifications | |
|--------------------------------|--|
| Data Logging Interval | 1 to 86,400 seconds (1 day) |
| MicroSD Card | Max. capacity: 32 GB (not included) |
| Internal Clock Battery | 1 x BR 1225 3V (not included) |
| Variables Logged | Target temperature, sensing head temperature, electronics module temperature, max, min, average, emissivity setting, reflected energy compensation temperature, alarm events |
| File Format | .csv |
| Configurable Parameters | Sample period, number of samples, scheduled start date and time |

DATA LOGGING (-CRT AND -BRT MODELS)

The PyroMini can be used as a standalone data logger.

PyroMini models -CRT and -BRT include a MicroSD card slot for data logging, which can be configured via the touch screen interface. The user can select the sample rate and the number of samples to be taken and schedule the data logging to start at a certain time.

With a 2 GB card, the user can store 28.4 million readings, which provides almost 1 year's worth of data at the fastest possible sample rate of 1 per second.

Data is stored on the MicroSD card in .csv format and can be viewed and edited easily using spreadsheet software. Alarm events can also be logged to the MicroSD Card.

A MicroSD card with SD card adapter is available as an optional accessory.

The MicroSD card slot and battery holder are located on the touch screen circuit board in the lid of the PyroMini. Readings are time and date stamped using the sensor's internal clock. The clock is reset when the power is disconnected, or it will continue if the optional battery is fitted.

MODEL NUMBERS

| Series | Sensing Head Operating Temperature Range (General Purpose only) | Field of View | Measurement Temperature Range | Output and Interface |
|--|---|------------------------|-------------------------------|------------------------|
| PM (PyroMini - General Purpose) | MA | 21 151 301 CF | LT MT HT XT | CB |
| | | | CT | CRT BB BRT |
| | HA JA | 201 | HT XT | CB |
| | | | CT | CRT BB BRT |
| PM2.2 (PyroMini 2.2 - High Temperature) | - | 151 | PT | CB CRT BB BRT |
| | | 251 751 CF | MT HT | |

SENSING HEAD OPERATING TEMPERATURE RANGE (General Purpose models only)

- MA** 0°C to 60°C
- JA** 0°C to 120°C
- HA** 0°C to 180°C


The sensing head on -JA and -HA models is able to withstand ambient temperatures of up to 120°C (-JA) and 180°C (-HA) without cooling. Both models are available with 20:1 optics.

There is no need to supply cooling air or water, and the miniature sensing head is much smaller than bulky, cooled sensors.




FIELD OF VIEW (PyroMini - General Purpose)

Diameter of target spot measured versus distance from sensing head - 90% energy

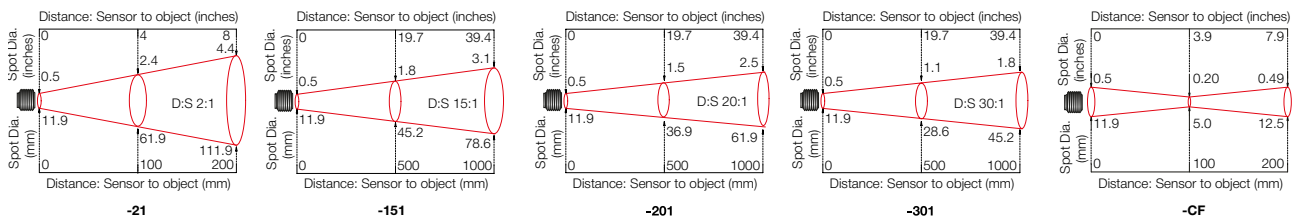


FIELD OF VIEW (PyroMini 2.2 - High Temperature)

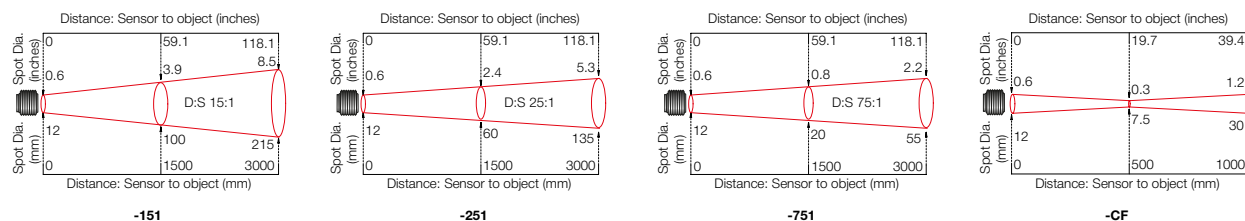


MEASUREMENT TEMPERATURE RANGE (°C)

PyroMini (General Purpose)

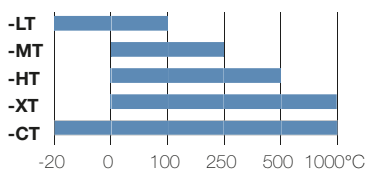

PyroMini 2.2 (High Temperature)

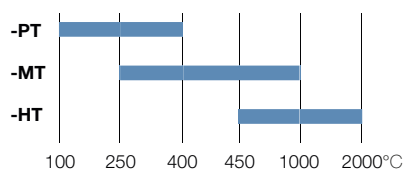

OUTPUT AND INTERFACE


- CB** 4 to 20 mA output, no screen
- CRT** 4 to 20 mA output and two alarm relay outputs, with touch screen
- BB** RS485 Modbus output, no screen
- BRT** RS485 Modbus output and two alarm relay outputs, with touch screen

-CB models: Fixed 4 to 20 mA output scale (e.g. -XT: 0°C @ 4 mA, 1000°C @ 20 mA)


-CRT models: 4 to 20 mA output is configurable within this range

-BRT and -BB models: Digital output, full temperature range

-CB and -CRT models

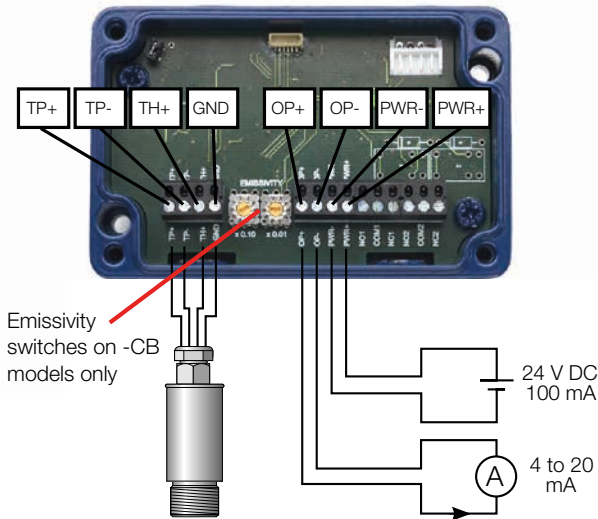


-BB and -BRT models

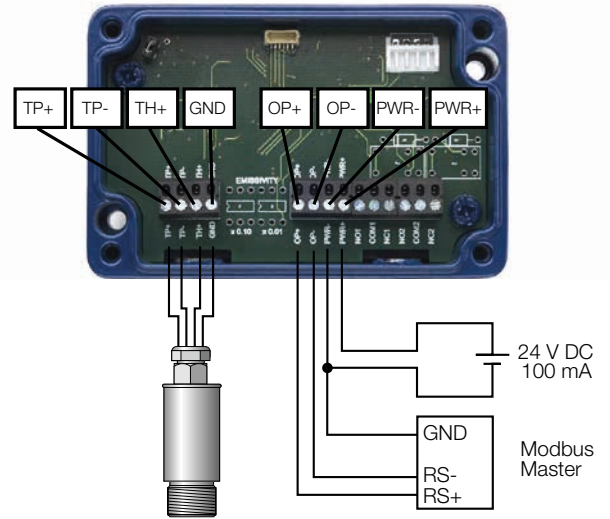


DIMENSIONS AND ACCESSORIES


Electronics Module

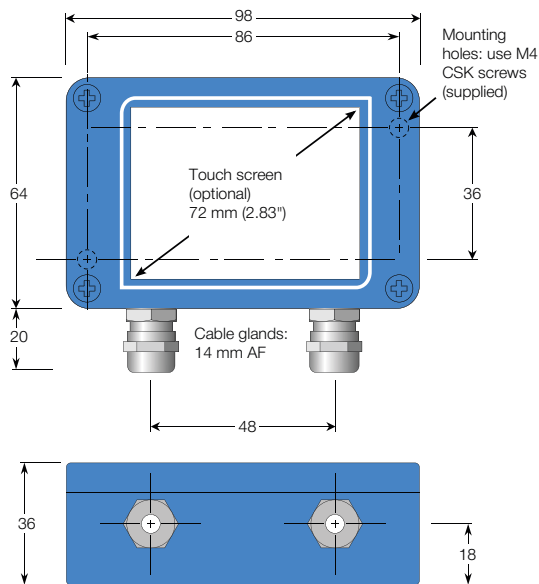

Sensing Head

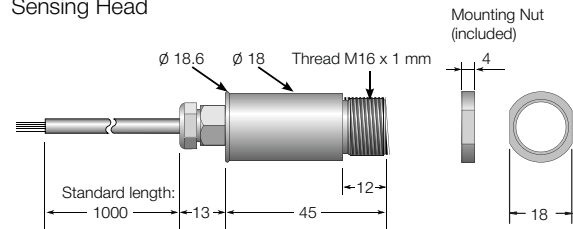

Air Purge Collar

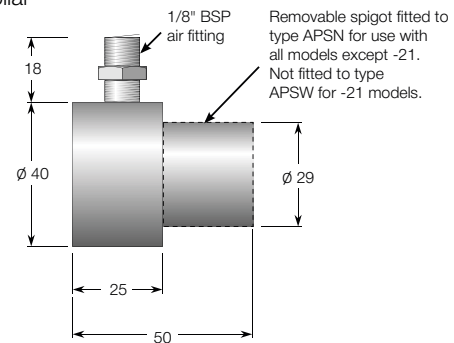

All dimensions in mm

ACCESSORIES ALSO AVAILABLE

- MicroSD Card with SD Card adapter: stores logged data (-CRT and -BRT models) **MSD**
- Extended cable between sensing head and electronics module (PyroMini -MA models) **PMCE**, (PyroMini -HA and -JA models) **PMCEHT**, (PyroMini 2.2 models) **PM2.2CE**
- Calibration certificate **CALCERTA**
- Laser sighting tool **LSTS**
- Mounting bracket, Adjustable **ABS**, Fixed **FBS**
- Dual Laser Sighting Bracket, Adjustable **DLSBAS**, Fixed **DLSBFS**
- 6-channel Modbus temperature indicator with data logging **PM180**
- Protective plastic or silicon window in stainless steel holder (General Purpose models only) **PWS / SIWS**




USB Configurable Infrared Temperature Sensors with 4-20 mA Output



- Temperature ranges from -40°C to 2000°C
- 2-wire 4-20 mA output
- Fully configurable via USB using Modbus protocol. Cable and software included
- Specialised models for measuring metals, high-temperature objects or glass surfaces
- General-purpose models for most other applications
- Peak and valley hold mode allows easy measurement of objects on conveyors
- Stainless steel housing, sealed to IP65
- Quick and easy installation

CONNECTIONS

The sensor will operate with either the 4 to 20 mA cable connected, the USB cable connected, or both.

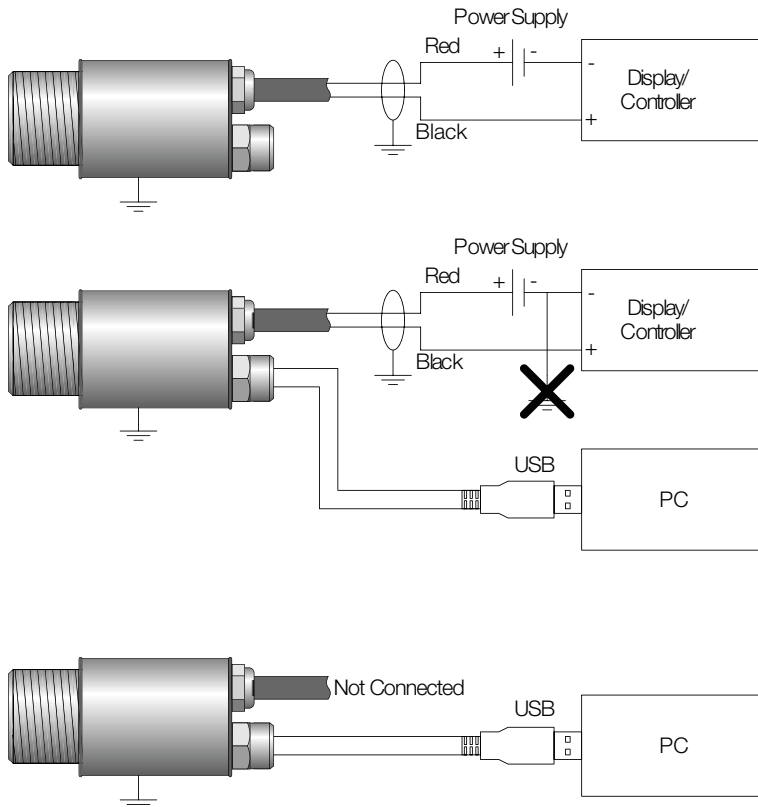

The PyroUSB Series measures temperatures from -40°C to 2000°C accurately and consistently, with an outstanding response time of 200 ms. The 4 to 20 mA output is compatible with almost any indicator, controller, recorder or data logger. without the need for special interfacing or signal conditioning.

A choice of measurement wavelengths is available to suit a range of applications.

General-purpose PUA8 (8-14 μm) models can measure from -40°C to 1000°C. They are suitable for measuring high-emissivity materials such as paper, thick plastics, food, pharmaceuticals, rubber, asphalt and painted surfaces. These models are capable of measuring very low temperatures, so they are ideal for sub-zero measurements in the food, logistics and storage industries.

Short-wavelength PUA2 (2.2 μm) models have a choice of temperature ranges from 45°C to 2000°C. They provide a more accurate reading when measuring low-emissivity materials such as many reflective metals. They are also capable of measuring through glass viewports.

Glass PUA5 (5 μm) models have a choice of temperature ranges from 50°C to 1650°C. They are filtered at a wavelength where glass is least reflective, making them an ideal pyrometer for glass surface temperature measurement.

All models have USB communications. A USB cable and Windows software is included. All data is transmitted via Modbus, so it is also easy to configure and read temperatures from the sensor using third-party software. The USB cable has an IP65 connector at the sensor end. An IP65 cap protects the sensor when the USB cable is not connected.

SOFTWARE

The sensor is configurable via software. It is also possible to take temperature readings, see temperature charts and log data from the USB connection in real time.

There are three software options:

CalexConfig

Simple, touch-friendly software, compatible with versions of Windows from Vista onwards. CalexConfig is supplied with the sensor.


CalexSoft 2

Multi-channel software for all Calex sensors with digital communications. CalexSoft 2 is available to download free of charge from www.calex.co.uk. For more information, see the CalexConfig / CalexSoft 2 data sheet.

Third party software

The sensor's Modbus protocol allows it to be used with other Modbus software. Modbus protocol information is provided in the Operator's Guide.

CalexConfig

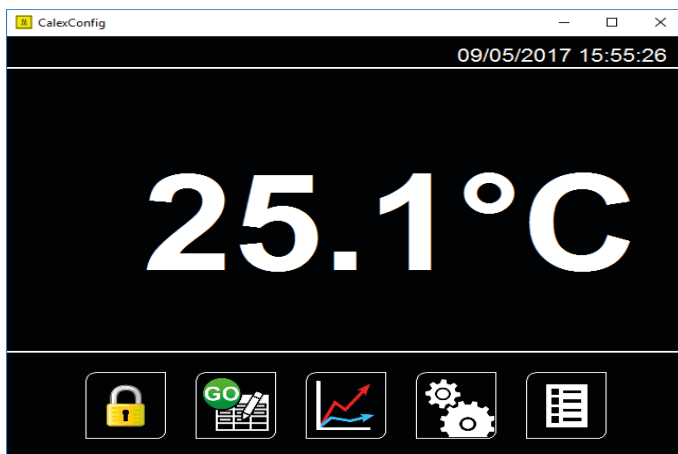

FEATURES (CalexConfig and CalexSoft 2)

Temperature display

Scrolling temperature chart

Data logging to comma-separated text file, compatible with Excel

PyroUSB sensor configuration:

Emissivity setting

Averaging

Peak/valley hold processing


Reflected energy compensation

4-20 mA output temperature scale


CalexSoft 2



DIMENSIONS

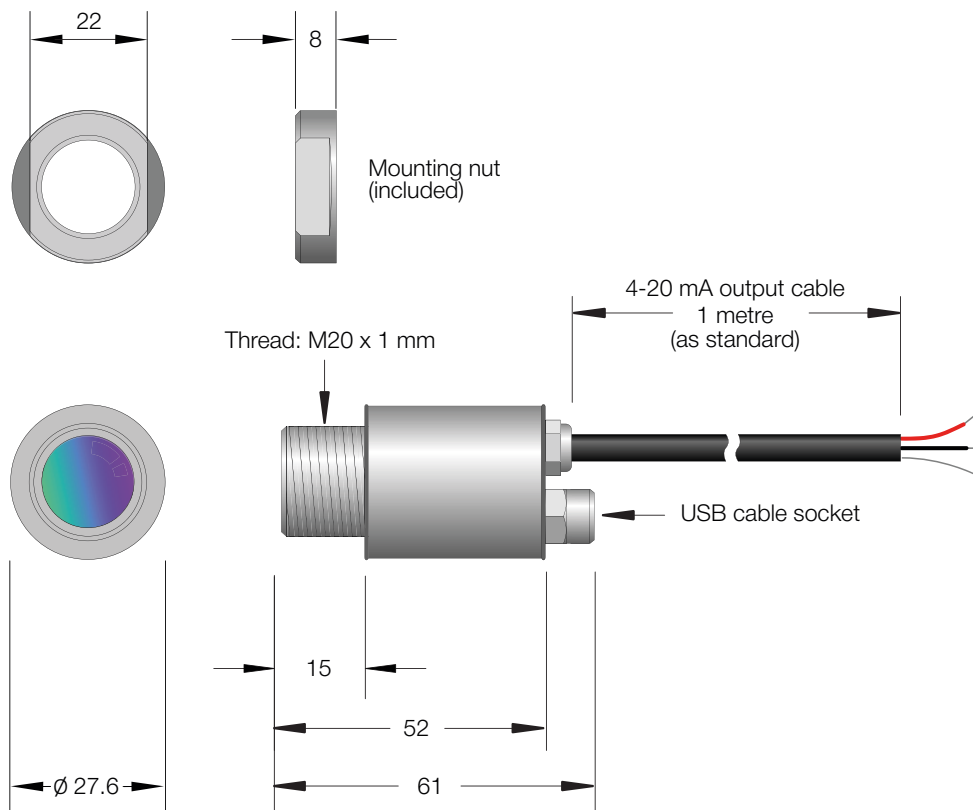


Optics (PUA2 and PUA5)

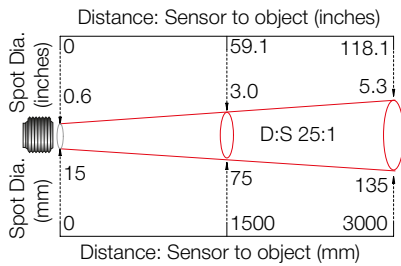


251

Optics (PUA8)

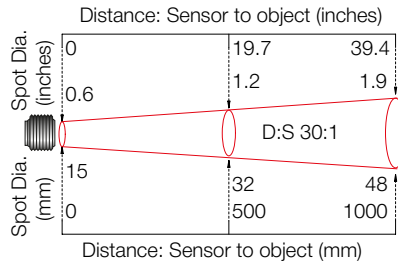


301

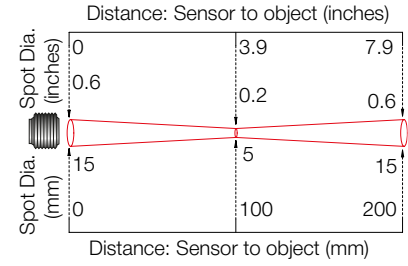


CF

Optics (PUA2)

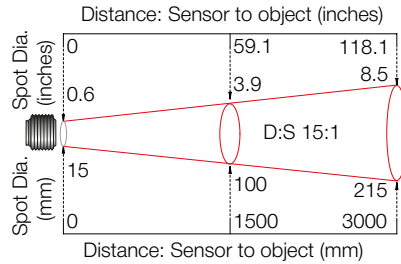

151

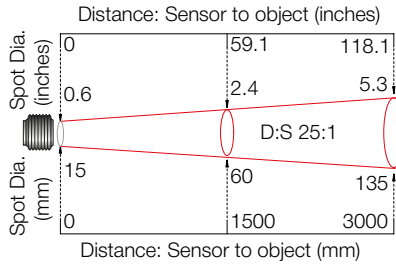

251

General Specifications

| Model | PUA2 | PUA5 | PUA8 |
|--------------------------------------|--|--|-----------------|
| Spectral Response | 2.2 μm | 5 μm | 8 to 14 μm |
| Application | Ferrous metals and high-temperature targets | Glass | General purpose |
| Temperature range | Choice of ranges from 45°C to 2000°C | Choice of ranges from 50°C to 1650°C | -40°C to 1000°C |
| Response time | 200 ms | | |
| Output | 2-wire, 4-20 mA, linear with measured temperature | | |
| Communications | USB 2.0 (removable USB cable and software included) using the Modbus protocol | | |
| Optics | Choice of divergent or focused optics for small or large targets at short or long distances (see Optics) | | |
| Accuracy | ± 2°C or 1% of reading, whichever is greater | ± 1°C or 1% of reading, whichever is greater | |
| Repeatability | ± 0.5°C or 0.5% of reading, whichever is greater | | |
| Emissivity Setting | 0.1 to 1.0 | | |
| Maximum Span (4-20 mA output) | Full temperature range | | |
| Minimum Span (4-20 mA output) | 100°C | | |

Electrical

| | |
|---------------------------------|-----------------------|
| Supply Voltage | 24 V DC (28 V DC max) |
| Sensor Voltage (minimum) | 6 V DC |
| Maximum Loop Impedance | 900 Ω @ 24 V DC |

Mechanical


| | |
|-------------------------------------|--|
| Construction | Stainless Steel |
| Dimensions | ∅ 27.6 x length 61 mm including cable glands |
| Thread mounting | M20 x 1 mm pitch, length 15 mm |
| 4-20 mA Output Cable Length | 1 m (standard), up to 30 m (optional) |
| Weight with 1 m Output Cable | 155 g |
| USB Cable Length | 1.8 m |

Environmental

| | |
|--|---|
| Environmental Rating | IP65 |
| Ambient (Operating) Temperature | 0°C to 70°C (cooled models are available for higher temperatures) |
| Relative Humidity | 95% max. non-condensing |

MINIMUM MEASURABLE TEMPERATURE

(PUA2-151-LT ONLY)

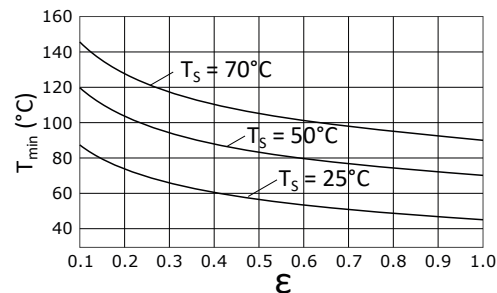

Graph showing the minimum measurable object temperature (T_{min}), determined by surface emissivity (ϵ) and sensor temperature (T_s).

MODEL NUMBERS

| | | | | | | | |
|------------------|-------------|---|------------|---|------------|---|-----------|
| Short Wavelength | PUA2 | - | 251 | - | MT | - | WJ |
| Glass | PUA5 | - | 251 | - | GHT | - | WJ |
| General Purpose | PUA8 | - | 301 | - | | - | WJ |



Cooling

(blank) Sensor without cooling
WJ Air/water cooled jacket with air purge collar

Temperature range

PUA2

LT 45°C to 300°C
(151 models only)

PT 100°C to 400°C
(151 models only)

MT 250°C to 1000°C

HT 450°C to 2000°C

PUA5

GLT 50°C to 1000°C

GHT 200°C to 1650°C

PUA8

(blank) All models:
-40°C to 1000°C

Field of view

PUA2

151 15:1 divergent optics (LT & PT models only)

251 25:1 divergent optics

751 75:1 divergent optics

CF Close-focus optics (focal spot size

PUA5 7.5 mm at 500mm distance)

251 25:1 divergent optics

PUA8

301 30:1 divergent optics


CF Close-focus optics (focal spot size
5 mm at 100mm distance)

Spectral response

PUA2 2.2 μm, for measuring reflective metals and high-temperature objects

PUA5 5 μm, for measuring glass surface temperature

PUA8 8 to 14 μm, general-purpose, for most other applications

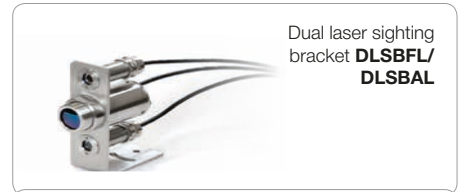

ACCESSORIES ALSO AVAILABLE

Fixed mounting bracket **FBL**

Extended analogue output cable (30 m max):

- for PyroUSB models without cooling **PUACE**

- for PyroUSB WJ models **PUACEHT**

3-point calibration certificate **CALCERTA**

USB Infrared Temperature Sensor for Benchtop, Laboratory and Education



- Miniature non-contact temperature sensor with USB communications
- Measures from -20°C to 1000°C
- USB cable and PC software included for data logging and configuration
- Open Modbus protocol - use your own software to communicate with the sensor

| SPECIFICATIONS | |
|---|---|
| Temperature Range | -20°C to 1000°C |
| Interface | USB |
| Accuracy | ±1% of reading or ±1°C whichever is greater |
| Repeatability | ± 0.5% of reading or ± 0.5°C whichever is greater |
| Emissivity Setting | 0.2 to 1.0 |
| Response Time, t_{90} | 125 ms (90% response) |
| Spectral Range | 8 to 14 μ m |
| Supply Voltage | 5 V DC (provided by USB) |
| Supply Current | 50 mA max. |
| VIRTUAL COM PORT | |
| Baud Rate | 9600 baud * |
| Format | 8 data bits, no parity, 1 stop bit * |
| Protocol | Modbus over Serial Line |
| * Other configurations available upon request | |
| CONFIGURATION | |
| Configuration Method | Via USB using CalexConfig software (included), CalexSoft 2, or Modbus |
| Configurable Parameters | Emissivity Setting, Averaging, Reflected Energy Compensation |
| MECHANICAL | |
| Construction | Stainless Steel |
| Dimensions | 18 mm diameter x 45 mm long |
| Thread Mounting | M16 x 1 mm pitch |
| Cable Length | 1.5 m |
| Weight with Cable | 85 g |
| ENVIRONMENTAL | |
| Environmental Rating | IP65 |
| Ambient Temperature | 0°C to 75°C |
| Relative Humidity | 95% max. non-condensing |
| CONFORMITY | |
| RoHS Compliant | Yes |
| Electromagnetic Compatibility | EN61326-1, EN61326-2-3 (Electrical Equipment for Measurement, Control and Laboratory Use - EMC Requirements - Industrial) |

The PyroMiniUSB is a miniature infrared sensor that measures the surface temperature of a solid or liquid without contact. It can measure non-metal surfaces between -20°C and 1000°C, with a response time of just 125 ms.

Materials including paper, thick plastics, rubber, food and organic materials, as well as painted metals and most dirty, rusty or oily surfaces, are measured accurately, safely and cleanly.

A choice of optics is available to measure small or large targets at distances ranging from a few millimetres up to tens of metres.

It has a rugged stainless steel housing, sealed to IP65, and is built to withstand ambient temperatures of up to 75°C.

COMPACT

The sensor is just 45 mm long (plus cable gland), so it can fit into very small spaces. The USB interface is built into the sensor, so there is no need for additional bulky interface modules.

BENCHTOP AND LABORATORY

With the precision and robustness of our industrial pyrometers, and the plug-and-play convenience of USB, the PyroMiniUSB is the ideal benchtop temperature sensor for testing and experimentation.

EDUCATION

The PyroMiniUSB is ideal for teaching science concepts such as emissivity, reflectivity, thermal conductivity, energy transfer, insulation and internal energy.

SOFTWARE

Two Windows applications are available:

CalexConfig is simple, touch-friendly software for use with one sensor. It is supplied with the sensor.

CalexSoft 2 is capable of displaying, graphing and logging temperature data from multiple sensors at the same time. It is available as a free download from www.calex.co.uk.

Both programs allow temperature display, temperature graphs, data logging and sensor configuration.

For more information, please see the CalexConfig / CalexSoft 2 data sheet.

It is also possible to use third-party Modbus software to communicate directly with the sensor.




CalexConfig




CalexSoft 2

OPTICS

Diameter of target spot measured versus distance from sensing head (90% energy)

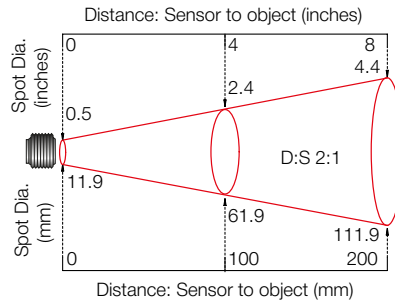


PMU21

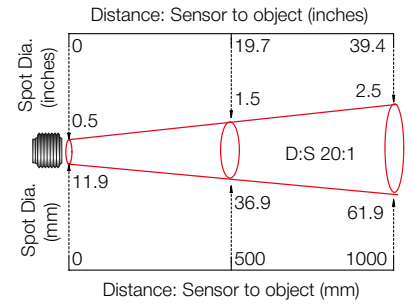


PMU201

MAJOR DIMENSIONS

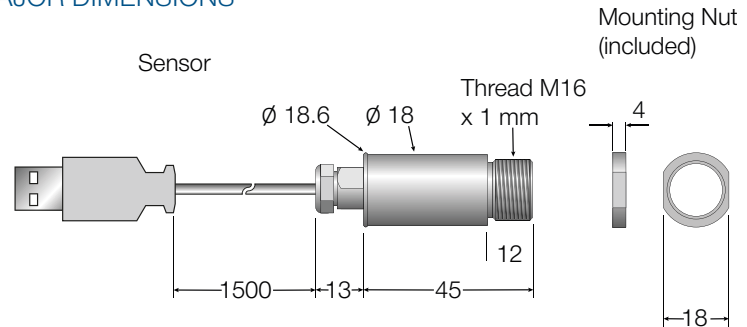

Air Purge Collar (optional)

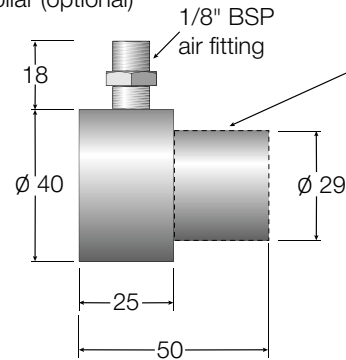

Removable spigot fitted to type APSN for use with -201 models. Not fitted to type APSW for -21 models.

All dimensions in mm

ACCESSORIES



Adjustable mounting bracket **ABS**

Fixed mounting bracket **FBS**

Calibration certificate **CALCERTA**

Laser sighting tool **LSTS**

Fixed or Adjustable mounting bracket with continuous laser sighting **DLSBFS / DLSBAS**

MODEL NUMBERS



PMU

201

Field of view
21 = 2:1 divergent optics
201 = 20:1 divergent optics

Series
PMU = PyroMiniUSB sensor







PyroCube sensor with optional touch screen interface

- High performance infrared temperature sensors
- Choice of specialised models for demanding applications
- Continuous LED sighting on all models shows position and size of measured spot while readings are being taken
- Current, voltage and alarm outputs
- Digital communications
- Optional touch-screen display with configuration and data logging



PYROCUBE SENSOR SPECIFICATIONS

| PyroCube Type | S | | F | | G | | | | |
|--|--|------|--|------|---|------|---|-------|-------|
| Application | General purpose | | Fast response | | Glass | | | | |
| Description |  <p>The general-purpose PyroCube S is suitable for measuring most non-reflective non-metals. Advantages over other general-purpose sensors are the built-in LED aiming light, fast response time, and small measured spot size.</p> | |  <p>The PyroCube F has a lightning-fast response time of 0.001 seconds.</p> | |  <p>Glass-specific measurement wavelength for improved accuracy when measuring glass surface temperature. G models are ideal for annealing, e.g. light bulb and fluorescent lamp manufacturing. GH models are suitable for high-temperature glass melting, such as in glass-to-metal sealing.</p> | |  | | |
| Temperature Range | 0°C - 500°C | | 50°C - 500°C Measurements below 50°C are possible with reduced stability | | 100°C - 1200°C Measurements below 100°C are possible with reduced stability | | 100°C - 2400°C Measurements below 100°C are possible with reduced stability | | |
| Analogue output scale (adjustable via optional touch screen module or RS232) | Factory set: 4 mA = 0°C 20 mA = 500°C | | Factory set: 4 mA = 50°C 20 mA = 1200°C | | Factory set: 4 mA = 50°C 20 mA = 2400°C | | Factory set: 4 mA = 50°C 20 mA = 2400°C | | |
| Response Time (adjustable up to 5 s via averaging function) | 10 ms | | 1 ms | | 50 ms | | 10 ms | | |
| Accuracy of Measurement † | ± 3°C or 1%, whichever is greater | | ± 3.5°C or 1%, whichever is greater | | All models: ± 3°C or 1%, whichever is greater -GH models: ± 2% above 1200°C | | | | |
| Repeatability † | ± 0.5°C | | ± 1°C | | ± 1°C | | ± 0.2% + 2°C | | |
| Temperature Resolution † | <0.5°C | | <0.7°C | | 0.5°C | | | | |
| Spectral Response | 2 - 7 µm | | | | 5 µm | | | | |
| Model No. PCU- | S1.6 | S1.6 | S5.5 | F3.5 | F7.0 | G7.0 | G20.0 | GH2.2 | GH4.5 |
| Focal Spot Diameter (mm) | 1.6 | 3 | 5.5 | 3.5 | 7 | 7 | 20 | 2.2 | 4.5 |
| Focal Distance (mm) | 35 | 70 | 120 | 100 | 200 | 180 | 500 | 150 | 300 |
| Maximum Measurement Distance (mm) | 150 | 200 | 300 | 300 | 500 | 500 | 1000 | 300 | 500 |
| Weight (without cable) | 85g | | | | | 85g | | 190g | |

| PyroCube Type | P | XS | | | M | | |
|--|--|--|---|---|--|-------|-----------------------------------|
| Application | Thin film plastics | Very small targets | | | Metals, low temperature | | |
| Description | | | | | | | |
| Description | Accurately measures the temperature of thin film plastics that cannot be measured with general-purpose sensors. Materials include polyolefins, polyamide, polyethylene, polypropylene, polystyrene, nylon, PVC, acrylic, polyurethane and polycarbonate. | Extremely small measured spot size. Applications include measuring individual electronic component temperatures on a circuit board, and plastic welding where the seam is very narrow. | | | Short-wavelength sensors for measuring metals as cool as 50°C, with a very fast response time of 0.001 seconds and a very small measured spot size | | |
| Temperature Range | 120°C - 350°C Measurements below 120°C are possible with reduced stability | 50°C - 500°C Measurements below 50°C are possible with reduced stability | 100°C - 500°C Measurements below 100°C are possible with reduced stability | 100°C - 600°C Measurements below 100°C are possible with reduced stability | | | |
| Analogue output scale (adjustable via optional touch screen module or RS232) | Factory set: 4 mA = 80°C 20 mA = 350°C | Factory set: 4 mA = 0°C 20 mA = 500°C | | | Factory set: 4 mA = 50°C 20 mA = 600°C | | |
| Response Time (adjustable up to 5 s via averaging function) | 10 ms | 10 ms | 50 ms | 1 ms | | | |
| Accuracy of Measurement † | ± 4°C | ± 3°C or 1%, whichever is greater | | ± 5°C | | | ± 3°C or 1%, whichever is greater |
| Repeatability † | ± 1°C | ± 1°C | | ± 2°C | | | ± (0.2% + 2°C) |
| Temperature Resolution † | 0.5°C | 0.5°C | | 1.5°C | | | 0.5°C |
| Spectral Response | 3.4 µm | 5 - 7 µm | | | 2.2 µm | | |
| Model No. PCU- | P12.0 | XSA0.7 | XSB1.0 | MA1.0 | MA2.0 | MA3.5 | MB11.0 |
| Focal Spot Diameter (mm) | 12 | 0.7 | 1 | 1 | 2 | 3.5 | 11 |
| Focal Distance (mm) | 200 | 40 | 100 | 50 | 100 | 200 | 200 |
| Maximum Measurement Distance (mm) | 500 | 100 | 300 | 100 | 200 | 400 | 500 |
| Weight (without cable) | 85g | 200g | 85g | 190g | | | 85g |

GENERAL SPECIFICATIONS (ALL MODELS)

| Measurement Specifications | |
|----------------------------|---|
| Emissivity Setting | Adjustable, 0.3 to 1.0, via RS232C or optional touch screen interface |
| Averaging | Adjustable up to 5 seconds |
| Target Sighting* | Red LED built-in as standard on all models, shows the position and size of the measurement area. Switchable on/off. |

* LED SIGHTING AND ALARMS

Sensor Only

These functions are selectable via RS232C and share a common connection, which is configurable either as an input to switch the LED sighting on/off, or an open drain alarm output, but not both at once.

Sensor with PM030

These functions may be configured via the PM030 interface. Two alarm relay outputs are provided in place of the open drain output.

| Environmental Specifications | |
|--------------------------------------|------------------------------|
| Environmental rating | IP67 |
| Operating ambient temperature | 0°C to 50°C |
| Storage temperature | -15°C to 70°C |
| Operating ambient humidity | 30% to 85% RH non condensing |

| Electrical Specifications | |
|--------------------------------|--|
| Outputs | 1 analogue output and 1 alarm output |
| Analogue Output Type | 4-20 mA (set by default), 0-20 mA, mV/°C or voltage±, selectable via optional PM030 touch screen interface |
| Alarm Output* | 1 open drain alarm output, rated 27 V DC, 0.2 A |
| Digital Communications | RS232C Modbus RTU, non-isolated |
| Output Cable Connection | Hardwired |
| Supply Voltage | 5 to 27 V DC, 100 mA max |

| Analogue Outputs (configurable via touch screen) | |
|---|--|
| Output Type | 0 to 1 V DC mV/°C 0 to 20 mA 4 to 20 mA |
| Effective Minimum Output | 30 mV 30 mV 0.2 mA 4.0 mA |
| Output Accuracy (additional to Measurement Accuracy) | ±1.5 mV ±1.5 mV ±0.02 mA ±0.02 mA |






PM030 - TOUCH SCREEN INTERFACE FOR PYROCUBE (ALL MODELS)


- Optional wall-mounted display, data logging, configuration and alarm unit for PyroCube sensor
- **Read the temperature**
The large, bright backlit temperature display is visible from a distance and turns red in an alarm condition.
- **Record the temperature history**
See a graph of the measured temperature, and log more than a year of data to a single MicroSD Card. The data is stored in a simple text format that can be imported easily into Excel.
- **Configure the sensor**
All the sensor's configuration settings can be adjusted via the intuitive touch screen interface.
- **Trigger temperature alarms**
Two alarms are individually configurable as high, low, band or error. The screen turns bright red to signal an alarm condition, and the built-in 24 V, 1 A relay outputs can be connected directly to alarm sounders and beacons.
- **Accurate measurements, even with reflections of hot objects**
Place the sensor outside an oven or furnace and accurately measure the temperature of objects Energy Compensation feature.

| PM030 Specifications | |
|--|---|
| Inputs | 1 x PyroCube sensor (any model) |
| Outputs | Retransmitted analogue output from PyroCube sensor, plus 2 relays, rated 24 V DC, 1 A |
| Display Format | 2.83" (72 mm) resistive touch TFT, 320x240 pixels, backlit |
| Touch Screen Display Format | 2.83" (72 mm) resistive touch TFT, 320 x 240 pixels, backlit |
| Storage | MicroSD Card (optional), max. 32 GB, equal to 16 years of data at the fastest sample rate of 1 per second |
| Data Logging Interval | 1 second to 1 day (configurable) |
| Internal Clock Battery | 1 x BR 1225 3V (not included) |
| Variables Logged | Instantaneous target temperature, hold temperature, alarm events |
| File format | .csv |
| Configurable Parameters (Data Logging) | Sample period Number of samples Scheduled start |
| Configurable Parameters (Alarm Logging) | Log times when triggered, acknowledged, reset Log data while triggered |


| Configurable Parameters |
|---|
| Languages English, Chinese (simplified), Japanese |
| Temperature units °C/°F |
| Displayed temperature |
| LED sighting on/off |
| Password |
| Date & time (for data logging time stamps) |
| Peak hold period, decay level |
| Averaging period |
| Correction (gain/offset) |
| Emissivity setting (with teach function) |
| Reflected energy compensation (with teach function) |
| Output type |
| Output temperature range |
| Polarity on error |
| Alarm mode, levels, hysteresis |

SCREENSHOTS (PM030 interface)

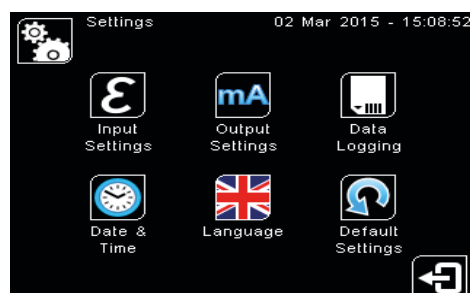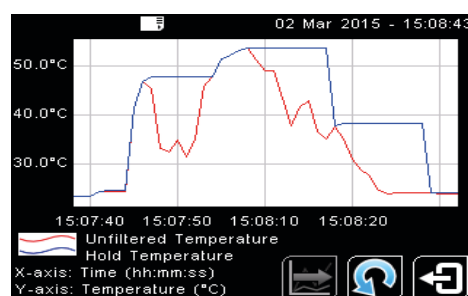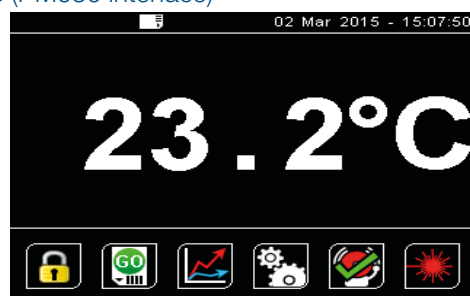


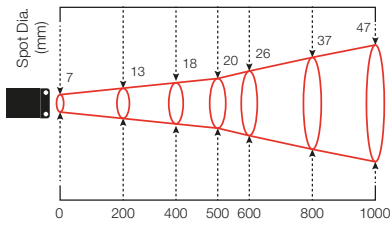


Distance: Sensor to object (mm)
PCU-G20.0

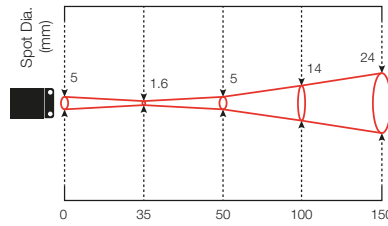


Distance: Sensor to object (mm)
PCU-S1.6

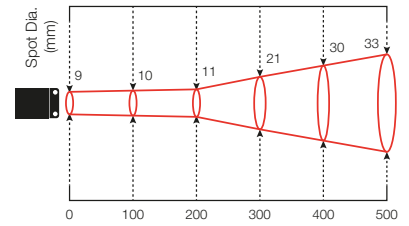


Distance: Sensor to object (mm)
PCU-MB11.0

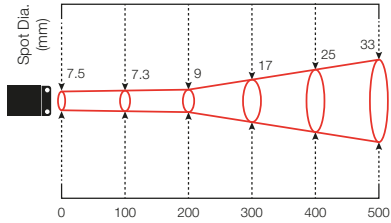


Distance: Sensor to object (mm)
PCU-G7.0

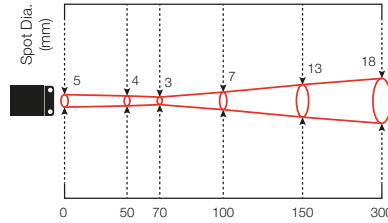


Distance: Sensor to object (mm)
PCU-S3.0

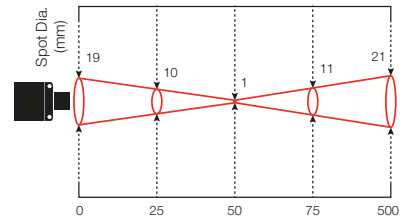


Distance: Sensor to object (mm)
PCU-MA1.0

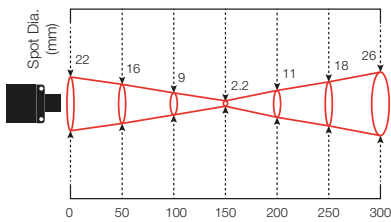


Distance: Sensor to object (mm)
PCU-GH2.2

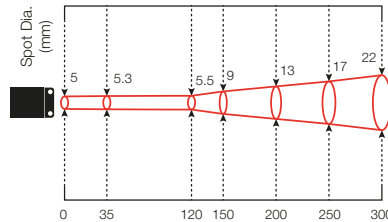


Distance: Sensor to object (mm)
PCU-S5.5

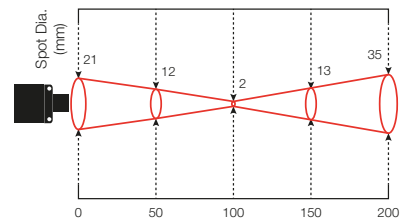


Distance: Sensor to object (mm)
PCU-MA2.0

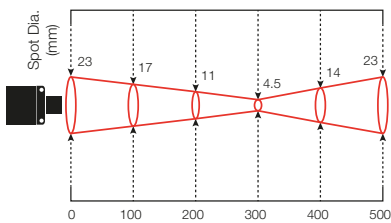


Distance: Sensor to object (mm)
PCU-GH4.5

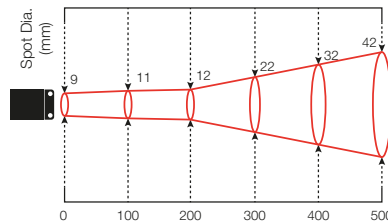


Distance: Sensor to object (mm)
PCU-P12.0

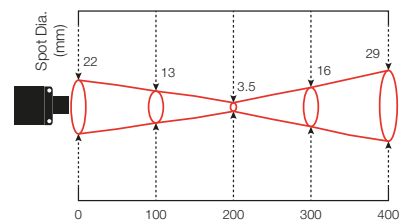


Distance: Sensor to object (mm)
PCU-MA3.5

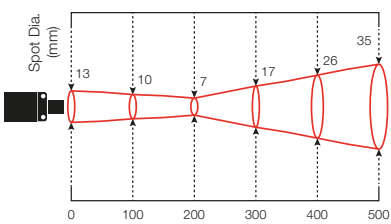


Distance: Sensor to object (mm)
PCU-F7.0

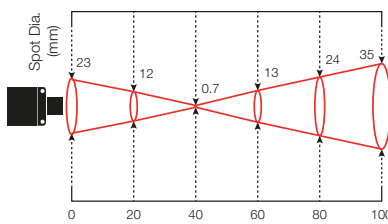

Distance: Sensor to object (mm)
PCU-XSA0.7

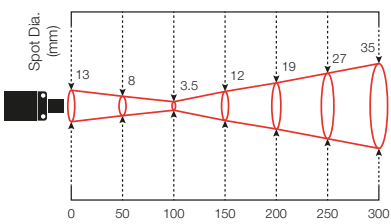


Distance: Sensor to object (mm)
PCU-F3.5

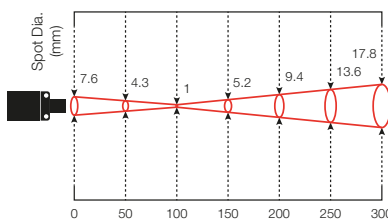


Distance: Sensor to object (mm)
PCU-XSB1.0

DIMENSIONS

PyroCube Sensor
S, F, G, P, XSB, MB models

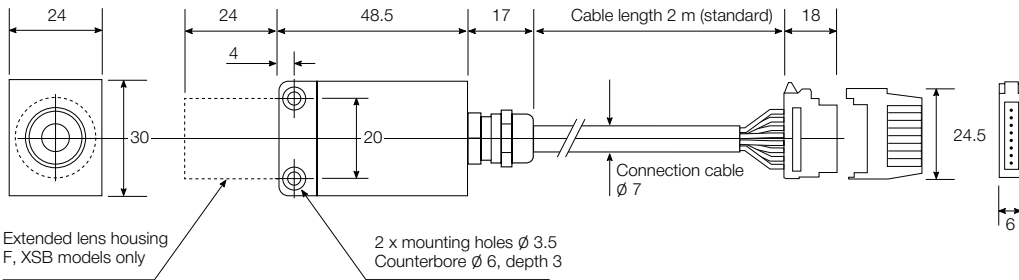

PyroCube GH, XSA, MA

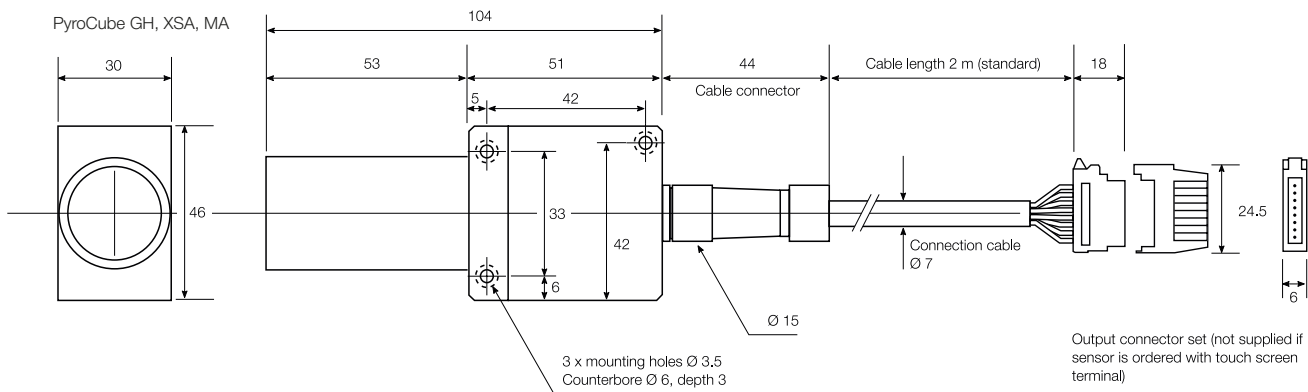


Output connector set (not supplied if sensor is ordered with touch screen terminal)


Easy-wire connectors for wire sizes
28 to 20 AWG (0.08 to 0.5 mm²)

Max sheath \varnothing 1.5 mm


PM030 Touch Screen Interface

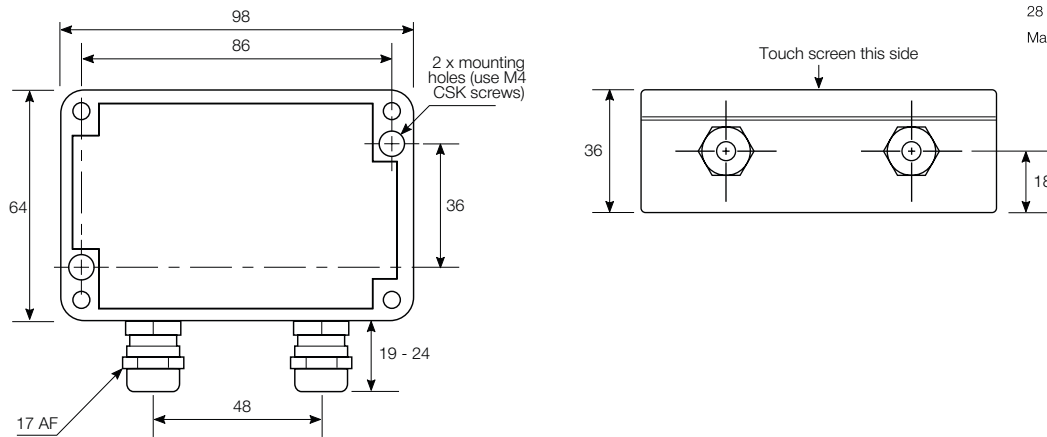

PYROCUBE CONNECTIONS - SENSOR ONLY

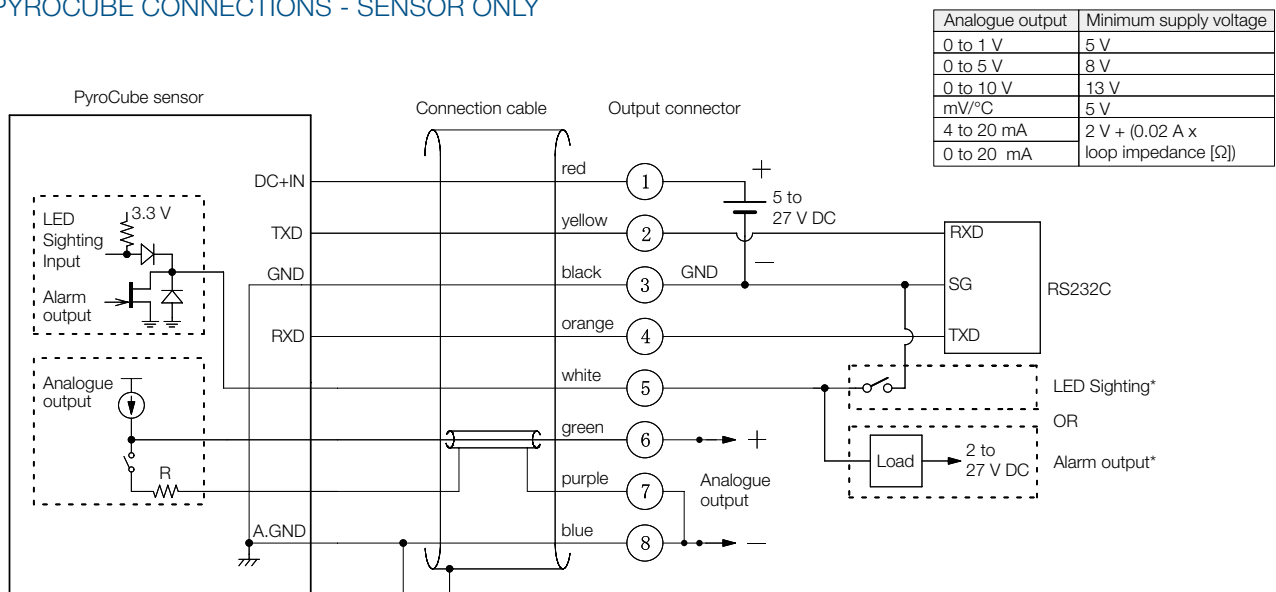

PM030 CONNECTIONS

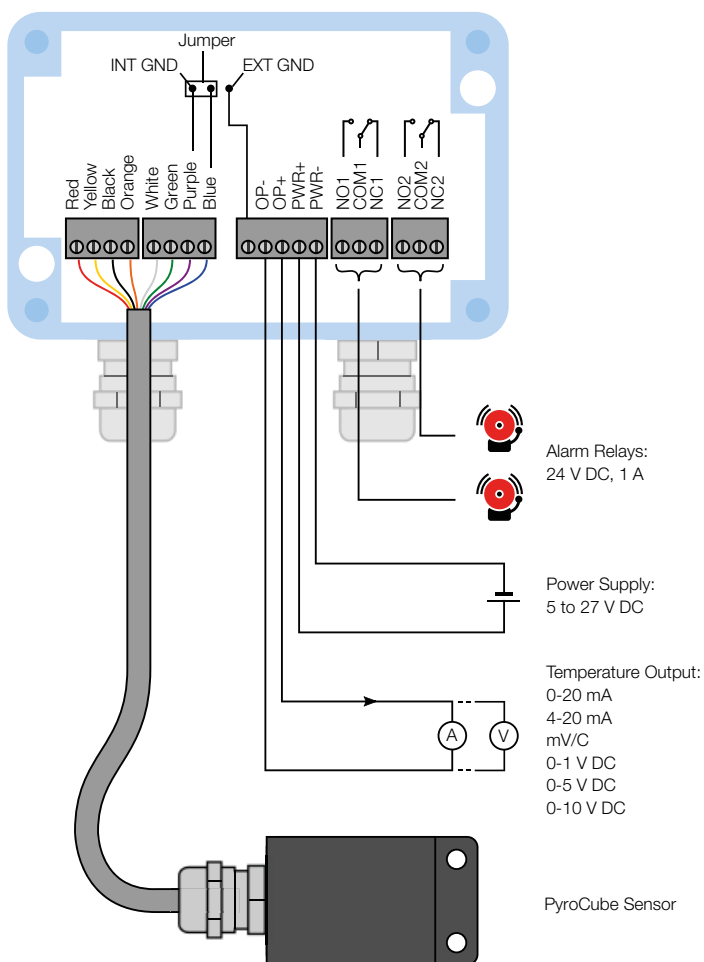

ACCESSORIES



MODEL NUMBERS



PCU - S1.6 - 2M - 1V

Series
PCU = PyroCube
sensor

PM030

Voltage output option
 1V = 0 to 1 V DC
 5V = 0 to 5 V DC
 10V = 0 to 10 V DC
 Note: All models also have 0-20 mA, 4-20 mA, and mV/°C outputs as standard.

Cable length
 2M = 2 metres
 5M = 5 metres
 10M = 10 metres

Response time and optics
 S1.6 = 10 ms response, 1.6 mm spot at 35 mm distance
 S3.0 = 10 ms response, 3.0 mm spot at 70 mm distance
 S5.5 = 10 ms response, 5.5 mm spot at 120 mm distance
 F3.5 = 1 ms response, 3.5 mm spot at 100 mm distance
 F7.0 = 1 ms response, 7.0 mm spot at 200 mm distance

Application and Optics
General Purpose
 S1.6 = 1.6 mm measured spot diameter at 35 mm distance
 S3.0 = 3 mm measured spot diameter at 70 mm distance
 S5.5 = 5.5 mm measured spot diameter at 120 mm distance
Fast Response
 F3.5 = 3.5 mm measured spot diameter at 100 mm distance
 F7.0 = 7 mm measured spot diameter at 200 mm distance
Glass
 G7.0 = 7 mm measured spot diameter at 180 mm distance
 G20.0 = 20 mm measured spot diameter at 500 mm distance
 GH2.2 = 2.2 mm measured spot diameter at 150 mm distance
 GH4.5 = 4.5 mm measured spot diameter at 300 mm distance

Thin Film Plastics
 P12.0 = 12 mm measured spot diameter at 200 mm distance
Very Small Measured Spot
 XSA0.7 = 0.7 mm measured spot diameter at 40 mm distance
 XSB1.0 = 1 mm measured spot diameter at 100 mm distance
Metals
 MA1.0 = 1 mm measured spot diameter at 50 mm distance
 MA2.0 = 2 mm measured spot diameter at 100 mm distance
 MA3.5 = 3.5 mm measured spot diameter at 200 mm distance
 MB11.0 = 11 mm measured spot diameter at 200 mm distance

Fibre Optic Infrared Temperature Sensor for Harsh Applications



- Temperature ranges from 250°C to 2000°C
- Miniature sensing head withstands 200°C ambient temperature
- Short measurement wavelength for improved accuracy on metals
- No electronics in the sensing head - ideal for use near induction heaters and strong electromagnetic fields
- Touch screen display with configuration and data logging
- Choice of analogue or digital output
- Alarm relays on all models
- Advanced signal processing functions
- Built-in laser sighting, simultaneous with measurement

GENERAL SPECIFICATIONS

Temperature Range

MT models: 250°C to 1000°C

HT models: 450°C to 2000°C

Maximum Temperature Span (-CRT models)

Full temperature range (up to 1550°C)

Minimum Temperature Span (-CRT models)

100°C

Output

4 to 20 mA or RS485 Modbus (up to 247 sensors may be installed on a single Modbus network)

Field of View

Choice of optics (see Optics)

Accuracy

±1% of reading

Repeatability

±0.5% of reading

Emissivity Setting Range

0.10 to 1.00

Emissivity Setting Method

-BRT models: via RS485

-CRT and -BRT models: via touch screen

Response Time, t_{90}

≥240 ms (90% response)

Spectral Range

2.0 to 2.6 μm

Supply Voltage

24 V DC \pm 5%

Maximum Current Draw

100 mA

Maximum Loop Impedance

-CRT models: 900 Ω (4 to 20 mA output)

Alarm Relays

2 x Single Pole Changeover alarm relays rated

24 V DC, 1 A, isolated 500 V DC

MECHANICAL

| | Sensing head | Electronics Module |
|--|---|--|
| Construction | Stainless Steel 316 | Cast aluminium |
| Dimensions | \varnothing 12 x 48 mm (see diagram) | 98(w) x 64(h) x 36(d) mm |
| Mounting | M12 x 1.5 mm thread | Two M4 screw holes for wall mounting (see diagram) |
| Fibre Optic Cable Length (sensing head to electronics module) | 3 m, 5 m or 10 m | |
| Cable Connections | Removable screw terminal blocks (see Connections) Conductor size: 28 AWG to 18 AWG | |
| Output Cable Gland | Suitable for cable diameters 3.0 to 6.5 mm | |

ENVIRONMENTAL

| | Sensing head | Electronics Module (without touch screen) | Electronics Module (with touch screen) |
|----------------------------------|----------------------------|---|--|
| Environmental Rating | IP65 (NEMA 4) | IP65 (NEMA 4) | |
| Ambient Temperature Range | 0°C to 200°C | 0°C to 60°C | 0°C to 60°C |
| Relative Humidity | Maximum 95% non-condensing | Maximum 95% non-condensing | Maximum 95% non-condensing |
| CE Marked | Yes | Yes | Yes |
| RoHS Compliant | Yes | Yes | Yes |

ELECTROMAGNETIC COMPATIBILITY STANDARDS:

EN61326-1, EN61326-2-3 (Electrical Equipment for Measurement, Control and Laboratory Use - EMC Requirements - Industrial)

TOUCH SCREEN


The backlit touch screen interface mounted in the lid of the electronics module provides a large, bright display of the measured temperature, as well as controls allowing full configuration of the sensor. The graph view shows the history of the measured temperature.

In alarm conditions, the display turns bright red to provide an immediate and obvious alarm indication. Alarm modes and levels can be configured via the touch screen.




TOUCH SCREEN SPECIFICATIONS

| | |
|------------------------------------|---|
| Touch Screen Display Format | 2.83" (72 mm) resistive touch TFT, 320 x 240 pixels, backlit |
| Configurable Parameters | Temperature range (-CRT models), temperature units, emissivity setting, reflected energy compensation, alarms, signal processing, Modbus address (-BRT models), date and time, data logging |
| Temperature Units | °C or °F configurable |
| Temperature Resolution | 0.1° |
| Alarm Configuration | Two alarms with adjustable level, individually configurable as HI or LO. Alarm 2 can be set to target temperature or sensing head internal temperature |
| Signal Processing | Average, peak hold, valley hold, minimum, maximum |
| Languages | English, Chinese (simplified), Japanese |

EXAMPLE SCREENSHOTS

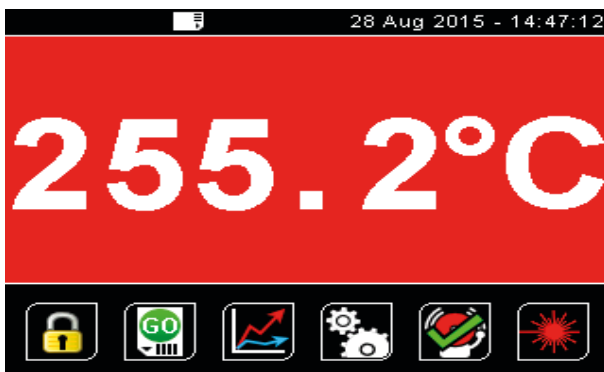

Screen shown with red background to indicate alarm condition

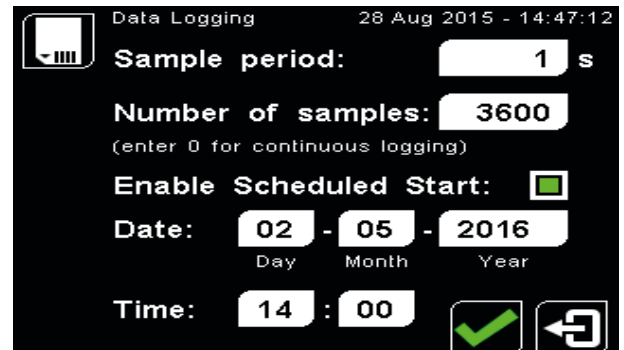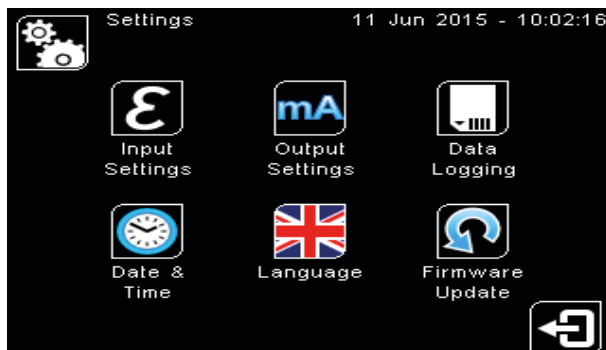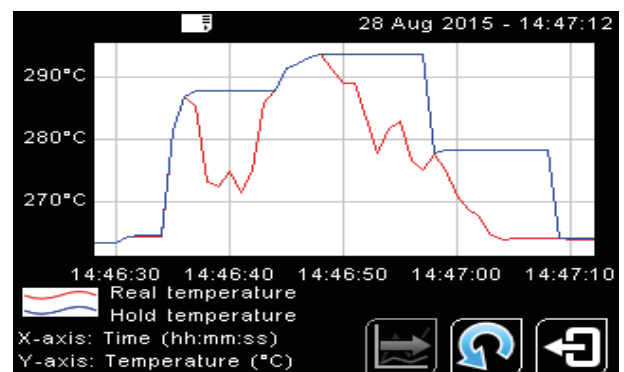

DATA LOGGING SPECIFICATIONS

| | |
|--------------------------------|--|
| Data Logging Interval | 1 to 86,400 seconds (1 day) |
| MicroSD Card | Max. capacity: 32 GB (not included) |
| Internal Clock Battery | 1 x BR 1225 3V (not included) |
| Variables Logged | Target temperature, electronics module temperature, max, min, average, emissivity setting, reflected energy compensation temperature, alarm events |
| File format | .csv |
| Configurable Parameters | Sample period, number of samples, scheduled start date and time |

DATA LOGGING (-CRT AND -BRT MODELS)

The FibreMini can be used as a standalone data logger.

All models include a MicroSD card slot for data logging, which can be configured via the touch screen interface. The user can select the sample rate and the number of samples to be taken and schedule the data logging to start at a certain time.

With a MicroSD card larger than 2 GB, years of data can be stored, even at the fastest possible sample rate of 1 per second.


Data is stored in .csv format and can be viewed and edited easily using spreadsheet software.

Alarm events can also be logged to the MicroSD Card.


A MicroSD card with SD card adapter is available as an optional accessory.

The MicroSD card slot and battery holder are located inside the electronics module. Readings are time and date stamped using the sensor's internal clock. The clock is reset when the power is disconnected, or it will continue if the optional battery is fitted.

CONNECTIONS AND DIMENSIONS

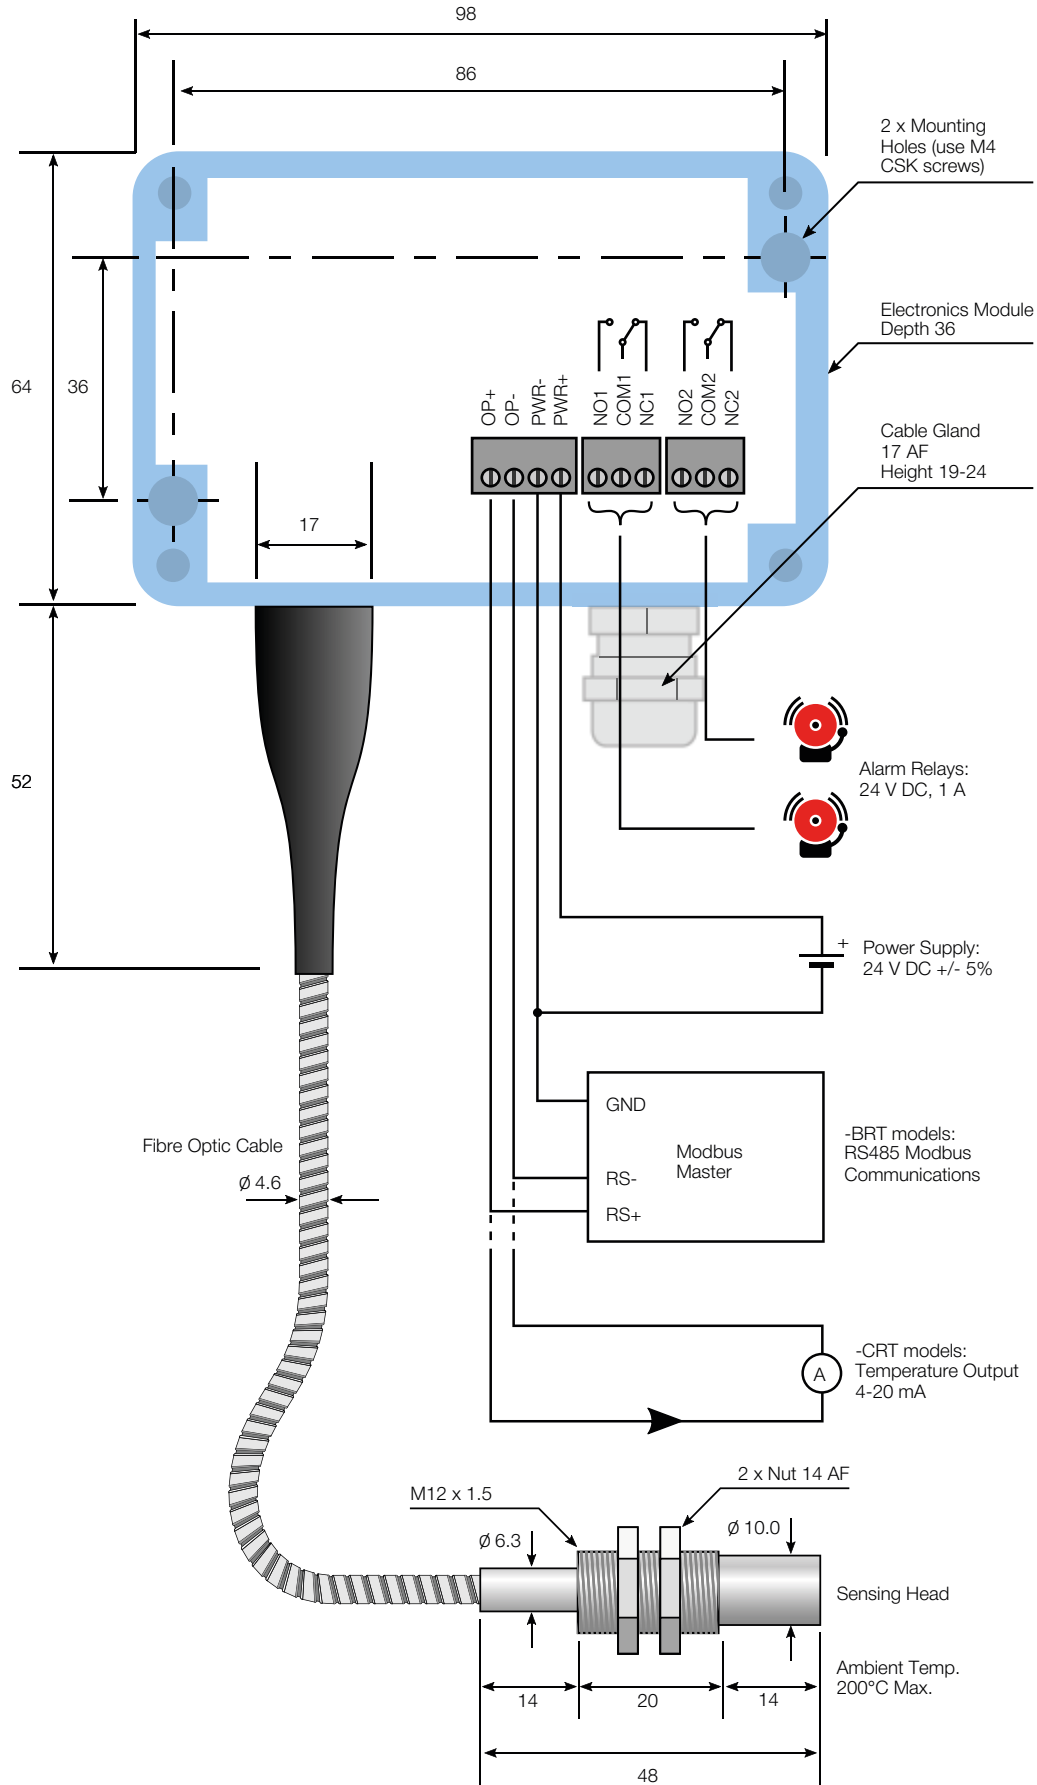

FIELD OF VIEW

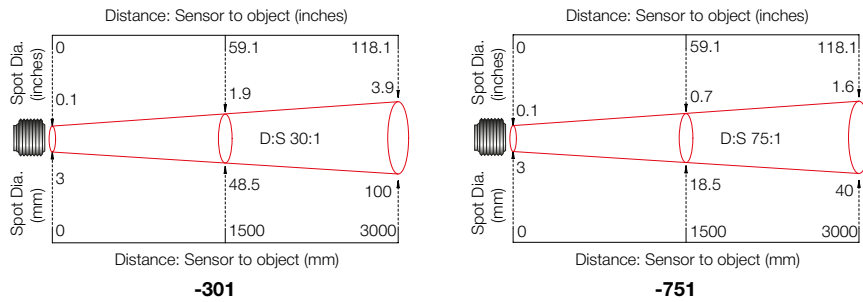


-301

-751

Diameter of target spot measured versus distance from sensing head - 90% energy


MEASUREMENT TEMPERATURE RANGE (°C)

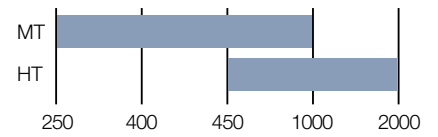

-CRT models: 4 to 20 mA output is configurable within this range

-BRT models: Digital output, full temperature range

MODEL NUMBERS

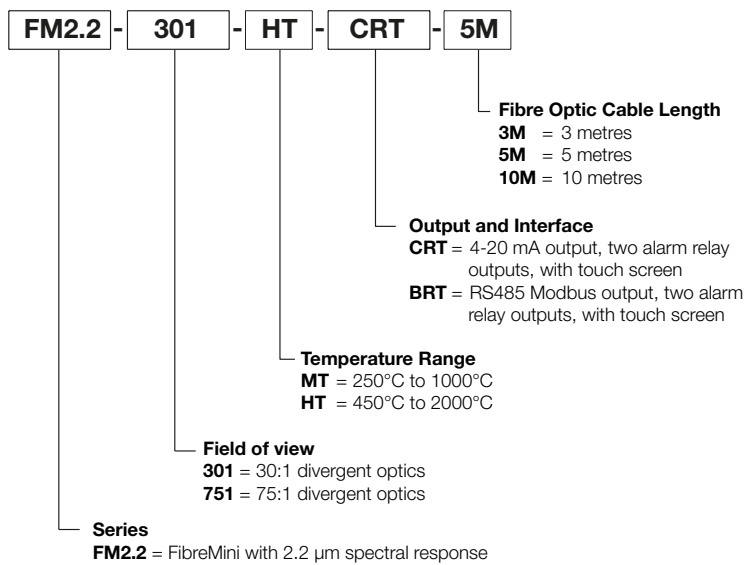

ACCESSORIES ALSO AVAILABLE

- MSD** MicroSD Card with SD Card adapter: stores logged data
- CALCERTA** Calibration certificate
- ABF** Adjustable mounting bracket
- FBF** Fixed mounting bracket
- APF** Air purge collar
- PM180** 6-channel Modbus temperature indicator with touch screen interface and data logging
- PMK** Panel Mounting Kit



- Suitable for hazardous areas, Zone 0, 1 and 2 (gas), and Zone 20, 21 and 22 (dust), with a suitable Intrinsically Safe isolator
- Temperature range: -20°C to 1000°C
- Two wire, 4-20 mA output
- Rescalable output and adjustable emissivity setting via optional USB adapter
- Fast response time and high stability
- Stainless steel 316 housing - ideal for offshore applications
- IP65 sealed
- Supplied with up to 25 m cable

General Specifications

| | |
|---|--|
| Temperature range | See table of Model Numbers |
| Maximum Temperature Span | 1000°C |
| Minimum Temperature Span | 100°C |
| Output | 4 to 20 mA |
| Field of View | See table of Model Numbers |
| Accuracy | ± 1°C or 1%, whichever is greater |
| Repeatability | ± 0.5°C or 0.5%, whichever is greater |
| Emissivity Setting Range | 0.20 to 1.00 (pre-set to 0.95) |
| Emissivity Setting Method | User configurable via USB interface |
| Response Time, t_{90} | 240 ms (90% response) |
| Spectral Range | 8 to 14 μ m |
| Supply Voltage | 12 to 24 V DC \pm 5% |
| Maximum Current Draw | 25 mA |
| Maximum Loop Impedance | See Application Guide (available separately) |

Mechanical

| | |
|------------------------------|--|
| Construction | Stainless Steel 316 |
| Major Dimensions | \varnothing 20 x length 150 mm (see Dimensions) |
| Mounting | M20 x 1.5 mm thread, length 46 mm, supplied with two mounting nuts |
| Cable Length | 5 m, 10 m or 25 m as standard (custom lengths also available) |
| Weight with 5 m Cable | 475 g |

Environmental

| | |
|----------------------------------|-------------------------------|
| Environmental Rating | IP65 (NEMA 4) |
| Ambient Temperature Range | 0°C to 70°C (Operating range) |
| Relative Humidity | Max. 95% non-condensing |
| CE Marked | Yes |
| RoHS Compliant | Yes |

Hazardous Area Classification

The ExTemp is ATEX, IECEx and TIIS certified.

| | |
|-------------------------------------|-----------------------------|
| ATEX Classification | Ex II 1GD |
| IECEx Classification (Gas) | Ex ia IIC T4 Ga |
| IECEx Classification (Dust) | Ex ia IIIC T135°C IP65 Da |
| Ambient Temperature Rating | -20°C \leq Ta \leq 70°C |
| Maximum DC Input Voltage | Ui = 28 V |
| Maximum Input Current | Ii = 93 mA |
| Maximum Input Power | Pi = 650 mW |
| Maximum Internal Capacitance | Ci = 8 nF |
| Maximum Internal Inductance | Li = 0 mH |
| ATEX Certificate Number | CML 14ATEX2079 |
| IECEx Certificate Number | IECEx CML 14.0032 |
| TIIS Certificate Number | TC21097 |

CONFIGURATION


The ExTemp sensor may be connected to a PC via the optional USB adapter and included Windows software.

Configurable settings include the emissivity setting, 4-20 mA temperature range, averaging, peak and valley hold processing and reflected energy compensation.


For more information on the software, please see the CalexConfig / CalexSoft 2 data sheet.




DIAMETER OF TARGET SPOT MEASURED VERSUS DISTANCE FROM SENSING HEAD

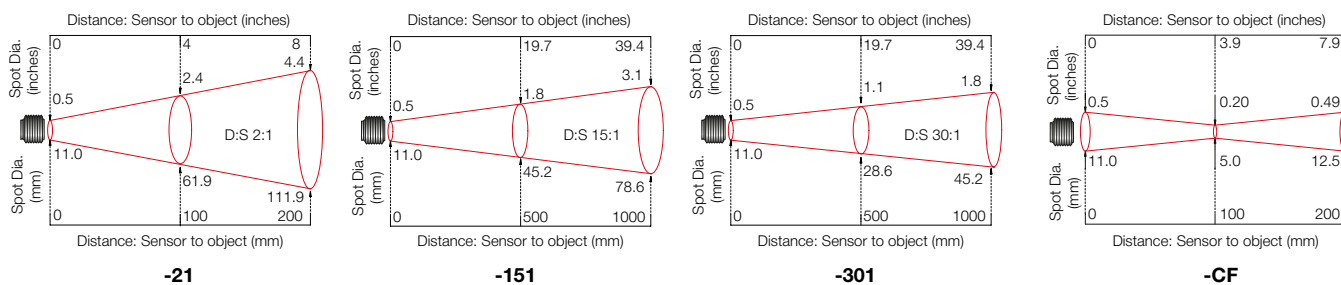


CONNECTIONS

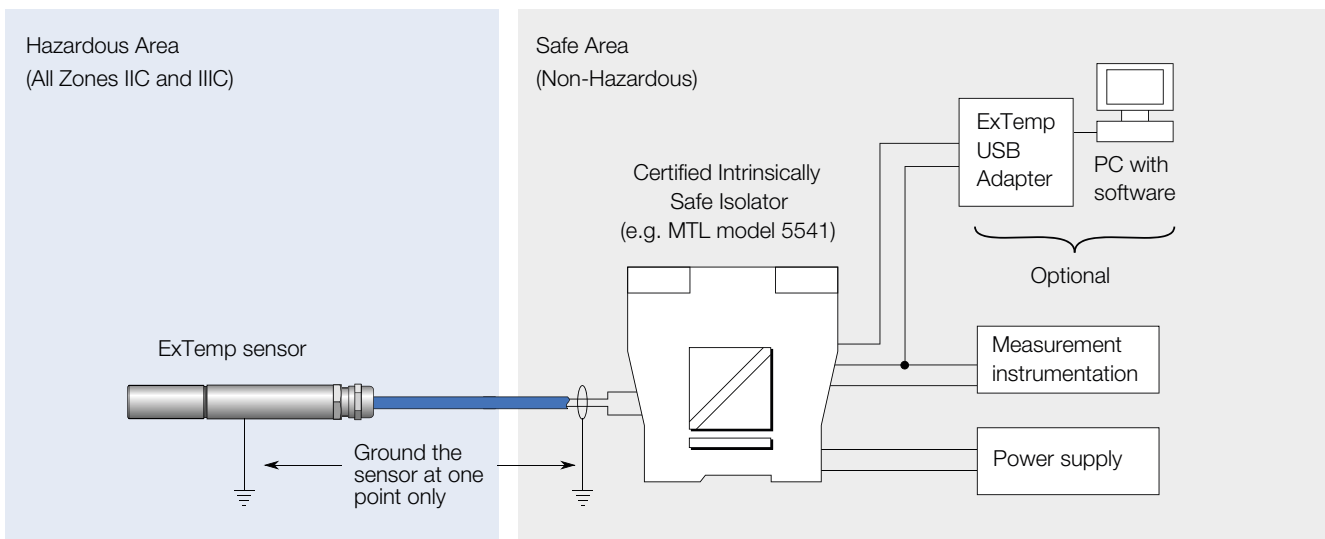

DIMENSIONS (mm)

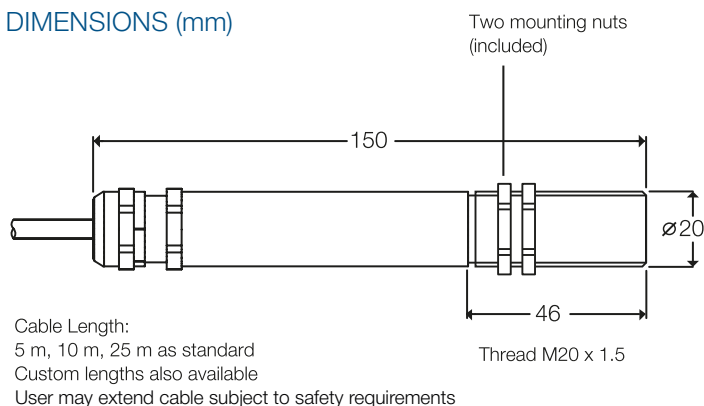

MODEL NUMBERS

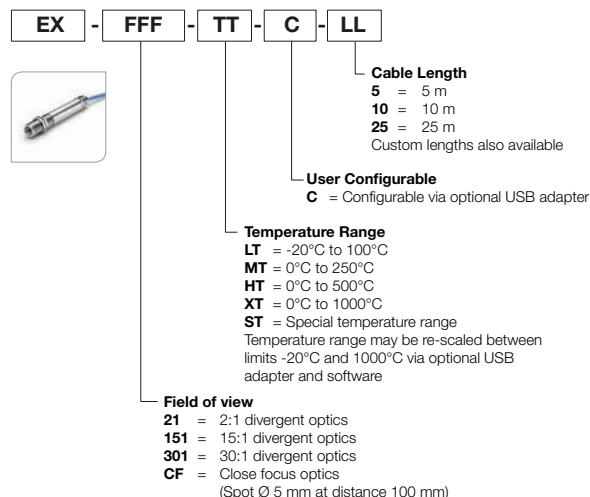

ACCESSORIES

- FBL** Fixed mounting bracket (1-axis rotation)
- ABL** Adjustable mounting bracket (2-axis rotation)
- APMW** Air purge collar (for 2:1 optics)
- APMN** Air purge collar (for all other optics)
- CALCERTA** Calibration certificate, 3 temperature points, UKAS traceable
- LCT** USB adapter and configuration software

Protective Windows

for Infrared Temperature Sensors

IR Viewport Windows



- Mount the window in a flange on your process
- Protect the sensor from high pressure, high temperature or vacuum
- Choice of materials to suit a range of sensors and applications
- Wide range of standard sizes, or custom-made to suit your requirements

Calex provides IR-transmissive windows in a choice of sizes. Windows are commonly circular, however other shapes are available, and we can provide windows manufactured to suit your requirements.

The material should be chosen to suit the type of sensor and the conditions in the process, such as the pressure and temperature. Short-wavelength sensors, such as the PyroUSB 2.2, PyroMini 2.2 and FibreMini, can view through glass, quartz and calcium fluoride. Other materials, such as zinc selenide and germanium, are required for use with long-wavelength (8 to 14 μm) sensors.

The sensor must have an adjustable emissivity setting to compensate for the small percentage of infrared energy lost to reflection and absorption by the window. Use this formula to ensure maximum accuracy.

$$\text{Emissivity setting} = \text{actual emissivity of target} \times \text{transmission of window}$$

MATERIALS

| Window Material | Transmission Range | Transmission (approx.) | Maximum Temperature |
|--|--------------------------|--|---------------------|
| Zinc selenide (ZnSe) | 4 to 14 μm | 72% | 250°C |
| Germanium (Ge) | 2 to 14 μm | 46% uncoated (around 90% if anti-reflective coated) | 70°C |
| Calcium fluoride (CaF ₂) | 0.2 to 7 μm | 94% | 1200°C |
| Sapphire (Al ₂ O ₃) | 0.2 to 4.5 μm | 85% | 2000°C |
| Quartz Crystal (SiO ₂) | 0.4 to 3 μm | 92% | 490°C |

ORDERING

These windows are inexpensive compared with the cost of replacing the lens of an infrared temperature sensor. Contact Calex for a quotation, or for assistance on choosing a suitable window.

Protective Plastic Window - ideal for the food and pharmaceutical industries



The protective plastic window models PWS and PWL are designed to help protect the germanium lens of Calex infrared temperature sensors from mechanical damage, and to help retain fragments of the lens if it is damaged.

To use the window, simply screw the stainless steel window holder onto the front of the sensor, tighten with a spanner, adjust the emissivity setting using the formula below, and begin taking measurements.

$$\text{Emissivity setting} = \text{actual emissivity of target} \times \text{window transmission}$$

SPECIFICATIONS

| Model | SIWS | PWS | PWL |
|---------------------------------------|---|-------------------------|------------|
| Mounting | M16 x 1 mm | | M20 x 1 mm |
| Compatible With | PyroEpsilon, PyroBus, Pyro CAN, PyroMini*, PyroMiniBus, PyroMiniUSB | | PyroUSB* |
| Transmission (8 to 14 μm) | 69% | 76.8% | 76.8% |
| Ambient Temperature Range | 0°C to 180°C | 0°C to 100°C** | |
| Window material | Silicon | IR-transmissive plastic | |
| Holder material | Stainless steel | | |

*General Purpose models only. Not compatible with Short Wavelength models.

** Do not exceed the ambient temperature limits of the sensor.


DLSB

Dual Laser Sighting Bracket



- Mounting bracket for Calex infrared temperature sensors
- Two parallel lasers indicate the centre of the measured spot
- Allows continuous targeting while taking measurements
- IP65 sealed
- Remote on/off switch

DIMENSIONS (mm)

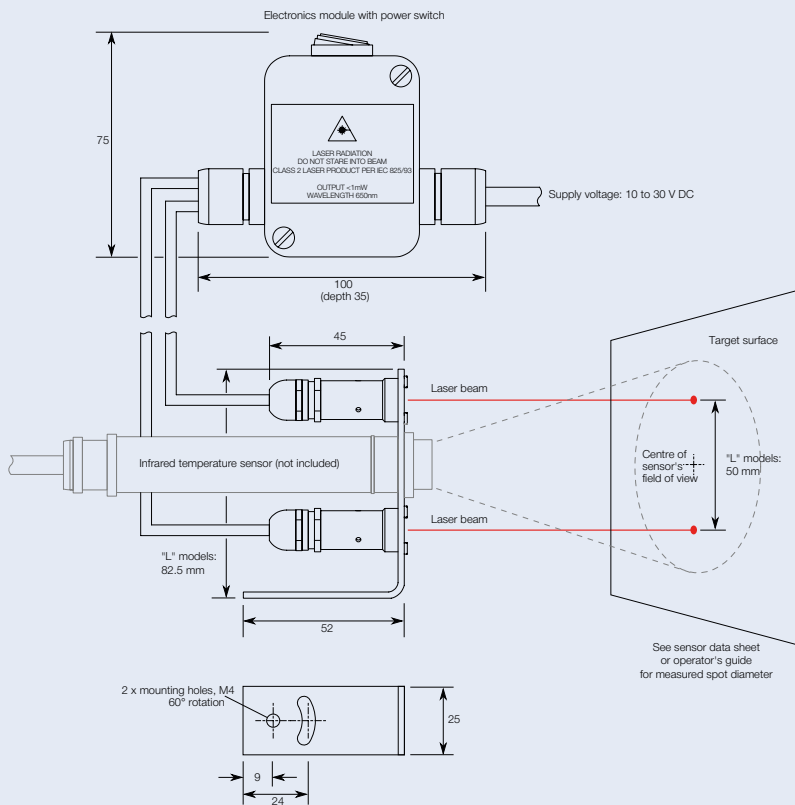

GENERAL SPECIFICATIONS

Supply voltage

10 to 30 V DC

Max current draw

100 mA

Electrical connection

Removable screw terminals

Power cable type

Use two-core cable with outer diameter 4.5 to 10 mm

Connection cable (lasers to electronics module)

Two cables, length 1 m as standard (longer cable available to order)

Construction

Bracket & laser housing: Stainless steel
Electronics module: Polycarbonate

Separation of laser dots

42 mm (calibrated at 1.5 m distance)

Dimensions (electronics module)

With glands & switch:

100 (w) x 75 (h) x 35 (d) mm

Box only: 50 (w) x 65 (h) x 35 (d) mm

Dimensions (bracket)

25 (w) x 74 (h) x 52 (d) mm

Weight (without sensor)

202 g

Environmental Rating

IP65

Relative humidity

95% max. non-condensing

Operating temperature range

-10°C to +60°C

OPTIONS

- Extended cable for all models (30 m max)

ORDERING INFORMATION


| Description | Compatibility | Type | Model number |
|-----------------------------|--|------------------------------|--------------|
| Dual Laser Sighting Bracket | Sensors with 16 mm mounting thread (e.g. PyroCouple, PyroMini, PyroBus, PyroEpsilon) | Fixed (1-axis rotation) | DLSBFS |
| | | Adjustable (2-axis rotation) | DLSBAS |
| | Sensors with 20 mm mounting thread (e.g. PyroUSB) | Fixed (1-axis rotation) | DLSBFL |
| | | Adjustable (2-axis rotation) | DLSBAL |

Multi-Channel Infrared Temperature Monitoring System



- Miniature non-contact temperature sensors with RS485 Modbus communications
- Touch screen terminal for configuration, display, alarms and data logging
- Low-cost standalone 6-channel system
- Build larger systems using the PM180's separate Modbus Master and Slave interfaces
- Analogue and alarm relay outputs via optional modules
- Conforms to industrial EMC standards

PM180 AS MODBUS MASTER

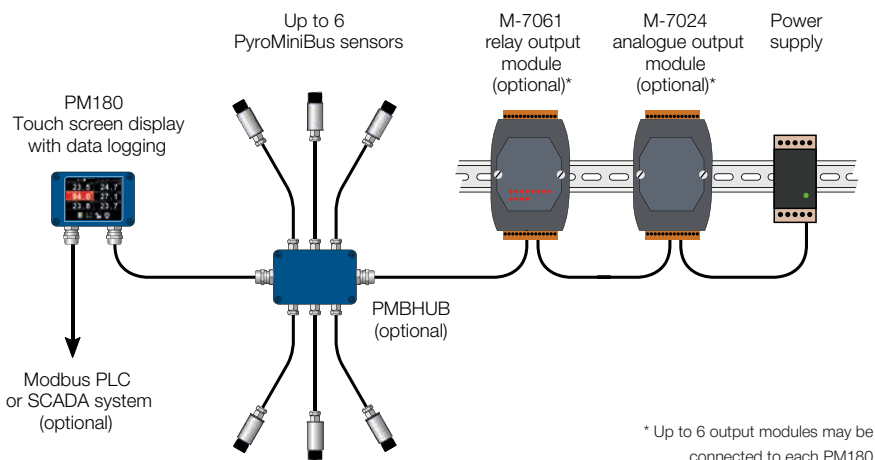

The PyroMiniBus is an industrial infrared temperature monitoring system, with miniature sensing heads and optional display modules. PyroMiniBus sensors are designed to measure the surface temperature of non-reflective materials in industrial applications, from -20°C to 1000°C. They are sealed to IP65, built from 316 stainless steel, and fully tested to industrial EMC standards. They can measure food, paper, thick plastics, asphalt, paint, bulk materials and organic materials, as well as most dirty, rusty or oily surfaces.

ROBUST

PyroMiniBus sensors have an operating temperature rating of up to 120°C with no need for cooling (70°C on XCF models).

COMPACT

The sensors measure just 45 mm long (plus cable gland), so they can fit into the smallest of spaces.

CONFIGURABLE

Up to 6 sensors can be connected to the optional PM180 interface module, which provides temperature display, configuration, and high-capacity data logging to a MicroSD Card. Analogue and relay outputs are available via separate DIN rail mounted modules.


LOW COST

With up to 6 sensors connected to one PM180, the PyroMiniBus is an ideal low-cost non-contact temperature measurement system.

NETWORKABLE

To measure more than 6 locations, PyroMiniBus sensors and PM180 sub-networks may be connected to an RS485 Modbus SCADA system or PLC. It is possible to measure the temperature of hundreds or thousands of locations on the same network.

PM180 AS MODBUS SLAVE

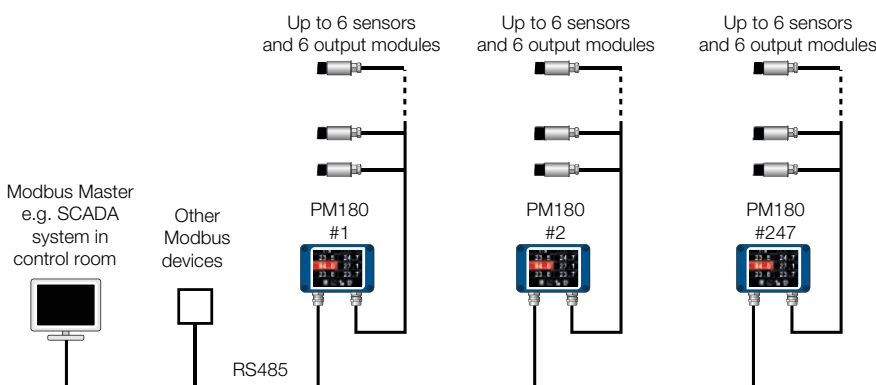


Each PM180 is a slave device on the main network and the master on each network of sensors.

PM180 6-CHANNEL TOUCH SCREEN TERMINAL




- Configure, display and log data and alarms from up to 6 sensors per terminal unit, simultaneously or individually
- Operates as Modbus master and Modbus slave
- High capacity data logging to MicroSD Card
- Bright touch screen with backlight
- Analogue and relay outputs via optional ICP DAS modules
- 2-channel scrolling temperature chart

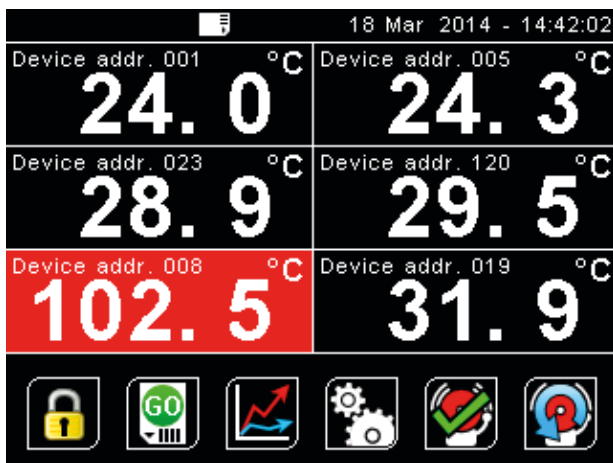

Intuitive touch screen interface

Display and configure all 6 channels individually or simultaneously. The display for each channel turns red in an alarm condition

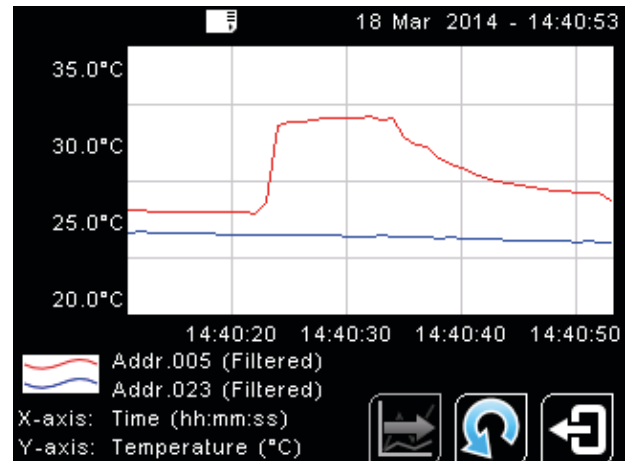


Temperature chart

Display temperature data from two channels in a scrolling graph



Password-protected settings

Configure options for each sensor and the PM180 itself via the touch screen interface

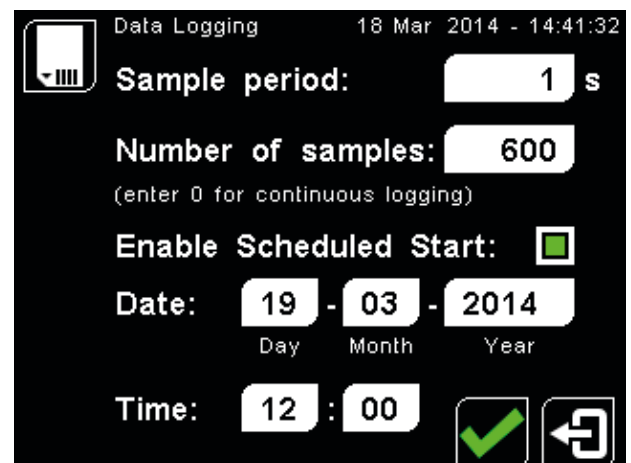

Data logging

Schedule a start time, or start and stop logging at the touch of an icon. Temperature data and alarm events may be logged to a MicroSD Card (not supplied)

SPECIFICATIONS



PYROMINIBUS SENSOR SPECIFICATIONS


| General | |
|---------------------------|---|
| Temperature Range | -20°C to 1000°C |
| Interface | RS485 Modbus RTU |
| Accuracy | ±1% of reading or ±1°C whichever is greater |
| Repeatability | ± 0.5% of reading or ± 0.5°C whichever is greater |
| Emissivity Setting | 0.2 to 1.0 |
| Response Time, t90 | 125 ms (90% response) |
| Spectral Range | 8 to 14 µm |
| Supply Voltage | 6 to 28 V DC |
| Supply Current | 50 mA max. |
| Baud Rate | 9600 baud * |
| Format | 8 data bits, no parity, 1 stop bit * |

* Other configurations available upon request

| Configuration | |
|---------------------------------|--|
| Configuration Method | Via PM180 touch screen, or directly via RS485 Modbus |
| Configurable Parameters | Emissivity Setting, Averaging, Reflected Energy Compensation |
| Mechanical | |
| Construction | Stainless Steel |
| Dimensions | 18 mm diameter x 45 mm long |
| Thread Mounting | M16 x 1 mm pitch |
| Cable Length | 1m (longer lengths available to order) |
| Weight with Cable | 85 g |
| Environmental | |
| Environmental Rating | IP65 |
| Ambient Temperature | 0°C to 120°C (70°C on XCF models) |
| Relative Humidity | 95% max. non-condensing |
| Conformity | |
| See PM180 Specification (right) | |

OPTICS





Diameter of target spot measured versus distance from sensing head (90% energy)

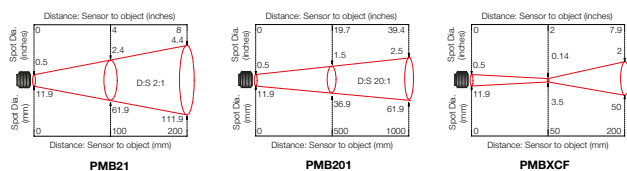

PM180 SPECIFICATIONS

| General | |
|--|---|
| Compatible Sensor Types | All models of PyroMiniBus and PyroBus sensors -BB and -BRT models of PyroMini and FibreMini sensors |
| Display | 2.83" (72 mm) resistive touch TFT, 320 x 240 pixels, backlit |
| Supply Voltage | 10 to 30 V DC |
| Maximum Current Draw | 100 mA |
| Configurable Parameters (global) | Temperature units, date and time, data logging, graph channels, alarm logging |
| Configurable Parameters (per channel) | Signal processing, emissivity setting, reflected energy compensation, alarms, Modbus address |
| Alarm Configuration | 12 alarms (2 per sensor) with adjustable level, individually configurable as HI or LO. |
| Temperature Units | °C or °F selectable |
| Temperature Resolution | 0.1° |
| Signal Processing | Averaging with configurable period |
| Display Sample Period | 120 ms per sensor (720 ms in total for 6 sensors) |
| Data Logging | |
| Logging Interval | 1 to 86,400 seconds (1 day) |
| MicroSD Card | Max. capacity: 32 GB (not included - stores years of logged data) |
| Internal Clock Battery | 1 x BR 1225 3V (not included) |
| Variables Logged | Target temperature, sensing head temperature, alarm events |
| File Format | .csv (can be imported to Excel) |
| Configurable Parameters | Sample period, number of samples, scheduled start date and time |
| Mechanical | |
| Construction | Die Cast Aluminium |
| Electrical Connections | Removable screw terminals, 28 AWG to 18 AWG |
| Dimensions | 98(w) x 64(h) x 36(d) mm excluding cable glands |
| Weight | 280 g |
| Environmental | |
| Environmental Rating | IP65 |
| Ambient Temperature | 0°C to 60°C |
| Relative Humidity | Maximum 95%, non-condensing |
| Conformity | |
| RoHS Compliant | Yes |
| Electromagnetic Compatibility | EN61326-1, EN61326-2-3 (Electrical Equipment for Measurement, Control and Laboratory Use - EMC Requirements - Industrial) |



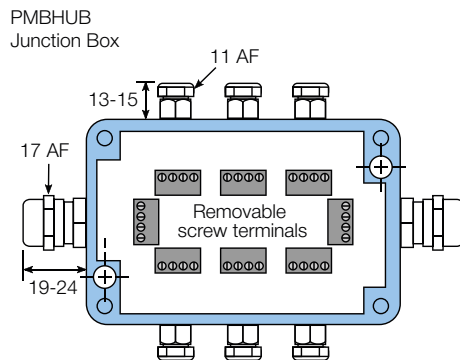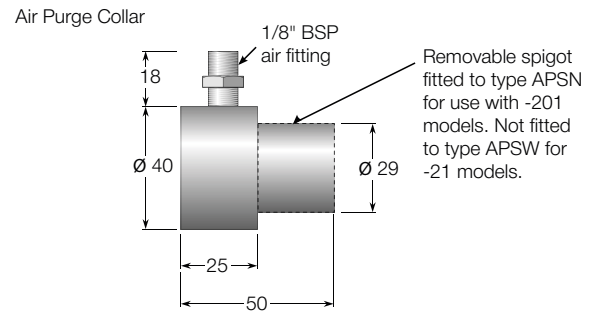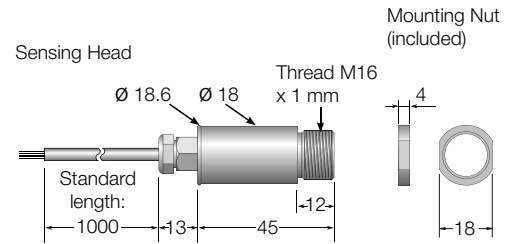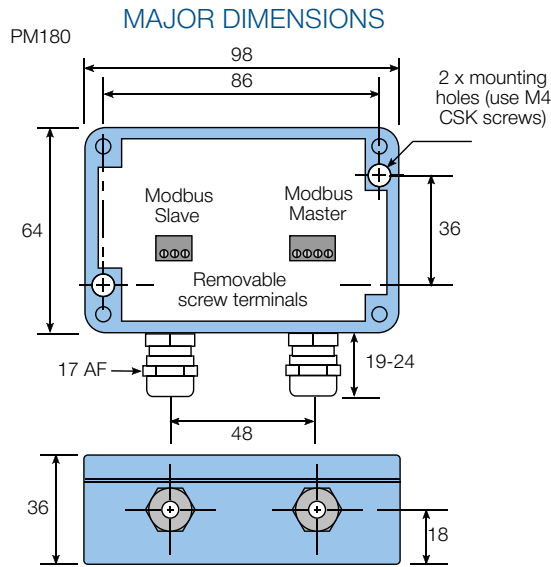

PMBHUB SPECIFICATIONS

Construction

Die Cast Aluminium

Electrical Connections

Removable screw terminals, 28 AWG to 18 AWG

Weight

250 g

Environmental Rating


IP65

Enclosure Dimensions

Same as PM180

All dimensions in mm

MODEL NUMBERS

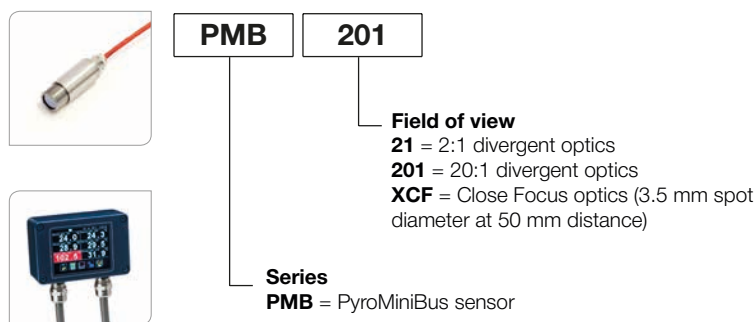

SENSOR ACCESSORIES

IP65 junction box for 6 sensors **PMBHUB**

Adjustable mounting bracket **ABS**

Fixed mounting bracket **FBS**

Extended cable for PyroMiniBus sensor **PMBCE**

RS485 network cable **PMBSC**

Calibration certificate **CALCERTA**

Laser sighting tool **LSTS**

Fixed or Adjustable mounting bracket with continuous laser sighting **DLSBFS / DLSBAS**

Panel Mounting Kit **PMK**

PM180 ACCESSORIES

International AC mains power supply for PM180
PM180MA

MicroSD Card for PM180 data logging MSD

12-channel Modbus relay output module M-7061

4-channel Modbus voltage or current analogue output module M-7024



PM7P and PM10P

Industrial Panel PCs



- Touch screen, panel mounted industrial PCs with Windows 7 and CalexSoft 2 multi-channel software
- Resistive touch screen can be used with gloves on
- USB and RS485 ports for connection to infrared temperature sensors
- Access temperature data via Ethernet or RS232, or save it to a USB drive via the front USB port
- Built-in UPS automatically saves data and shuts down the operating system if power is lost
- Robust solid-state hard drive
- Fanless design with aluminium housing for effective heat dissipation

The PM7P and PM10P panel PCs are ideal for use with systems of multiple infrared temperature sensors. They are supplied pre-installed with CalexSoft 2 multi-channel software.

| General specifications | | PM7P | PM10P |
|-----------------------------|---|------|---|
| Power supply | 24 V DC \pm 10% | | |
| Consumption | Approx. 12W | | 18 W |
| Display | 7" 800x600 resistive touch screen, LED backlight | | 10.4" 800x600 resistive touch screen; LED backlight |
| Operating conditions | Temperature 5-50°C, humidity 10-90% RH (non condensing) | | |
| Frontal panel | 6mm aluminium alloy, milled | | |
| Weight | Approx. 2 kg | | Approx. 3 kg |
| Sealing | Front panel: IP65, enclosure and terminal blocks: IP20 | | |
| Cooling | Fanless | | |
| UPS | Integrated, assisted shut-down | | |
| Hardware features | | PM7P | PM10P |
| CPU | Intel® Celeron® J1900 Quad Core @2.0GHz, 2MB Cache | | |
| RAM | 2GB DDR3 SDRAM | | |
| Hard Disk | SATA Solid State Disk (SSD) 2,5" 24h/24h Anti shock 32GB | | SATA Solid State Disk (SSD) 2,5" 24h/24h Anti shock 64 GB |
| Ethernet | 1 x LAN 10/100 Base-TX Ethernet RJ-45 interface | | 2 x LAN 10/100/1000 Base-TX Ethernet RJ-45 interface |
| Serial Interfaces | 1 x RS232, 1 x RS485 Optoisolated from power supply | | 1 X RS232, 1 X RS485 Optoisolated from power supply |
| USB ports | 1 Front + 2 Rear, USB 2.0 | | |
| Audio | 1 Mono 1W Out or 1 Stereo 500 Ohm Out | | 1 Stereo Output 600 Ohm |
| Clock | Real-Time clock, Back-up battery | | |
| Software features | | PM7P | PM10P |
| Operating system | Windows® 7 Embedded | | |
| Software provided | CalexSoft 2 multi-channel software for Calex infrared temperature sensors, with: Data logging to Excel compatible file Remote communications with other CalexSoft 2 terminals via Modbus TCP (over Ethernet) Sensor connectivity via RS485 and USB Fully customisable temperature displays and graphs | | |

| Dimensions (mm) | | | | | |
|-----------------|-----|-----|----|-------------|-------------|
| Model | L | H | W | L (cut out) | H (cut out) |
| TD750 | 204 | 160 | 34 | 181 | 145 |
| TD850-A | 325 | 260 | 26 | 302 | 242 |

| Ordering | |
|--------------|---------------------------------|
| PM7P | 7" panel PC with CalexSoft 2 |
| PM10P | 10.6" panel PC with CalexSoft 2 |

Temperature Measurement Software

CalexSoft 2

Multi-channel software



- Read temperatures from multiple sensors
- View scrolling temperature graphs
- Customisable layout with multiple pages and simple, touch-friendly drag-and-drop interface
- Arrange sensors in colour-coded groups and see the average temperature for the group
- Alarms, configurable per sensor
- Data logging to comma-separated text file (compatible with Excel), with the option to enter batch names
- Remote communications via Modbus TCP
- View temperatures remotely on another instance of CalexSoft 2
- Usernames and optional passwords with 2 permission levels (operator and admin)


Compatible with (USB) PyroMiniUSB, PyroUSB, ExTemp* (via LCT)

Compatible with (RS485) PyroMiniBus, PyroBus, PM180 (read only), FibreMini (-BRT), PyroMini (-BB and -BRT)

System requirements Desktop PC or Panel PC with Windows 7 or newer (32 or 64 bit), 800x600 minimum screen resolution, touch screen or mouse and keyboard

CalexConfig

Simple, touch-friendly software for one sensor

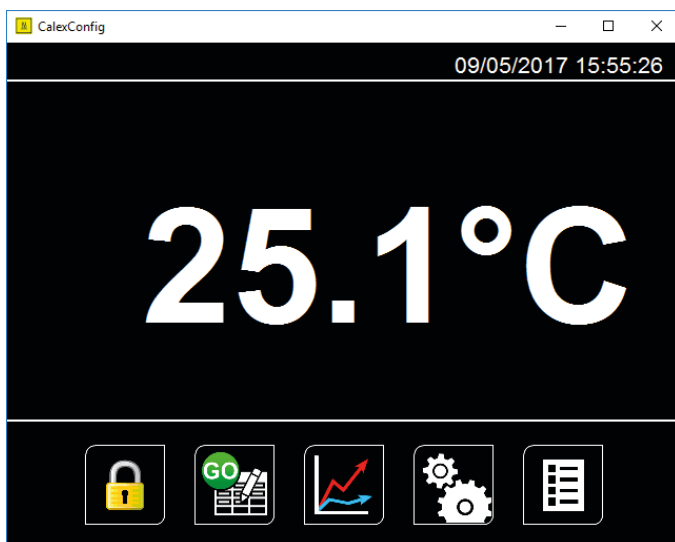

- Read the measured temperature
- Configure the sensor
- View a scrolling temperature graph
- Log data to a comma-separated text file (compatible with Excel)

Compatible with (USB) PyroMiniUSB, PyroUSB, ExTemp* (via LCT)

Compatible with (RS485) PyroBus, PyroMiniBus, FibreMini (-BRT), PyroMini (-BB and -BRT)

System requirements Desktop PC or Panel PC with Windows 7 or newer (32 or 64 bit), 800x600 minimum screen resolution, touch screen or mouse and keyboard

* When used with the ExTemp, the software is designed for configuration of the sensor. For continuous temperature measurement, use the 4-20 mA output.

ORDERING


CalexConfig and CalexSoft 2 are available to download free of charge from www.calex.co.uk.

Remote Sensor Telemetry System



- Monitor temperatures from anywhere in the world
- Unit transmits measurement data to the internet via cell phone network
- Up to 4 sensor inputs per unit
- View, analyse and download data via the hosted web interface

SYSTEM DIAGRAM

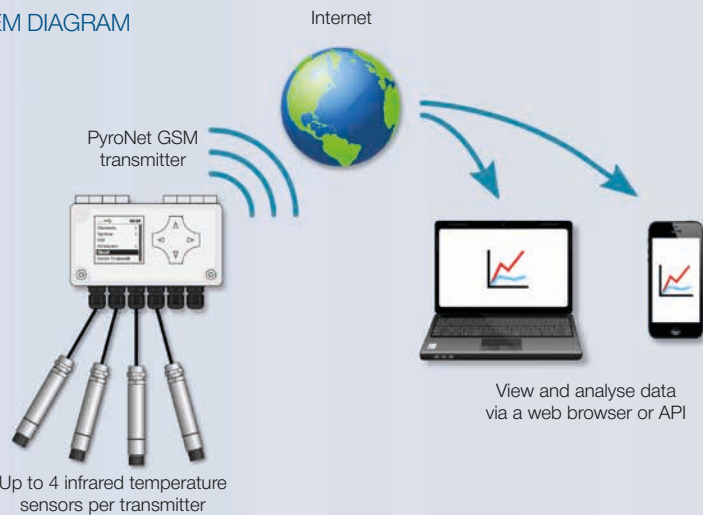

The PyroNet GSM telemetry module transmits readings from up to 4 devices with analogue output, such as the PyroCouple and PyroMini infrared temperature sensors.

Measurements are taken at regular intervals and transmitted to the internet via the GSM cellular phone network, using the PyroNet GSM's built-in SIM card.

Our hosted web interface, PyroNet GSMView, allows you to access and analyse data anywhere in the world via the internet.

A choice of battery-powered, solar-powered or 6-24 V DC-powered versions is available for indoor or outdoor use - contact Calex for advice.

Optional relay outputs rated 30 V DC, 2 A are available for connection directly to alarm hardware.


PyroNet GSMView

- View and export data via a web browser
- Configure the PyroNet GSM unit remotely
- API included for third-party data export
- See configurable graphs
- Send alarms via email

PyroNet GSMView is a web-based interface for data acquisition and analysis. Your data is hosted securely on the PyroNet GSMView servers and access is included as standard in your monthly subscription.

You can export measurement data to be used in a spreadsheet, and configure the system to send email or SMS alarms, for temperature alerts or loss of communication (for example, due to power failure).


Logged in as Demo | [Log out](#) | [My account](#)



PyroNet GSMView

Dashboard | **Devices**

Readings for Turbine 1 Main Bearing

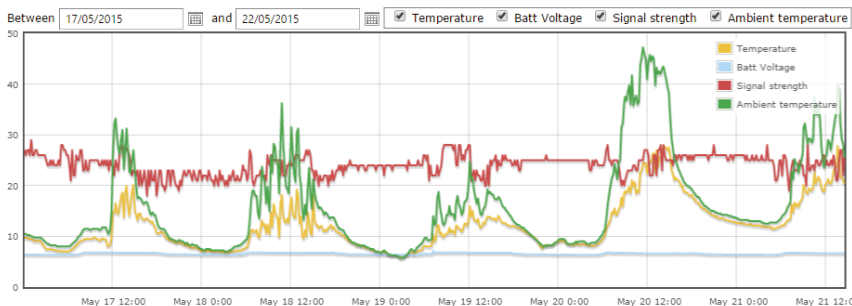

| Date Recorded Utc | Temperature (Deg C) | Batt Voltage (Volts) | Signal strength | Ambient temperature (°C) |
|---------------------|---------------------|----------------------|-----------------|--------------------------|
| 22/05/2015 14:31:32 | 20.39 | 6.68 | 26 | 25.5 |
| 22/05/2015 14:20:31 | 21.12 | 6.68 | 22 | 28.25 |
| 22/05/2015 14:09:31 | 21.63 | 6.67 | 27 | 29.25 |
| 22/05/2015 13:58:26 | 21.71 | 6.67 | 27 | 32.25 |
| 22/05/2015 13:47:26 | 26.4 | 6.66 | 25 | 39.25 |
| 22/05/2015 13:36:31 | 27.82 | 6.67 | 21 | 40 |



GENERAL SPECIFICATIONS

Inputs

4 x analogue inputs, selectable 0-20 mA, 4-20 mA, 0-5 V, 0-10 V or digital ON/OFF

Optional plug-in board with 5 x digital or pulse inputs - contact Caalex.

Compatible with

PyroCouple, PyroMini, PyroUSB, or any other sensor with analogue voltage or current output

Input resolution

10 bit (1024 increments) over 10 volts

Accuracy

0.25%

Sample rate

Configurable depending on data subscription (typically 1 transmission per 10 minutes, or 1 transmission per hour)

Outputs

-R models: 2 relay outputs rated 30 V DC, 2 A

Display

40 x 40 mm, 128 x 128 pixel resolution, backlit

Programming interface

USB port for configuration and firmware updates

Firmware updates

Via USB or GSM network

Warranty

2 years

ELECTRICAL

Input connector

Removable screw terminals, pitch 3.81 mm. 4 x 3-pin connectors for sensors, 1 x 2-pin connector for power

Power supply

3.9 V battery (-B models) or 6-24 V DC, 0.5 A (-DC models)

Output power to sensors

3.9 V (unregulated), 5 V or 21.6 V

Output current to sensors

31.25 mA max.

ENVIRONMENTAL

Environmental rating

IP67

Dimensions

138 x 76 x 68 mm (excluding cable glands)

TELECOMMUNICATIONS

Approvals & Conformity

Conforms with R&TTE Directive; GE, GCF, FCC, PTCRB, IC, ANATEL approved

Modem type

Quad-band GSM & GPRS 850/900/1800/1900 Mhz

Output power




Class 4 (2 W) 850/900 MHz

Class 1 (1 W) 1800/1900 MHz

Antenna


Internal antenna built in as standard. Optional external antenna via SMA connector

DIMENSIONS (mm)



ORDERING

PyroNet GSM telemetry transmitter with 4 analogue inputs, IP67 weatherproof enclosure, built-in display, GSM modem for GPRS or SMS communications and internal antenna



PGSM - XX - X

Relay Outputs
(blank) = No relay outputs
R = 2 relay outputs rated 30 V DC, 2 A

Power Supply

DC = 6-24 V DC
B = Internal 3.9 V battery
S = Solar panel, backup battery and regulator

OPTIONS AND ACCESSORIES

PGANT External antenna with connection kit

PGBAT Battery, 3.9 V, 16 Ah, non-rechargeable, with built-in secondary cell. For PGSM-B models.

Monthly Subscriptions

Subscriptions include a SIM card, access to PyroNet GSMView, and a daily allowance of 24 transmissions (1 per hour) or 144 transmissions (1 every 10 minutes) as standard. Other options are available.

Optionally, alarm events may be transmitted by SMS and email.

Contact Caalex to discuss your requirements.

Low Cost Handheld Infrared Thermometer



- Wide temperature range
- Built-in laser pointer to improve aim
- Narrow field of view
- Input for type K thermocouple (ST642)
- Adjustable emissivity (ST642)
- Adjustable high and low alarms, audible and visual
- Backlit display with Data Hold
- °C/°F switchable
- Fast sampling time
- Auto-hold and power off
- High quality construction


GENERAL SPECIFICATIONS

| | |
|--------------------------|---|
| Field-of-view | 12:1 |
| Temperature Range | -32°C to 535°C (-25°F to 999°F) |
| Accuracy* | ±3°C (±5°F) from -32°C to -20°C (-25°F to -4°F) ±2°C (±3°F) from -20°C to 100°C (-4°F to 212°F) ±2% above 100°C (212°F) |
| Spectral Range | 5 to 14µm |
| Repeatability | ±1°C (±2°F) |
| Resolution | 0.1°C (0.1°F) |
| Response Time | 500ms |
| Ambient Range | 0°C to 50°C (32°F to 122°F), 10% to 90%RH |
| Power OFF | Automatic after approx. 7s |
| Display | LCD with backlighting |
| Battery Type | 9V, PP3 |
| Dimensions | 180mm x 130mm x 40mm |
| Weight | 195g |

*Accuracy is given at ambient temperature of 25°C (77°F)

| | ST640 | ST642 |
|------------------------------|---------------|-----------------------|
| Emissivity | Fixed at 0.95 | Adjustable 0.1 to 1.0 |
| Type K Thermocouple Input | NO | YES |
| eSmart Emissivity Correction | NO | YES |
| Audible Alarm | YES | YES |
| CIS Visual Alarm | YES | YES |
| °C/°F Switchable | YES | YES |
| Backlight | YES | YES |
| Laser Sight Switchable | YES | YES |
| Max/Min/Avg/ΔT | YES | YES |
| Carrying case | YES | YES |

DISTANCE (D) TO SPOT SIZE (S)

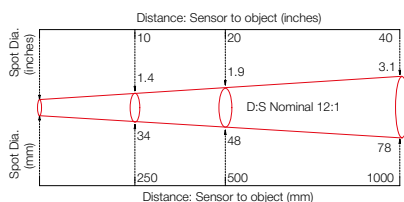

The ST640 Series is a range of low cost, handheld infrared thermometers with laser sighting and large backlit LCD displays.

Each unit measures from -32°C to 535°C with 0.1°C resolution. They also offer a superior 12:1 field of view, which helps to minimise errors by producing a small diameter measurement area.

The emissivity setting on the ST640 is fixed at 0.95, making it ideal for most organic materials and non-shiny (painted, corroded or anodised) metals. The emissivity setting on the ST642 is adjustable from 0.1 to 1.0 and can be set automatically by using the thermocouple input and eSmart feature.

Both models provide adjustable audible and visual alarms in which the colour of the display changes when the target temperature exceeds the alarm set point.

Readings can be taken in °C or °F, and when the trigger is released the last measurement is held for approximately 7 seconds before the unit automatically turns off.

ST640 series thermometers will operate in ambient temperatures from 0°C to 50°C and are powered by a standard PP3, 9V battery.

Each unit is supplied complete with a soft carrying case.

ST680 Series

Handheld Infrared Thermometer



- Wide temperature range, -50°C to 1000°C
- Narrow 50:1 field of view
- USB Data Output (ST689)
- Input for type K thermocouple (ST689)
- Built-in laser pointer to improve aim
- Adjustable emissivity
- Adjustable high and low alarms
- Backlit LCD display
- °C/°F switchable
- Fast sampling time
- Auto-hold and power off
- High quality construction

GENERAL SPECIFICATIONS

| | |
|--------------------------|---|
| Field-of-view | 50:1 |
| Temperature Range | -50°C to 1000°C (-58°F to 1832°F) |
| Accuracy* | ±3°C (±5°F) from -50°C to -20°C (-58°F to -4°F) ±2°C (±3°F) from -20°C to 100°C (-4°F to 212°F) ±2% above 100°C (212°F) |
| Spectral Range | 8 to 14µm |
| Repeatability | ±1°C (±2°F) |
| Resolution | 0.1°C (0.1°F) |
| Response Time | 500ms |
| Ambient Range | 0°C to 50°C (32°F to 122°F), 10% to 90%RH |
| Power OFF | Automatic after approx. 6s |
| Display | 4-digit LCD with backlighting |
| Battery Type | 9V, PP3 |
| Dimensions | 200mm x 127mm x 47mm |
| Weight | 330g |

*Accuracy is given at ambient temperature of 25°C (77°F)

| | ST688 | ST689 |
|---------------------------|-----------------------|-----------------------|
| Emissivity | Adjustable 0.1 to 1.0 | Adjustable 0.1 to 1.0 |
| Type K Thermocouple Input | NO | YES |
| USB Data Output | NO | YES |
| 10 point memory | YES | YES |
| Audible Alarm | YES | YES |
| °C/°F Switchable | YES | YES |
| Backlight | YES | YES |
| Laser Sight Switchable | YES | YES |
| Max/Min/Avg/ΔT | YES | YES |
| Carrying case | YES | YES |

The ST680 Series is a range of high quality, handheld infrared thermometers with laser sighting and large backlit LCD displays.

Each unit measures from -50°C to 1000°C with 0.1°C resolution. They also offer a superior 50:1 field of view, which helps to minimise errors by producing a small diameter measurement area.

Model ST689 has a USB data output.


The emissivity setting is adjustable from 0.1 to 1.0 and both models provide adjustable audible alarms.

Readings can be taken in °C or °F, and when the trigger is released the last measurement is held for approximately 6 seconds before the unit automatically turns off.

ST680 series thermometers will operate in ambient temperatures from 0°C to 50°C and are powered by a standard PP3, 9V battery.

Each unit is supplied complete with a soft carrying case.

DISTANCE (D) TO SPOT SIZE (S)

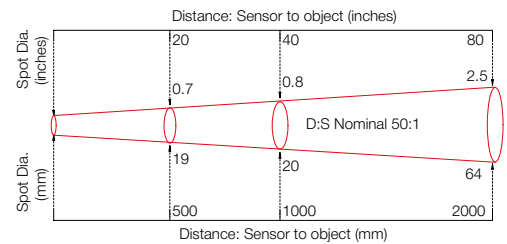



- Universal analogue input
- Relay outputs
- SSR output
- Analogue voltage or current output for control, retransmission, or emissivity adjustment on PyroEpsilon sensor
- Universal supply voltage 24 to 230 V AC/DC
- Remote control via RS485 Modbus
- Ideal as a signal converter

GENERAL SPECIFICATIONS

| | |
|-----------------------------|---|
| Housing | DIN 43880 for mounting on type EN 50022 rail or on a flat surface |
| Supply Voltage | 24 to 230VAC/DC +/- 15% 50/60Hz |
| Power Consumption | 3W |
| Display | 4-digit dual LED, 8 red status LEDs |
| Operating Conditions | 0-45°C, 35-95%RH |
| Inputs | 1 configurable for J, K, R or S thermocouples; Pt100; Ni100; Pt1000; Pt500; PTC1k; NTC10k; 0 to 10V; 0/4 to 20mA; 0 to 40mV; potentiometer 6kΩ / 150kΩ; TA 50mA. |
| Outputs | 2 relays 5A resistive + 1 logic SSR 12V-30mA / 4 to 20mA / 0 to 10V for control or retransmission, galvanically isolated from input and power supply RS485 Modbus RTU (57600 baud max) Input TA 50mA for Loop Break Alarm |
| Digital Input | Tuning start, Setpoint change, Man/Auto selection, Hold function, Start/Stop preprogrammed cycle |
| Control Modes | ON/OFF, P, PI, PID, Autotuning |
| Accuracy | 0.5%±1digit for TC/RTD; 0.2%±1digit for V/mA |
| Sampling Time | Selectable (15ms max) |
| Sealing | IP20 |
| Configuration | Parameters protected by password; optional memory card with battery for repeat configurations; LabSoftView software for configuration via a PC |
| Optional Enclosure | Polycarbonate with transparent lid, IP65, 160H x 90W x 90D mm |

The DRR245 DIN-rail mounted controller provides a highly versatile alternative to panel-mounted instruments. It has one analogue input which is configurable for up to 18 different sensors/signals, two relay outputs, and a third output which can be configured either as a SSR logic signal or a 4 to 20mA / 0 to 10V analogue signal for control or re-scalable retransmission of the process variable or setpoint.

The analogue output can also be used to adjust the emissivity setting on a PyroEpsilon non-contact temperature sensor – the value is adjusted between 0.2 and 1.0 using the lower (red) LED display and associated push buttons.


The built-in switching power supply has an extended range of 24 to 230VAC/DC and does not require any jumper setting. The control modes are ON/OFF, PID + Autotuning and Heating/Cooling PID with a neutral zone.

Software features include launch tuning, setpoint selection via digital input, optional manual reset of the output via the front keypad, latch-on function for sensor calibration (including load cells) and a programmable cycle of 3 steps. RS485 serial communication (Modbus RTU) and load monitoring function (Loop Break Alarm) with current transformer TA are also provided.

There is an optional Memory Card to copy all of the configuration parameters from one controller to another without powering them up, whilst LabSoftView for Windows enables setting and monitoring of parameters on a PC.

The DRR245 is also available mounted in an IP65 enclosure with clear lid, which is ideal for mounting on a machine or close to the process where the operator can see the display.

If the DRR245 is ordered with a PyroEpsilon sensor, it is supplied pre-configured to display the 4 to 20mA signal from the sensor over the appropriate temperature range. It is also pre-configured to allow the emissivity setting on the sensor to be adjusted over the range 0.2 to 1.0. Since the PyroEpsilon derives its power from the DRR245 no other power source is required. The DRR245 can be supplied from a 24V to 230V source (+/-15%), AC or DC.

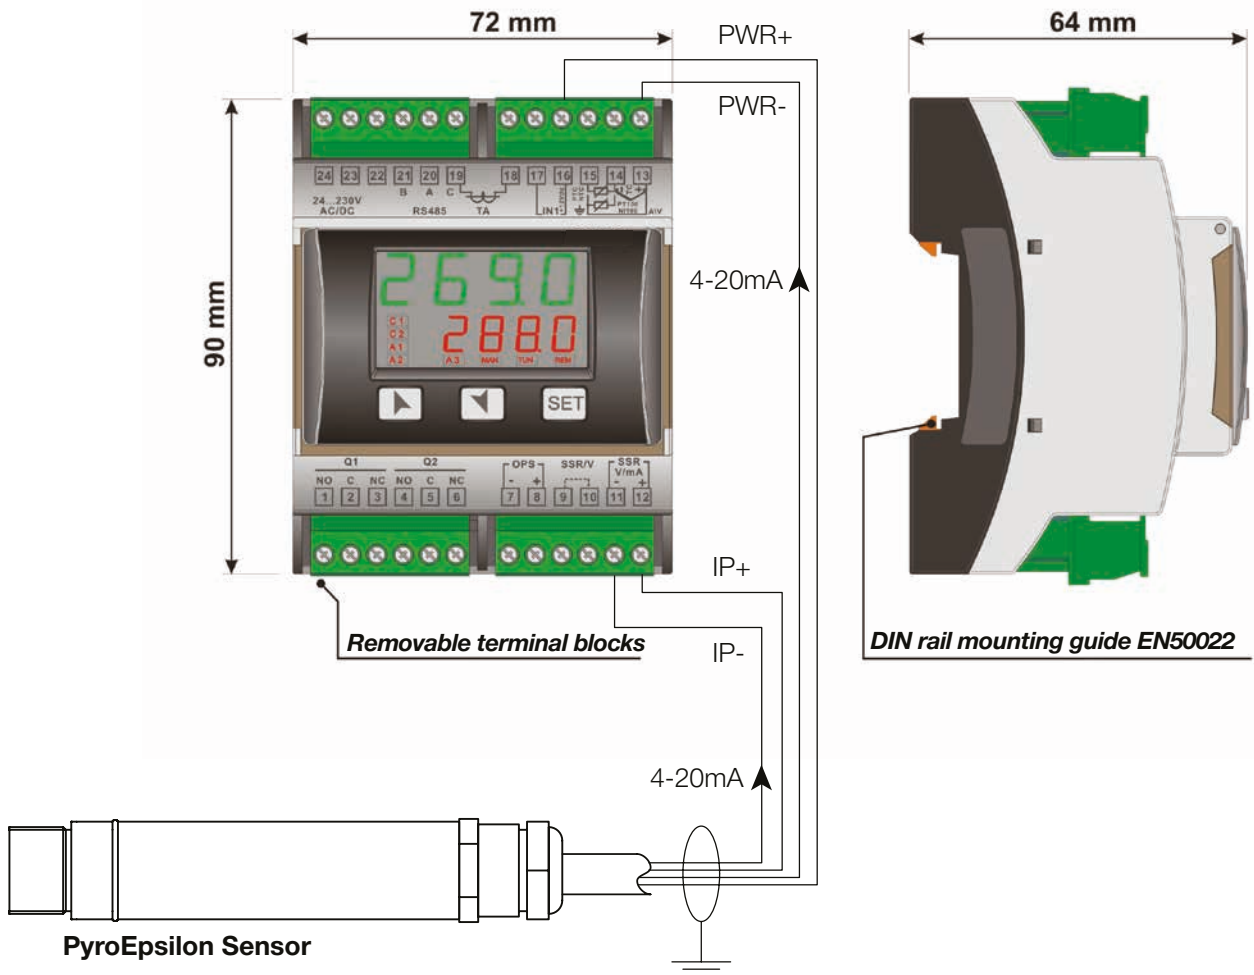

| MODEL | INPUTS | OUTPUTS | POWER SUPPLY |
|----------------|------------|--|---------------------------------|
| DRR245-21ABC-T | Selectable | 2Relays + SSR / 4..20mA / 0..10V + RS485 | 24...230V AC/DC +/- 15% 50/60Hz |



- Low-cost indicating PID controller
- Panel mount
- 2 setpoints
- Universal input
- Relay and SSR outputs
- Universal supply voltage


| General Specifications | |
|------------------------|---|
| Inputs | 1 input, configurable for J, K, R or S thermocouples; Pt100; Ni100; Pt500; Pt1000; PTC; NTC; 0/4 to 20mA; 0 to 10VDC; potentiometers <= 6kΩ or <= 150kΩ |
| Outputs | Control relay 8 A; Alarm relay 5 A; SSR Control/Alarm; Open/Close logic (time-proportioned), RS485 Modbus RTU Slave (-ADT models) |
| Control Action | ON/OFF; PID Autotuning; Heating/Cooling PID |
| Configuration | Via push-button controls, or memory card, or LABSOFTVIEW software. Parameters protected by password |
| Display | 3-digit red LED plus decimal point; green status LEDs |
| Accuracy | 0.5% ± 1 digit for TC/RTD; 0.2% ± 1 digit for mA/V |
| Sampling Time | 66 ms (selectable software filter on input and display) |
| Supply Voltage | 230 V AC or 12-24 V AC/DC (depending on model) |
| Power consumption | 2 W |
| Operating Temperature | 0°C to 40°C |
| Operating Humidity | 35% to 95% RH |
| Sealing | IP54 front panel (IP65 with gasket), IP30 housing, IP20 terminal blocks |
| Dimensions | 32H x 74W x 58D mm |
| Product Markings | CE, UL, RoHS Compliant |

The ATR121 is a dual-setpoint controller with a 3-digit red LED display. The input is configurable for thermocouples type J, K, S & R; Pt100; PTC1000; Ni100; NTC10k (typically used in the refrigeration industry); Pt500/Pt1000 (widely used in air-conditioning); 0 to 1V; 0 to 10V; 0 to 20mA and 4 to 20mA. Potentiometers with a full scale value of 6kΩ or 150kΩ may also be used and there is a "latch on" function for quick calibration and setting of minimum, maximum and zero via the front keys.




Two set-points are available, one for control and one for the alarm function. They can be configured to activate two relay outputs or an SSR output. The main relay for the control output is rated at 8A. The alarm relay is rated at 5A (alarm modes: threshold, band, deviation). Open/Close logic for motorised valves is also available.

Software features include ON/OFF control, PID + Autotuning and Heating-Cooling PID with a neutral zone. A single output (1 relay + SSR) version is also available.

Front of panel sealing to IP65 can be achieved using a gasket (optional). There is also an optional Memory Card to copy all of the configuration parameters from one controller to another without powering them up.

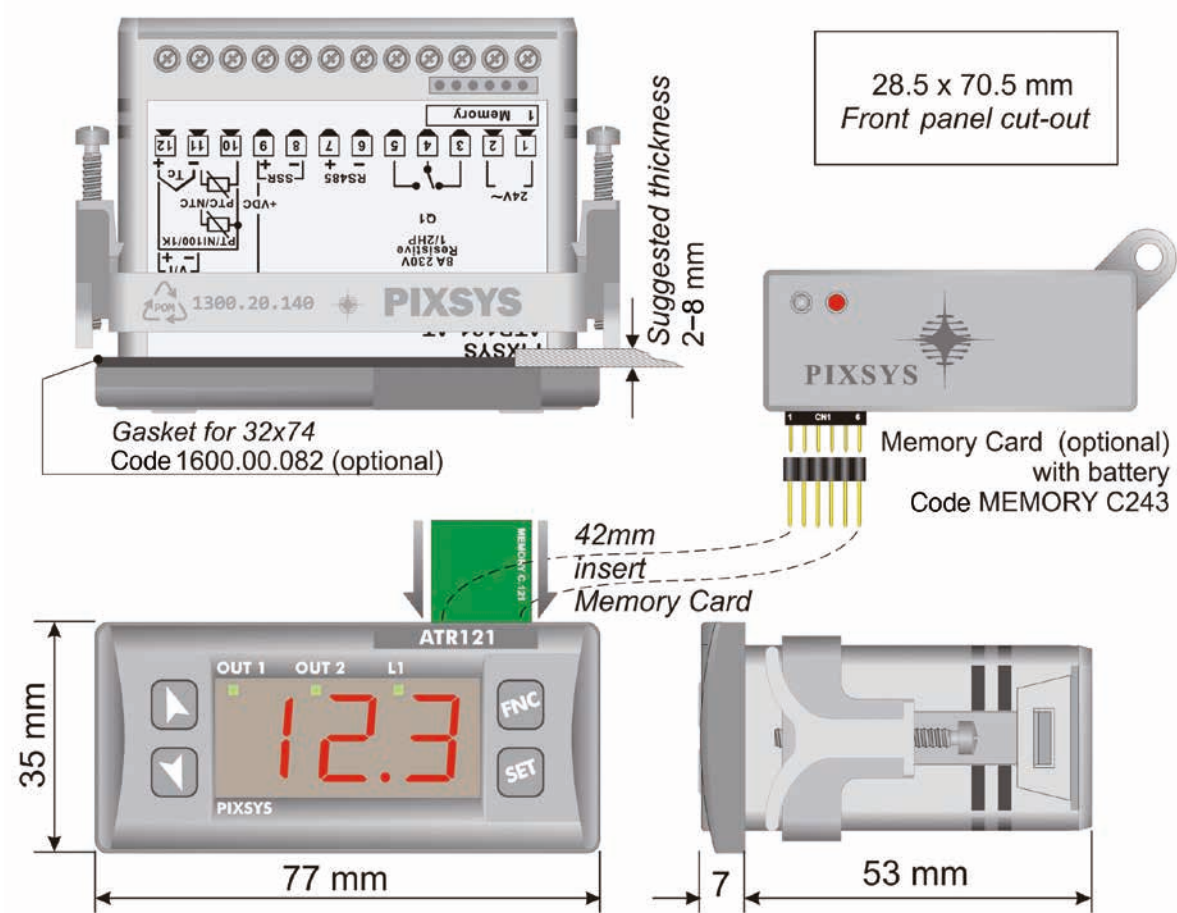

Model :

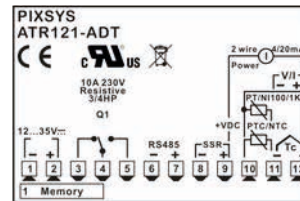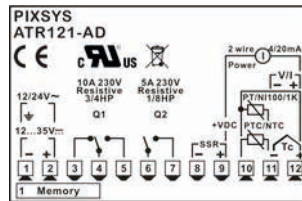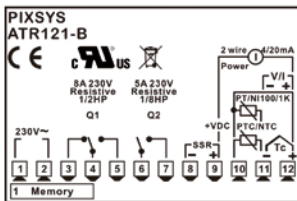

| Model | Inputs | Outputs | Supply Voltage |
|------------|----------------------|--|------------------------------|
| ATR121-AD | 1 configurable input | 2 Relays 8 A + 1 SSR | 12-24 V AC/DC (not isolated) |
| ATR121-B | 1 configurable input | 2 Relays 8 A + 1 SSR 12 V DC | 230 V AC (isolated) |
| ATR121-ADT | 1 configurable input | 1 Relay 8 A + 1 SSR 12 V DC + RS485 Modbus RTU Slave | 12-24 V AC/DC (not isolated) |

Controller/Indicator with Triple Setpoint



- Versatile indicating PID controller
- Panel mount
- 3 setpoints
- Universal input
- Relay and SSR outputs
- Optional Modbus communications
- Universal supply voltage

GENERAL SPECIFICATIONS

| | |
|-----------------------------|---|
| Dimensions | 32H x 74W x 58D mm |
| Supply Voltage | 24 to 230VAC/DC |
| Power Consumption | 2W |
| Display | 4-digit green + 4-digit red LED; 6 status LEDs |
| Operating Conditions | 0-40°C, 35-95%RH |
| Inputs | 1 configurable for J, K, R or S thermocouples; Pt100; Ni100; Pt500; Pt1000; PTC; NTC; 0/4 to 20mA; |
| Outputs | 0 to 10VDC; potentiometers <= 6kΩ or <= 150kΩ Control relay 8A; Alarm relay 5A; SSR Control/Alarm; Open/Close logic (time-proportioned); RS485 serial communication, MODBUS-RTU/Slave (version -T) |
| Control | ON/OFF; PID Autotuning; Heating/Cooling PID |
| Accuracy | 0.5%±1digit for TC/RTD; 0.2%±1digit for mA/V |
| Sampling Time | 15ms (selectable software filter on input and display) |
| Sealing | IP54 front panel (IP65 with gasket), IP30 housing, IP20 terminal blocks |
| Configuration | Parameters protected by password |
| Optional Functions | Timer ON/OFF; Pause/Continue Timer (assigned to alarm relay) |



This triple-setpoint controller has a dual red/green LED display which shows the process variable and setpoint value at the same time. The built-in switching power supply has an extended range of 24 to 230VAC/DC and does not require any jumper setting. The analogue input is selectable for thermocouples J, K, R & S; Pt100; PTC1000; Ni100; NTC10k (refrigeration industry); Pt500/Pt1000 (widely used in air-conditioning); 0 to 10V; 0 to 20mA and 4 to 20mA. Potentiometers with full scale up to 6kΩ and 150kΩ may also be used and there is a "latch on" function for quick calibration and setting of minimum, maximum and zero via the front keys.

Three setpoints are provided for control and/or alarm functions. They can be assigned to two relay outputs or an SSR output. The main control relay is rated at 8A. The alarm relay is rated at 5A (alarm modes: threshold, band, deviation). Open/Close logic for motorised valves is also available.



Software features include ON/OFF control, PID + Autotuning and Heating-Cooling PID with a neutral zone. A single output (1 relay + SSR) version is available with RS485 serial communication and Modbus-RTU/Slave protocol for supervisory systems.

Front of panel sealing to IP65 can be achieved using a gasket (optional). There is also an optional Memory Card to copy all of the configuration parameters from one controller to another without powering them up.

Software application LabSoftView for Windows enables setting and monitoring of parameters on a PC. A special software release which integrates both the basic control loop and the timer function is available upon request.

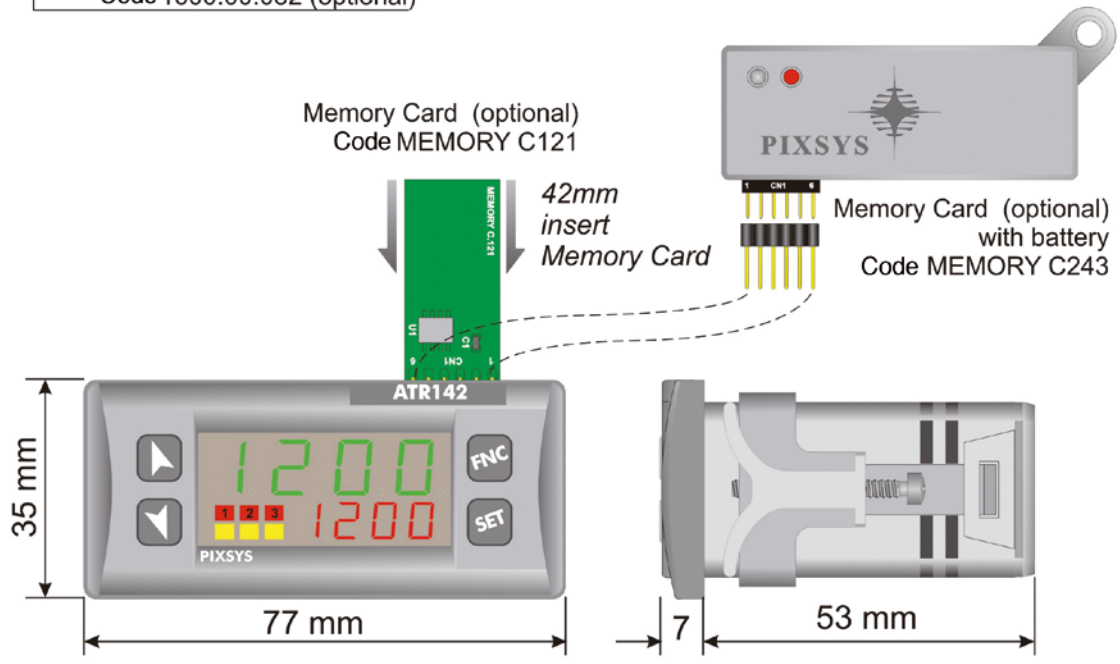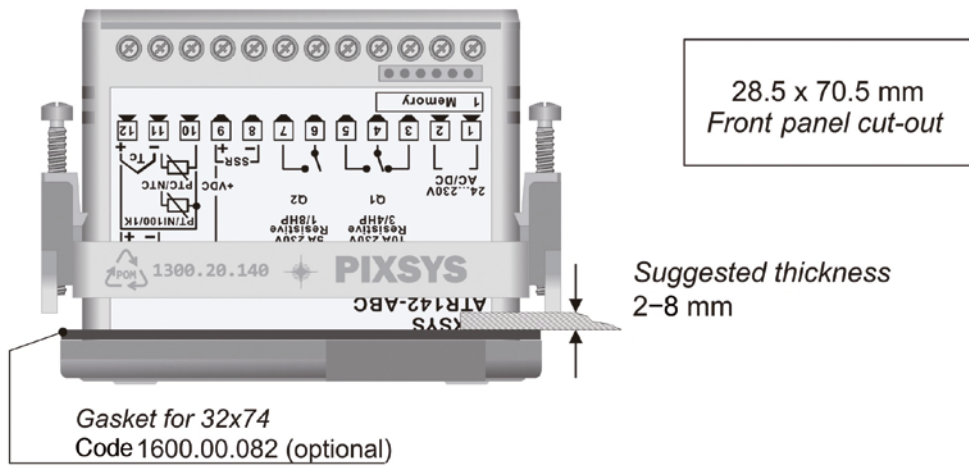

Model :

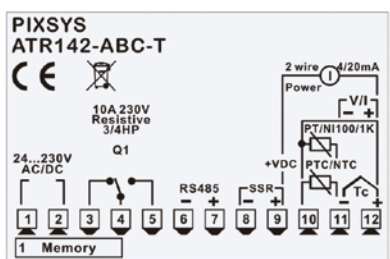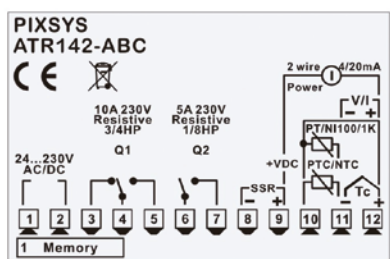

| MODEL | INPUTS | OUTPUTS | POWER SUPPLY |
|--------------|------------|-----------------------|------------------------------------|
| ATR142-ABC | Selectable | 2 Relays + SSR | 24...230V AC/DC +/- 15% 50/60Hz |
| ATR142-ABC-T | | 1 Relay + SSR + RS485 | |

PID Controller with NFC Configuration



- Compact indicating PID controller
- Super-bright LED display
- Configurable via NFC with Android app
- Universal input
- Relay and SSR outputs
- Optional Modbus communications
- Analogue outputs for control or retransmission
- Universal supply voltage
- Optional dual input

ATR244 is a multifunction PID controller with dual bright LED displays and optional dual input.






It is fully configurable via the built-in controls, Pixsys USB memory card, or via NFC with the MyPixsys app on Android. There is no need to connect power to the ATR244 when configuring it via NFC.

All models have a wide AC or DC supply voltage range, and a universal configurable input for all common signal types. Optional RS485 Modbus RTU communications allow remote monitoring.

Models with dual input allow two separate heating/cooling PID loops in the same device, and mathematical operations between two process values.

Outputs can be selected as control, alarm with multiple modes, or analogue retransmission.

| GENERAL SPECIFICATIONS | | | |
|---------------------------------|---|---------------------------------|---|
| Dimensions | 48H x 48W x 105D mm | | |
| Supply Voltage | 24 to 230VAC/DC +/- 15% 50/60Hz , galvanic isolation 2.5 kV | | |
| Power Consumption | 8W | | |
| Display | 2 x LED displays: 4-digit white and 4-digit red | | |
| Operating Conditions | 0-45°C, 35-95%RH | | |
| Inputs | <p>1 or 2 configurable analogue inputs selectable as:</p> <p>Thermocouple type K, S, R, J, T, N, B (with automatic cold junction compensation -25 to 85°C, ±0.2% of full scale ±1 digit, 16 bit resolution)</p> <p>Pt100, Pt500, Pt1000, Ni100, PTC1K, NTC10K (β 3435K)</p> <p>Linear analogue signals 0 to 10 V (50000 points), 0/4 to 20 mA (40000 points), 0 to 60 mV (25000 points)</p> <p>Potentiometer 1 to 150 kΩ (50000 points)</p> <table border="1"> <tr> <td>Sampling time (analogue inputs)</td> <td>Programmable from 2.1 ms (frequency up to 470 Hz)</td> </tr> </table> <p>2 or 4 digital inputs</p> <p>Configurable for setpoint change, hold, run, tuning launch, start / stop, lock configuration</p> <p>1 current transformer (CT) input:</p> <p>50 mA, 800 μs - 4096 points</p> | Sampling time (analogue inputs) | Programmable from 2.1 ms (frequency up to 470 Hz) |
| Sampling time (analogue inputs) | Programmable from 2.1 ms (frequency up to 470 Hz) | | |
| Outputs | <p>2 or 3 relays:</p> <p>250 V AC, 5 A, resistive change</p> <p>2 SSR outputs:</p> <p>12 / 24 V DC, 30 mA max</p> <p>1 or 2 analogue outputs:</p> <p>Selectable 4 to 20 mA (40000 points ± 0.2% full scale) or 0 to 10 V DC (40000 points ± 0.2% F.S.) for command or retransmission PV / SPV</p> <p>Serial communications (-T models):</p> <p>RS485 Modbus RTU Slave (4800 to 115200 baud)</p> | | |
| Control Modes | ON/OFF with hysteresis, P, PI, PID, PD time proportional, manual or auto tuning | | |
| Alarm Modes | Absolute / Threshold, Band, High / Low deviation. Alarm with optional Manual reset. Loop Break Alarm | | |
| Sealing | IP54 front panel (IP65 with gasket), IP20 (housing and terminal blocks) | | |
| Configuration | Password-protected parameters, optional memory card for repeat configurations, PC software, NFC configuration via MyPixsys app for Android smartphones | | |

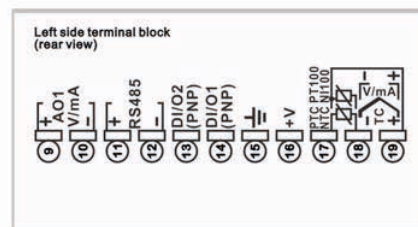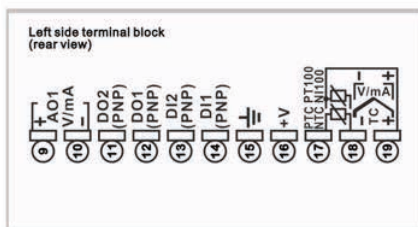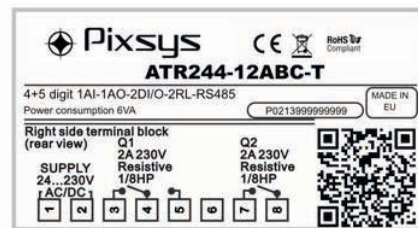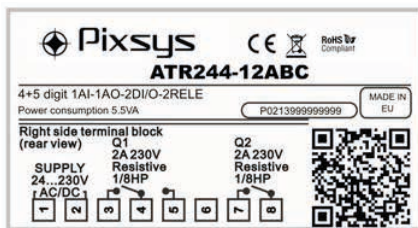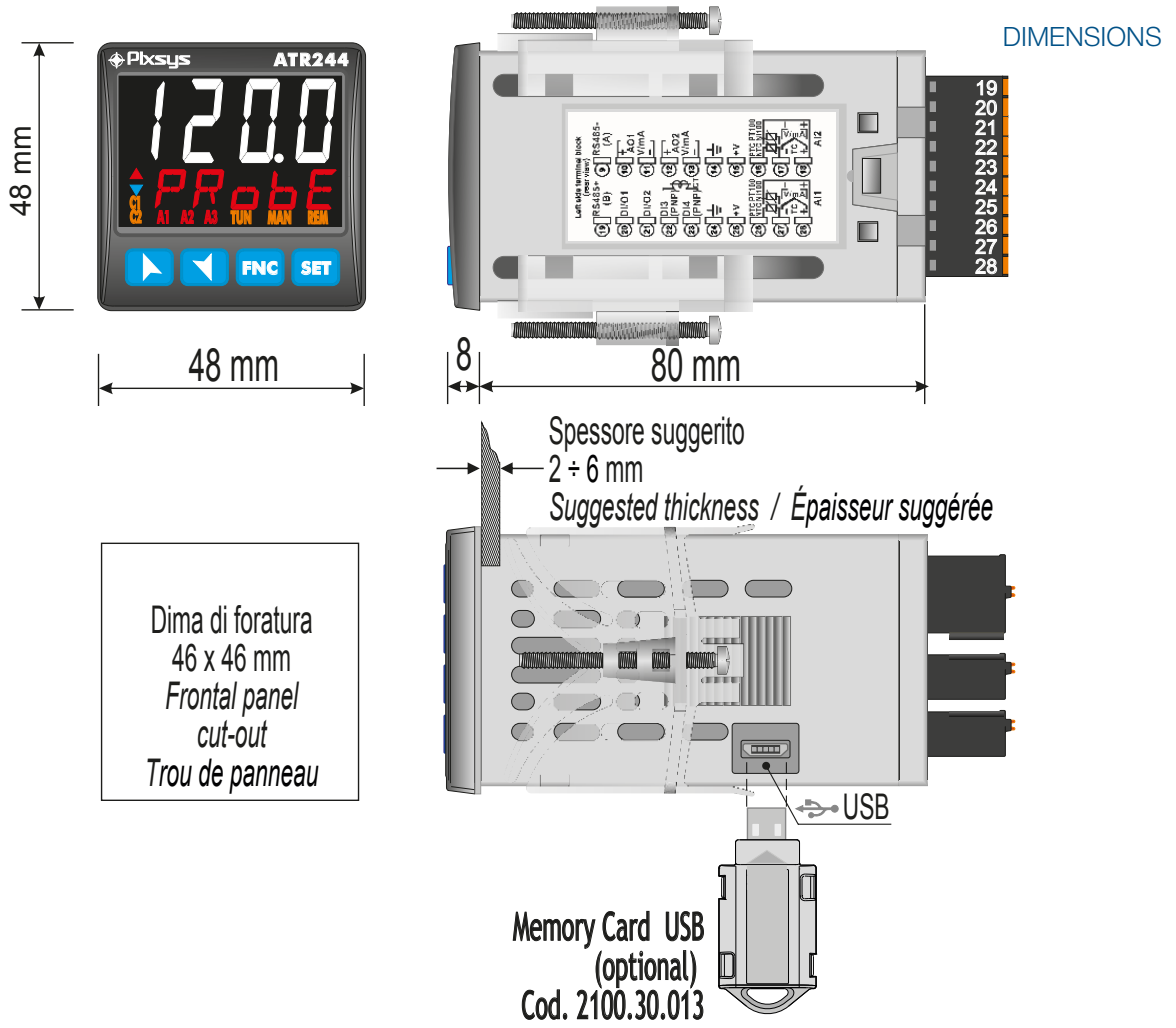

MODEL NUMBERS

All models have supply voltage 24 to 230 V AC/DC

ATR244-12ABC 1 analogue input + 2 relays 5 A + 2 SSR output + 2 digital input + 1 analogue output V / mA

ATR244-12ABC-T 1 analogue input + 2 relays 5 A + 2 (SSR output or digital input) + 1 analogue output V / mA + RS485 communications

For dual input models please contact Calex.

8-Channel Panel-Mounted Display for Modbus Sensors



- Read or write 8 variables from Modbus sensors
- Simultaneously view up to 4 variables per page, with 2 pages
- Compatible with all Calex Modbus infrared temperature sensors, and other Modbus devices
- Isolated RS485 Modbus Master interface
- Multimaster – up to 16 STR571 masters on the same network of slaves
- RS485 Modbus Slave interface for connection to a larger network
- 2 Alarm Relay Outputs, and inputs for external controls


The STR571 is a versatile interface and display unit for Modbus sensors, I/O modules, signal converters and other Modbus devices in general.

Up to 8 variables may be read or written on Modbus slave devices, with the variables shown on-screen numerically or in text.

The description and measuring units of each variable are configurable, and display data may be rescaled.

Up to 4 variables may be displayed simultaneously. Text is automatically resized depending on the number of variables being displayed.

Digital inputs allow connection of a rotary encoder that makes it even easier to navigate the displayed data and the configuration interface, or connection to panel buttons with programmable functions.

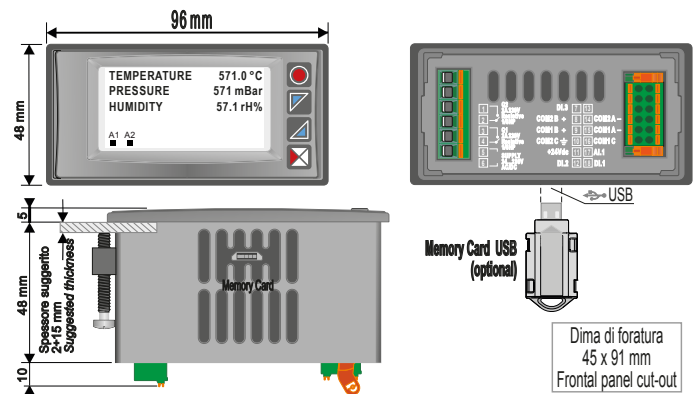

SPECIFICATIONS

| Communications and Outputs | |
|----------------------------|---|
| Communications and Outputs | 1 x RS485 Modbus RTU Master interface, supports 8 channels, e.g. for PyroMiniBus temperature sensors |
| Modbus Slave | RS485 Modbus RTU Slave interface |
| Inputs | 3 digital inputs allowing the connection of external controls such as a rotary encoder: 2 x PNP/NPN inputs e.g. to enable outputs, reset alarms, lock configuration, increase/decrease value; 1 x PNP input programmable to select values |
| Outputs | 2 alarm relays, configurable, rated 250 V AC, 2 A, on/off, with hysteresis |
| General | |
| Display | OLED monochrome yellow |
| Supply Voltage | 24-230V AC / DC ± 10% 50/60 Hz (with 2500 V galvanic isolation) |
| Power Consumption | 6 VA |
| Mechanical | |
| Housing dimensions | 96x48 (front) x 48 mm (1/8 DIN) |
| Housing material | Polycarbonate V0 |
| Weight | Approximately 165 g |
| Wiring | Removable spring-lock terminal blocks |
| Configuration | Via built-in push-button controls using simple menu system |

| Environmental | |
|-------------------------|--|
| Temperature | Operating range 0-45 ° C |
| Humidity | Operating range 35-95% RH (non-condensing) |
| Protection | Front panel: IP54 (IP65 with sealing), and container terminals: IP20 |
| Software Features | |
| 8 Variables | 8-channel data management, view 1 to 4 variables on each page, editable text description of each variable (max 16 characters), editable measurement units for each variable (max 5 characters), 1, 16, or 32 bit data format, editable text display for variable values between 0 and 4, configurable display value (offset, gain, limits, rescale). |
| 2 Alarms | ON-OFF with hysteresis |
| Alarm mode | Absolute / threshold, band with choice of activation mode (instantaneous / delayed / retentive / by digital input), activation by serial line |
| Multimaster | Connect up to 16 x STR571 master devices on the same Modbus network |
| Interface Language | English, Italian, German, French, Spanish |
| Options | Optional front panel encoder to facilitate input of data |
| Model Numbers | |
| STR571-1ABC-T128 | 8-channel panel-mounted Modbus indicator |
| Options (contact Calex) | Compatible infrared temperature sensors Rotary encoder |

Thermocouples and RTDs

- Temperature probes manufactured to your requirements
- All thermocouple types including Type J, K, N, R, S, T and B
- Platinum resistance thermometers including Pt100 and Pt1000
- PTC and NTC thermistors
- Probe materials such as stainless steel, ceramic, Inconel and titanium
- Probes available with hardwired cable, or fitted with a sealed connection head
- Optional temperature transmitter and extension cable
- Curved or straight probes, diameters from 1 mm to 30 mm
- Choice of process connections
- Let us know your requirements and we will help you find a suitable probe



Ceramic probes



Curved probes



DIN connection head
and threaded mounting



Exposed-junction wire thermocouples




Hardwired cables



Low-cost sealed connection boxes



Probes fitted with M12 connectors

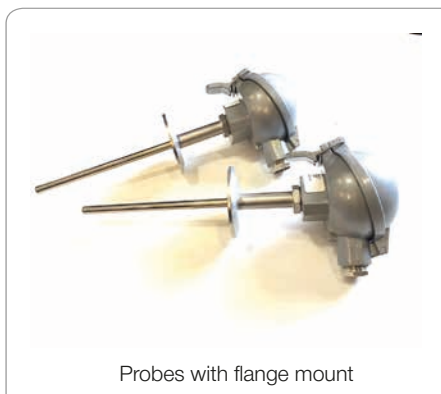

Probes with flange mount



Screw clamp process
connection

Fixed Mount Infrared Temperature Calibration Checker



The FTK provides a quick and accurate way to check the calibration of infrared temperature sensors.

This rugged and portable unit is designed to provide fast calibration checks anywhere they are needed, from the factory to the workshop or laboratory.

Eighteen models are available; offering target temperatures from 35°C or 150°C, all providing outstanding stability with less than $\pm 0.2^\circ\text{C}$ deviation.

The FTK takes between 5 and 15 minutes to heat and stabilise at the desired temperature (depending on the model), and uses a clear LED to show when it has reached that temperature: green when the FTK is warming up, orange when the FTK is ready for operation and red when the FTK is above the calibration temperature.

The FTK can be used with any infrared temperature sensor that is able to measure between 35°C and 150°C and can focus on a target area less than $\varnothing 50.8$ mm.


SPECIFICATIONS

| Calibration Source | |
|---|--|
| Target Temperature: | from 35 °C to 150 °C depending on model (see table overleaf) |
| Emissivity (e): | 0.98 \pm 0.004 (for wavelength of 2 to 5.4 μm and 8 to 14 μm) |
| Aperture diameter: | 50.8 mm |
| Warm-up time: | max. 5 minutes (FTK 35) to 15 minutes (FTK 150) |
| Temperature uncertainty: | 0.4 °C for $T_{\text{amb}} = 10$ to 30 °C (FTK 35 - 120) 0.6 °C for $T_{\text{amb}} = 0$ to 10 °C (FTK 35 - 120) 0.5 °C for $T_{\text{amb}} = 10$ to 40 °C (FTK 130 - 150) 0.7 °C for $T_{\text{amb}} = 0$ to 10 °C (FTK 130 - 150) |
| Repeatability: | 0.2 °C |
| Stability: | 0.1 °C |
| Temperature uniformity: | 0.2 °C (central area $\varnothing 45$ mm) |
| Operating temperature: T_{amb} : | 0 to 30 °C, temporary (2 minutes) up to 70 °C |
| Storage temperature: | 0 to 70 °C |
| Relative humidity: | 10 to 85 %, non condensing |
| Status LED: | green: warm-up orange: ready for operation red: above calibration temperature |
| Power supply: | 24 V DC, max. 1 A |
| Protection class: | IP50 (EN 60529) |
| Weight: | 0.9 kg |
| Dimensions [mm]: | 64.5 x 81.0 x 133.5 (\varnothing x D x H) |
| CE marking: | according to EU regulations |

POWER SUPPLY

| Model | Description |
|------------------|---|
| Power supply | 100 to 240 V AC, 50 Hz |
| Output | 24 V DC, 1.3 A |
| Protection class | EN 60950 |
| Weight | approx. 0.3 kg |
| CE marking | according to EU directives regarding electromagnetic immunity |

DIMENSIONS

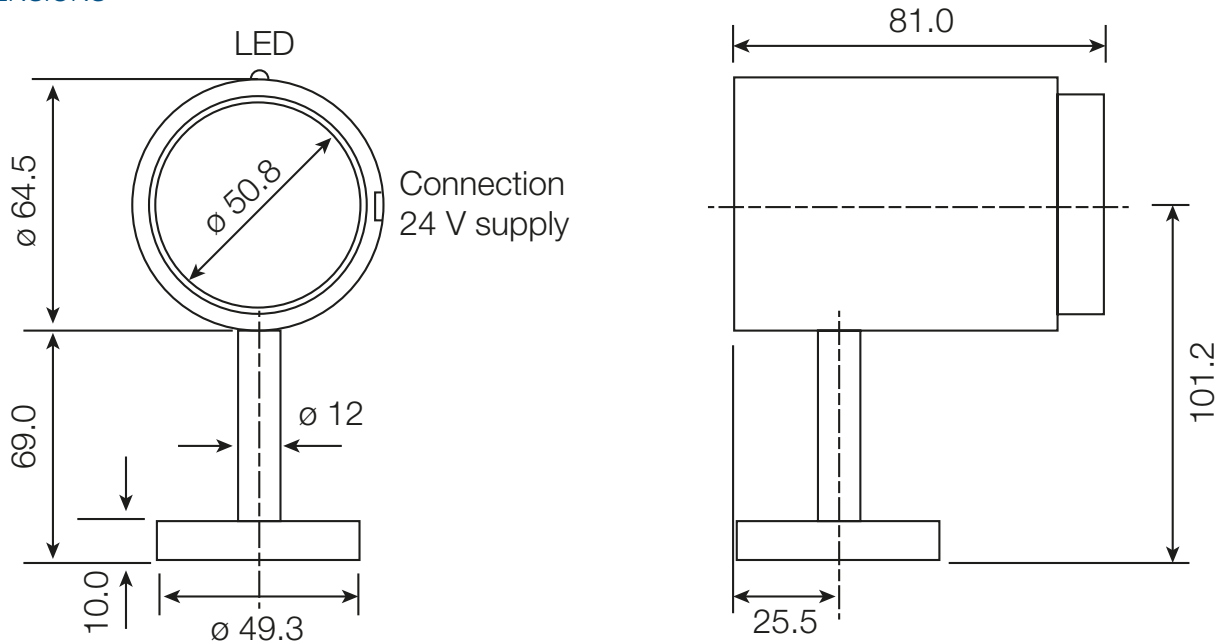

MODELS

| Model | Description | Target Temperature |
|---------|----------------------------|--------------------|
| FTK 35 | Calibration source FTK 35 | 35 °C |
| FTK 45 | Calibration source FTK 45 | 45 °C |
| FTK 50 | Calibration source FTK 50 | 50 °C |
| FTK 55 | Calibration source FTK 55 | 55 °C |
| FTK 60 | Calibration source FTK 60 | 60 °C |
| FTK 65 | Calibration source FTK 65 | 65 °C |
| FTK 70 | Calibration source FTK 70 | 70 °C |
| FTK 75 | Calibration source FTK 75 | 75 °C |
| FTK 80 | Calibration source FTK 80 | 80 °C |
| FTK 85 | Calibration source FTK 85 | 85 °C |
| FTK 90 | Calibration source FTK 90 | 90 °C |
| FTK 95 | Calibration source FTK 95 | 95 °C |
| FTK 100 | Calibration source FTK 100 | 100 °C |
| FTK 110 | Calibration source FTK 110 | 110 °C |
| FTK 120 | Calibration source FTK 120 | 120 °C |
| FTK 130 | Calibration source FTK 130 | 130 °C |
| FTK 140 | Calibration source FTK 140 | 140 °C |
| FTK 150 | Calibration source FTK 150 | 150 °C |

ACCESSORIES

| Model | Description |
|-------------|---|
| FTKPSU | Power supply 100 to 240 V AC or 24 V DC |
| FTKPLUG-EU | Power plug EU |
| FTKPLUG-USA | Power plug US |
| FTKPLUG-UK | Power plug UK |
| FTKPLUG-AUS | Power plug AUS |
| FTKMOUNT | Adjustable ball and socket mounting block |



- High performance blackbody calibration source for infrared temperature sensors
- Adjustable temperature setpoint 30°C to 550°C
- Very high emissivity > 0.995
- 65 mm cavity diameter

GENERAL SPECIFICATIONS

| | |
|---------------------------|--|
| Temperature Range | 30°C to 550°C |
| Emissivity | Greater than 0.995 |
| Stability | ±0.1°C |
| Display Resolution | 0.01°C to 99.99; 0.1°C from 100 to 550 |
| Heating Time | 45 minutes |
| Aperture Diameter | 65 mm |
| Cavity Depth | 160 mm |
| PC Interface | Included |
| Power | 1000 W typical |
| Voltage | 100-130 or 208-240 V AC, 50/60 Hz |
| Dimensions | H 310 mm, W 265 mm, D 200 mm |
| Weight | 10 kg |

OPTIONS

| | |
|--|------------|
| Gallium Hockey Puck Cell | 431-03-00 |
| Indium Hockey Puck Cell | 976-05-00A |
| Tin Hockey Puck Cell | 976-05-00B |
| Zinc Hockey Puck Cell | 976-05-00C |
| Orifice Plates 10, 20, 30, 40 50 mm | 976-01-05 |
| (Restricts Cavity Aperture) | |
| Carrying Case | 931-22-64 |

The BB976 Portable Blackbody Calibration Source allows for calibration of non-contact infrared thermometers over the temperature range 30°C to 550°C.

It is suitable for use as a primary radiation source for infrared thermometers.

Laboratory performance and low uncertainty calibrations are ensured by the combination of high emissivity and excellent temperature uniformity.


The digital temperature controller allows the block temperature to be set to any value from 30°C to 550°C.

Traceability of the radiance temperature is established by a separate, built-in temperature indicator and included platinum resistance thermometer.

A three point traceable calibration certificate is included. UKAS calibration of the resistance thermometer is available, as is radiometric calibration.

Uniformity of the block is ensured by using distributed heating technology.

For the smallest of uncertainties the BB976 may be used with ITS-90 Fixed Point Cells, Gallium 29.7646°C, Indium 156.5985°C, Tin 231.928°C and Zinc 419.527°C. The cells are provided with a certificate of metal purity.

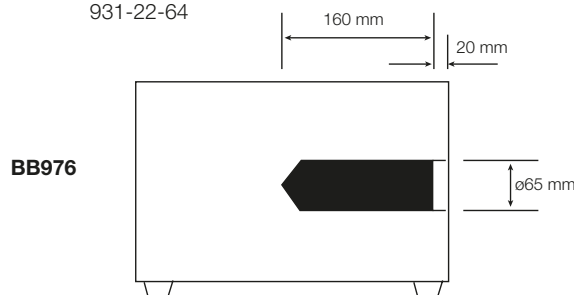



- High performance blackbody calibration source for infrared temperature sensors
- Adjustable temperature setpoint -10°C to 80°C
- Very high emissivity > 0.995
- 50 mm cavity diameter

GENERAL SPECIFICATIONS

| | |
|---------------------------|------------------------------|
| Temperature Range | -10°C to 80°C |
| Emissivity | Greater than 0.995 |
| Stability | ±0.1°C |
| Display Resolution | 0.01°C |
| Heating Time | 45 minutes to 80°C |
| Cooling Time | 45 minutes to -10°C |
| Aperture Diameter | 50 mm |
| Cavity Depth | 150 mm |
| PC Interface | Included |
| Power | 200 W typical |
| Voltage | 100-130 or 208-240 V AC |
| Dimensions | H 310 mm, W 265 mm, D 200 mm |
| Weight | 10 kg |

OPTIONS

| | |
|---|-----------|
| Orifice Plates 10, 20, 30, 40 50 mm (Restricts Cavity Aperture) | 812-01-06 |
| Carrying Case | 931-22-64 |

The BB982 Portable Blackbody Calibration Source allows for calibration of non-contact infrared thermometers over the temperature range -10°C to 80°C.

It is suitable for use as a primary radiation source for infrared thermometers from sub zero to 80°C.


Laboratory performance and low uncertainty calibrations are ensured by the combination of high emissivity and excellent temperature uniformity.

The digital temperature controller allows the block temperature to be set to any value from -10°C to 80°C.

Traceability of the radiance temperature is established by a separate, built-in temperature indicator and included platinum resistance thermometer.

A three point traceable calibration certificate is included. UKAS calibration of the resistance thermometer is available, as is radiometric calibration.

Uniformity of the block is ensured by distributed thermoelectric heat pumps with the benefit of solid state vibration-free cooling.

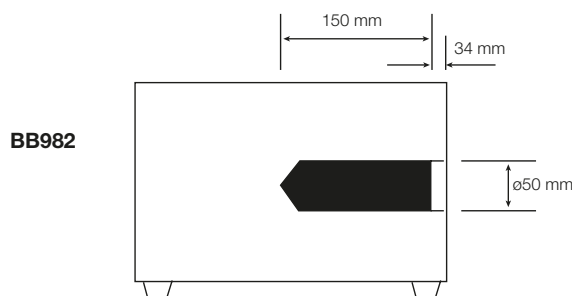

32000 Series


Open Frame AC/DC Regulated Linear Power Supplies



GENERAL SPECIFICATIONS

| | |
|--|--|
| A.C. Input | 100/120/220/240 V AC +10%, -12%, 47 to 60 Hz |
| D.C. Output | See Voltage/Current Rating Chart. Adjustment range $\pm 5\%$ minimum. |
| Line Regulation | $\pm 0.05\%$ for a 10% line change. |
| Load Regulation | $\pm 0.05\%$ for a 50% load change. |
| Output Ripple | 2 V to 15 V units: 5.0 mV PK-PK maximum 20 V to 28 V units: 0.02% PK-PK maximum |
| Transient Response | 50 μ s for a 50% load change |
| Short Circuit and Overload Protection | Automatic current limit/foldback |
| Overvoltage Protection | Built-in on all 5 V outputs. Set at 6.2 V ± 0.4 V Other models use optional overvoltage protection. See Option 3 overleaf |
| Remote Sensing | Provided on most models, open sense load protection built in. |
| Stability | $\pm 0.3\%$ for 24 hour period after 1 hour warm-up |
| Temperature Rating | Standard Range: 0°C to +50°C full-rated, derated linearly to 40% at 70°C Extended Range: -40°C to +50°C full-rated, derated linearly to 40% at 70°C |

TEMPERATURE DERATING CURVE

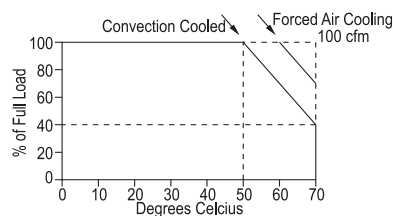

| | |
|--------------------------------|--|
| Temperature Coefficient | $\pm 0.03\%/^{\circ}\text{C}$ maximum |
| Efficiency (typical) | 5V unit: 45%; 12 V and 15 V units: 55%; 24 V units: 60% |
| Isolation | Input to ground: 3750 V AC min. Input to output(s): 3750 V AC min. Output to ground: 500 V AC min. Leakage current (live to ground): 5 μ A max. |
| RoHS Compliant | Yes |

These high quality linear regulated power supplies provide outstanding value and are designed for ease of application and long trouble-free life. They will accommodate AC inputs from 100 V to 240 V and provide a wide range of DC outputs with very low ripple.

All 32000 series power supplies are built around industry-standard case sizes to simplify installation and a 3.75 kV isolation safety transformer. For additional safety the transformer primary is protected from thermal overloads by a thermal fuse. This fuse will blow if a transformer temperature of 130°C is exceeded. Every unit incorporates a safety earth tag.

All models are fitted with automatic foldback current limiting. An overvoltage protection (OVP) circuit protects sensitive loads against excessive voltage such as in TTL logic. OVP is a standard feature of all 5 V output units and an option on all other units.

The remote sensing feature, included in almost all 32000 series power supplies, may be used to compensate the voltage drop across the load lines. All dual-output power supplies feature a unique anti-latch circuit to minimise common mode latch up.

SINGLE OUTPUT MODELS

| Model | Output Voltage Volts | Output Current Amps | Case |
|------------|----------------------|---------------------|------|
| 32005AR | 5 | 3.0 | A |
| 32005BR | 5 | 6.0 | B |
| 32005CR | 5 | 9.0 | C |
| 32005DR | 5 | 12.0 | D |
| 32012AR | 12 to 15 | 1.7 | A |
| 32012BR | 12 to 15 | 3.4 | B |
| 32012CR | 12 to 15 | 5.1 | C |
| 32012DR | 12 to 15 | 6.8 | D |
| 32012ER | 12 to 15 | 10.2 | E |
| 32024AR | 24 to 28 | 1.2 | A |
| 32024BR | 24 to 28 | 2.4 | B |
| 32024CR | 24 to 28 | 3.6 | C |
| 32024DR | 24 to 28 | 4.8 | D |
| 32024ER | 24 to 28 | 7.2 | E |
| 32024ER/10 | 24 to 28 | 10.0 | E |
| 32048AR* | 48 | 0.5 | A |
| 32150AR | 120 to 200 | 0.150** | A |

* No remote sensing

** Output current from 180 to 200V falls linearly from 150mA to 125mA

OVP SELECTION CHART

| Case | OVP Model Required | |
|---------------|--------------------|--------------------------------|
| Single Output | A/B/C/D | 32901AR |
| | E | 32901BR |
| Dual Output | AA/BB/CC | 32901AR, protects both outputs |
| | E | 32901BR, protects both outputs |
| Triple Output | AA/AAA/D | 32901AR, protects dual outputs |
| | BBB/131 | OVP built-in on 5 V outputs |

DUAL OUTPUT MODELS

| Model | Output 1 | | Output 2 | | Case |
|---------|---------------|--------------|--------------|--------------|------|
| | Voltage Volts | Current Amps | Voltage Volt | Current Amps | |
| 32212AR | 12 to 15 | 1.0 | -12 to -15 | 1.0 | AA |
| 32212BR | 12 to 15 | 1.7 | -12 to -15 | 1.7 | BB |
| 32212CR | 12 to 15 | 3.4 | -12 to -15 | 3.4 | CC |

TRIPLE OUTPUT MODELS




| Model | Output 1 | | Output 2 | | Output 3 | | Case |
|---------|---------------|--------------|---------------|--------------|---------------|--------------|------|
| | Voltage Volts | Current Amps | Voltage Volts | Current Amps | Voltage Volts | Current Amps | |
| 32305AR | 5* | 2.0 | 9 to 15* | 0.4 | -9 to -15* | 0.4 | AA |
| 32305BR | 5 | 3.0 | 12 to 15 | 1.0 | -12 to -15 | 1.0 | AAA |
| 32305DR | 5 | 6.0 | 12 to 15 | 1.7 | -12 to -15 | 1.7 | BBB |
| 32305ER | 5 | 8.0 | 12 to 15 | 1.7 | -12 to -15 | 1.7 | BBB |
| 32305FR | 5 | 12.0 | 12 to 15 | 1.7 | -12 to -15 | 1.7 | DBB |

OPTIONS


- 1 Tropicalisation – suffix code 'T'
- 2 Low temperature operation -40°C to +50°C – suffix code 'LT'
- 3 Overvoltage Protection Modules – These optional Overvoltage Protection Modules are available for use with any power supply NOT supplied with built-in OVP. Each is adjustable from 6.4V to 34V and should be used when maximum load protection is of prime importance. Response time is 1 ms. Mounting holes are provided on the chassis for these modules, which mount within the specified outline dimensions of each power supply.

32000 SERIES - GENERAL DIMENSIONS

All dimensions are in mm

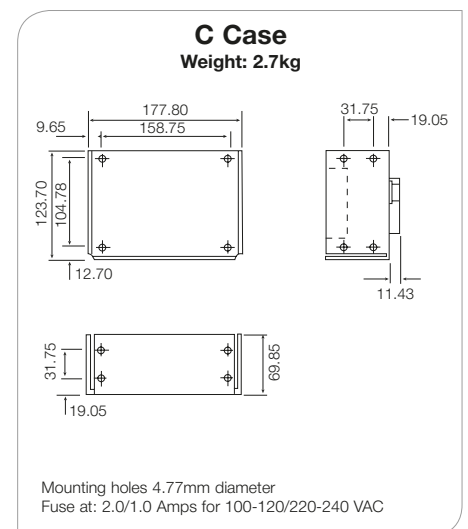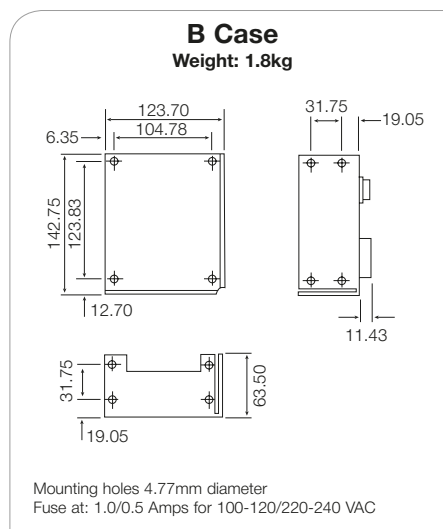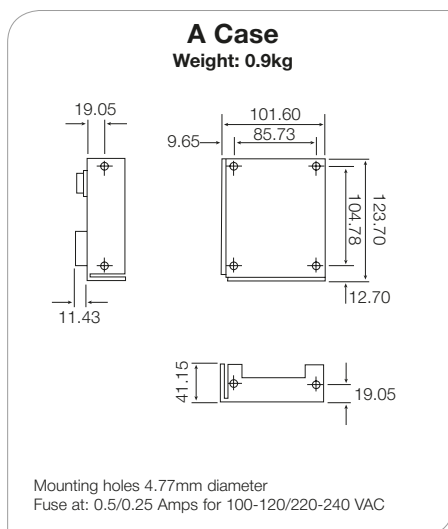


D Case
Weight: 3.4kg

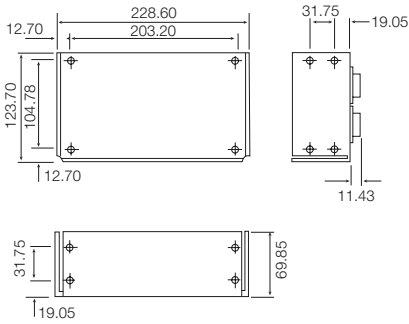


Mounting holes 4.77mm diameter
Fuse at: 2.0/1.0 Amps for 100-120/220-240 VAC

E Case
Weight: 4.5kg

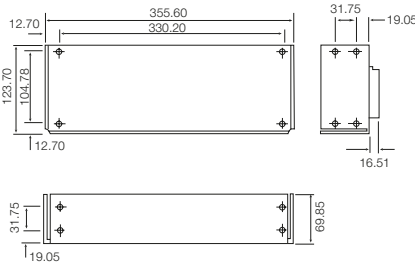


Mounting holes 4.77mm diameter
Fuse at: 3.0/1.5 Amps for 100-120/220-240 VAC

AA Case
Weight: 0.9kg

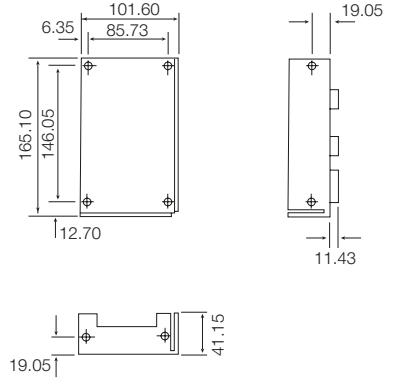


Mounting holes 4.77mm diameter
Fuse at: 0.5/0.25 Amps for 100-120/220-240 VAC

BB Case
Weight: 1.8kg

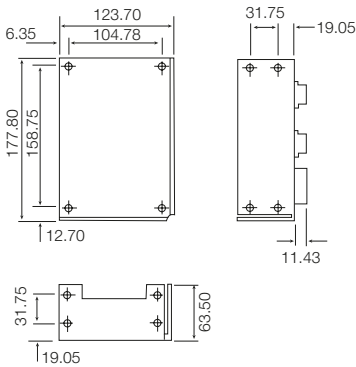


Mounting holes 4.77mm diameter
Fuse at: 2.0/1.0 Amps for 100-120/220-240 VAC

CC Case
Weight: 3.2kg

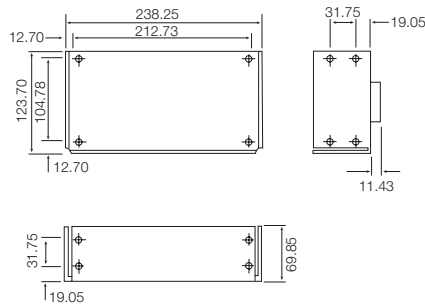


Mounting holes 4.77mm diameter
Fuse at: 2.0/1.0 Amps for 100-120/220-240 VAC

AAA Case
Weight: 2.3kg

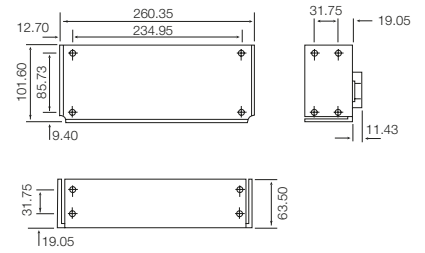


Mounting holes 4.77mm diameter
Fuse at: 1.0/0.5 Amps for 100-120/220-240 VAC

BBB Case
Weight: 3.6kg

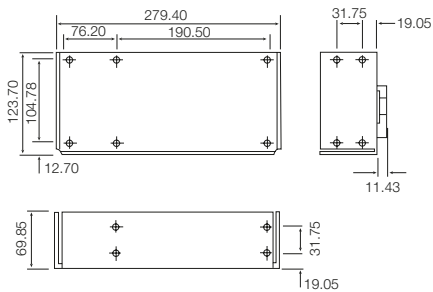

Mounting holes 4.77mm diameter
Fuse at: 2.0/1.0 Amps for 100-120/220-240 VAC

DBB Case
Weight: 5.0kg

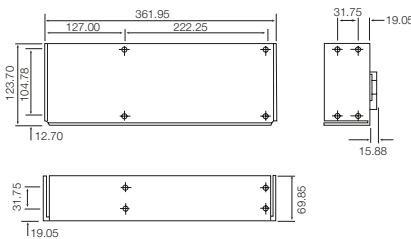


Mounting holes 4.77mm diameter
Fuse at: 3.0/1.5 Amps for 100-120/220-240 VAC

Overvoltage Protection Modules

OVP-12
32901A

OVP-24
32901B

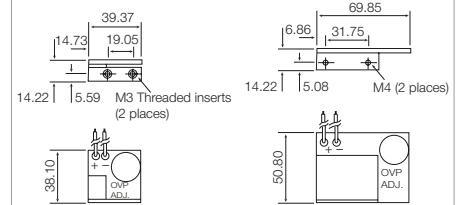

41000 Series

DIN Rail Mounting Power Supplies for Instrumentation Applications



GENERAL SPECIFICATIONS

| | |
|-----------------------------------|---|
| Input | 115 V AC or 230 V AC ($\pm 10\%$) link selectable |
| DC Output | See model chart |
| Ripple & Noise | less than 5 mV rms. |
| Output Voltage Tolerance | $\pm 0.5\%$ max. |
| Load Regulation | $\pm 0.2\%$ for 50% load change |
| Line Regulation | $\pm 0.05\%$ for 10% line change |
| Isolation: Input to output | 3750 V AC min. |
| Temperature Rating | Standard Range: 0°C to +50°C full-rated, derated linearly to 40% at 70°C |
| Environmental Rating | IP20 |
| Case Size | (l x w x h) 119.2 x 45 x 73.2 mm. |
| Case Material | Polycarbonate (self extinguishing to UL 94V-0) |
| Weight | 0.37 kg 41245: 0.53 kg |

The 41000 Series range of power supplies are designed for quick and trouble-free installation onto 35mm profile DIN rails. With outputs ranging from 5V to 24V and maximum current capabilities from 100mA to 500mA, these units are ideal for most instrumentation and control systems.

Every model in the range is provided with output current foldback limiting and is fully short-circuit protected. Great attention has been taken to usability and safety. The double insulated housing protects users without the need for earthing. A green "supply on" LED is provided to clearly indicate the presence of power, and link selection allows the use of 110 or 230V supplies without derating.

| Model | Output Voltage Volts | Output Current mA |
|-------|----------------------|-------------------|
| 41052 | 5 | 200 |
| 41055 | 5 | 500 |
| 41121 | 12 | 100 |
| 41122 | 12 | 200 |
| 41124 | 12 | 400 |
| 41151 | 15 | 100 |
| 41153 | 15 | 300 |
| 41241 | 24 | 100 |
| 41242 | 24 | 200 |
| 41245 | 24 | 500 |

52000 Series

Chassis Mounting AC/DC Single/Dual Output Linear Power Supplies



GENERAL SPECIFICATIONS

| | |
|---------------------------|---|
| AC Input | 216 to 264 V AC, 47 to 60 Hz |
| Temperature Rating | 0 to +50°C (fixed-voltage units) -25 to +50°C (adjustable-voltage units) |
| Overall Dimensions | (l x w x h) 160 x 100 x 57 mm |

SINGLE FIXED OUTPUT REGULATED MODELS

| Model * | Output Voltage Volts | Output Current Amps | Line Regulation mV | Load Regulation mV | Output Ripple mV |
|---------|----------------------|---------------------|--------------------|--------------------|------------------|
| 52012 | 12 | 1.0 | 120 | 120 | 30 |
| 52024 | 24 | 0.5 | 500 | 500 | 30 |
| 52048 | 48 | 0.25 | 500 | 500 | 30 |

SINGLE ADJUSTABLE OUTPUT REGULATED MODELS

| Model * | Output Voltage Volts | Output Current Amps | Line Regulation mV | Load Regulation mV | Output Ripple mV |
|---------|----------------------|---------------------|--------------------|--------------------|------------------|
| 52008A | 4 to 12 | 1.0 | 120 | 30 | 6 |
| 52015A | 10 to 20 | 0.5 | 20 | 30 | 10 |
| 52024A | 18 to 30 | 0.25 | 25 | 30 | 15 |

DUAL ADJUSTABLE OUTPUT REGULATED MODEL

| Model * | Output Voltage Volts | Output Current Amps | Line Regulation mV | Load Regulation mV | Output Ripple mV |
|---------|----------------------|---------------------|--------------------|--------------------|------------------|
| 52212A | ± 10 to 15 | 0.5 | 10 | 20 | 5 |

* For RoHS compliant version, add suffix 'R' to model number

These high quality linear regulated power supplies provide outstanding value and are designed for ease of application and long trouble free life.

Different models are available with fixed or adjustable outputs. There is also a model with adjustable dual outputs.

The 52000 Series uses rugged screw terminal blocks for input and output connections. Those models with adjustable outputs can be set via an easily accessible potentiometer.

The metal case used on all models provides screening, and threaded inserts allow these supplies to be mounted on the insulated base or on the side.

Adjustable output models are short circuit protected. Fixed voltage models can have their outputs short circuited for a maximum of three minutes.