



LAYOUT
ESPAÑOL



LAYOUT
US



Vandal Proof



Dust Proof



Water Proof

PRODUCT GALLERY



Model Number: Wired Glass Keyboard LBGKB3501

Ip68 water and dust protection
 Language layouts available on Request
 Haptic or Audible feedback when typing
 Plug and Play. Easy to install, no driver needed
 Communication: USB2.0
 Can be used with medical gloves and wet fingers
 Weight: 0.87kg
 Dimension: 436x160x20mm
 Interface: USB
 Material: Tempered Glass+Rugged ABS case
 Color: Medical white
 Key size: 18x18mm
 Touchpad Size: 119x102mm
 Box Dimension: 470x196x48mm
 Carton: 50x40x30cm 10pcs/carton
 Carton GW: 17.5KGS



Model Number: Metal Keyboard with Trackball LBKB35001

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.



Model Number: Black Keyboard LBKB35001-BL

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35001-FL (Flat keys)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard with touchpad LBKB35001T

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.60kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35001T-FL (Flat keys)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.60kg.
 All languages version and interface are available on request.



Model Number: LBKB35001T-P

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 400mm x 124mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 64 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.60kg.
 All languages version and interface are available on request.



Model Number: LBKb35002

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 300mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.40kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35003

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 330mm x 100mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.50kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35005

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 135mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 83 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.10kg.
 All languages version and interface are available on request.



Model Number: Rugged Keyboard LBKB35005K

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 478mm x 135mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 106keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.80kg.
 All languages version and interface are available on request.



Model Number: Black Keyboard LBKB35005KBL

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 478mm x 135mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 106keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.50kg.
 All languages version and interface are available on request.



Model Number: Industrial Keyboard LBKB35005K-DT (Desktop)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 502mm x 164mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Desktop
 No. of keys: 106keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.50kg.
 All languages version and interface are available on request.



Model Number: LBKB35005L (Backlight keyboard)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 135mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 83 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.10kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35006

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 135mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 83 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.00kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35006-P

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 416mm x 159mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel mounting
 No. of keys: 83 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.00kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35007 (Optical trackball)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 392mm x 110mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.




Model Number: Metal Keyboard LBKB35008

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 295mm x 105mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.50kg.
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35008K

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 320mm x 105mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 79 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.50kg.
 All languages version and interface are available on request.

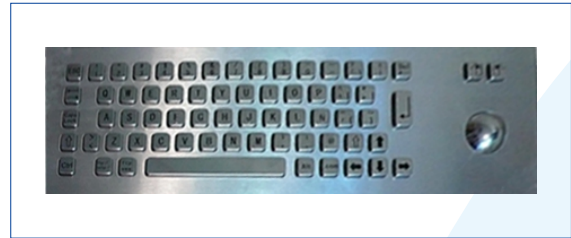

Model Number: Panel Mount Keyboard LBKB35010

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 400mm x 124mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.




Model Number: Metal Keyboard LBKB35012

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 319mm x 135mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 83 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.




Model Number: Metal Keyboard LBKB35015

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 420mm x 125mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 83 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.50kg.
 All languages version and interface are available on request.

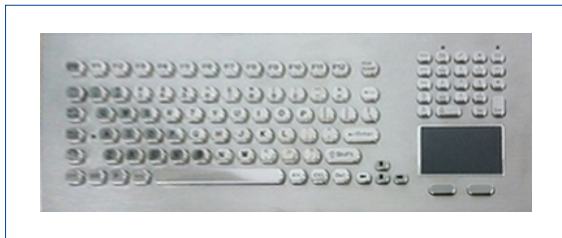

Model Number: Metal Keyboard with touchpad LBKB35020

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 385mm x 180mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 104keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.

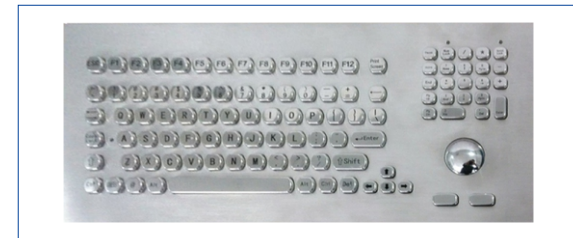

Model Number: Metal Keyboard with Trackball LBKB35021

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 385mm x 180mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 104keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.00kg.
 All languages version and interface are available on request.



Model Number: LBKB35022 Metal Keyboard with Imported Cherry Switch

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 372mm x 102mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 65 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.80kg.
 All languages version and interface are available on request.




Model Number: Metal Keyboard LBKB35200

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 330mm x 100mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 71 keys, high quality stainless steel
 Track ball diameter: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.8kgs
 All languages version and interface are available on request.



Model Number: Metal Keyboard LBKB35205

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 330mm x 125mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 86 keys, high quality stainless steel
 Track ball diameter: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.10kg.
 All languages version and interface are available on request.

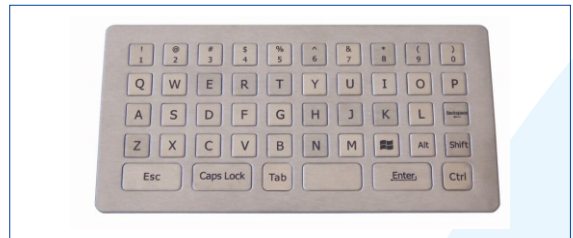

Model Number: LBKB35300 Metal Keyboard

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 190mm x 98mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 46 keys, high quality stainless steel
 Etching and inking lettering
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1kg.
 All languages version and interface are available on request.



Model Number: Industrial Keyboard LKBKA351 (Desktop)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 412mm x 124mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Desktop
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.30kg.
 All languages version and interface are available on request.



Model Number: Industrial Keyboard LKBKA352 (Desktop)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 412mm x 124mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Desktop
 No. of keys: 64 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.20kg.
 All languages version and interface are available on request.



Model Number: Industrial Keyboard LKBKA353 (Desktop)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 412mm x 155mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Desktop
 No. of keys: 83 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.80kg.
 All languages version and interface are available on request.



Model Number: Industrial Keyboard LKBKA354 (Desktop)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 412mm x 155mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Desktop
 No. of keys: 83 keys, high quality stainless steel
 Touch pad
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.60kg.
 All languages version and interface are available on request.



Model Number: Stainless steel Keyboard LBKBCA356 (Desktop)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 346mm x 175mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Desktop
 No. of keys: 83 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.00kg.
 All languages version and interface are available on request.



Model Number: Metal Keypad LBKP35901

Stainless steel keypad (Encryption Available)
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: Matrix , USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 91.5mm x 87.5mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 16keys, High quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.70kg.
 All languages version are available on request.



Model Number: Metal Keypad LBKP35902

Encryption numeric keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: RS232 and USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 160mm x 102mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 16keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 All languages version are available on request.



Model Number: Metal Keypad with Trackball LBKP35903

Metal keypad with trackball
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: RS232 and USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 196mm x 120mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 16keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.2kg.
 All languages version are available on request.



Model Number: Metal Keypad LBKP35906

Stainless steel keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: Matrix , USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 100mm x 66mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 12keys, High quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.4kg.
 All languages version are available on request.



Model Number: Metal Keypad LBKP35912

Encryption numeric keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: RS232 and USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 145mm x 100mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 16keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 All languages are available on request.



Model Number: Metal Keypad LBKP35923

Metal Numeric keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: RS232 and USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 160mm x 102mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 16keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 All languages version are available on request.



Model Number: Metal Keypad LBKP35924

Metal Numeric keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: RS232 and USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 120mm x 90mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 20keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 All languages version are available on request.



Model Number: LBKP35927

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: Matrix, USB available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 304mm x 216mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 No. of keys: 16keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.10kg.
 All languages version and interface are available on request.




Model Number: LBKP-MB351

Numeric keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: Matrix , USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 79mm x 77mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 16keys
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.25kg.
 All languages version are available on request.



Model Number: LBKP-MB352

Numeric keypad
 Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: Matrix , USB or PS2 available
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 70mm x 62mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 12keys
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.25kg.
 All languages version are available on request.

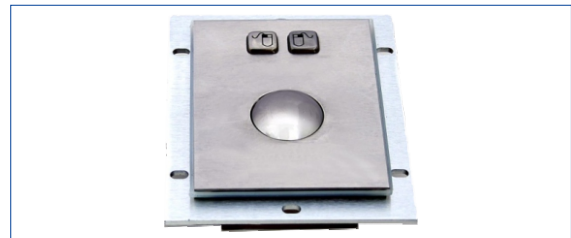

Model Number: LBKT35100 38mm Trackball

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 110mm x 83mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 Optional for Mechanical or Optical ball



Model Number: LBKT35100DT 38mm Trackball

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 110mm x 83mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 Optional for Mechanical or Optical ball



Model Number: LBKT35100-P 38mm Trackball

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 134mm x 107mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 Optional for Mechanical or Optical ball




Model Number: LBKT35101 38mm Trackball with 3 mouse keys

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 110mm x 83mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 Optional for Mechanical or Optical ball



Model Number: LBKWS35001 (Back mount)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Panel dimensions: 440mm x 220mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Back mount
 No. of keys: 64 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.50kg.
 All languages version and interface are available on request.

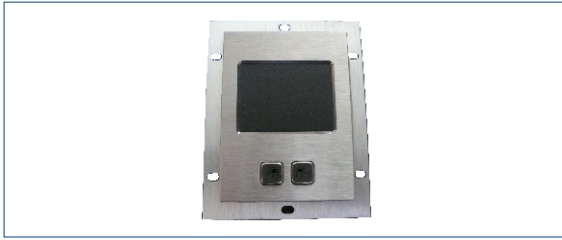


Model: Metal touchpad LBKC35300

Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 110mm x 83mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.75kg.
 Optional for Mechanical or Optical ball



Model Number: Metal Touchpad LBKC35301

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 80mm x 80mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.5kg.

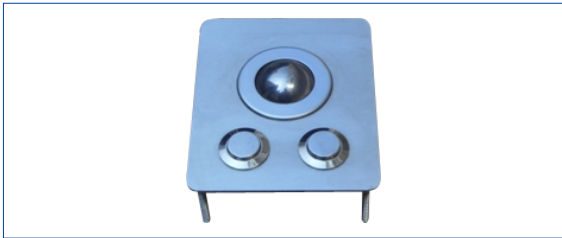

Model Number: LBKT35103 25mm Trackball with 2 mouse keys

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 82mm x 67mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Panel Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.5kg.
 Optional for Mechanical or Optical ball



Model Number: LBKT35105 25mm Trackball with 2 mouse keys

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C.
 Storage temperature: -20C to +70C.
 Dimensions: 80mm x 65mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 0.5kg.
 Optional for Mechanical or Optical ball



Model Number: LBKWS35003 (Back mount)

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 440mm x 200mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Back mount
 No. of keys: 83 keys, high quality stainless steel
 Track ball diameter: 38mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 3.70kg.
 All languages version and interface are available on request.



Model Number: Mini Metal Keyboard LBMKB35701

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 230mm x 87mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 64 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.40kg.
 All languages version and interface are available on request.



Model Number: Mini Metal Keyboard LBMKB35702

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 244mm x 104mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 86 keys, high quality stainless steel
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.50kg.
 All languages version and interface are available on request.



Model Number: Mini Metal Keyboard with Trackball LBMKB35703

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 300mm x 104mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 86 keys, high quality stainless steel
 Track ball: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.60kg.
 All languages version and interface are available on request.



Model Number: Mini Metal Keyboard LBMKB35704

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 370mm x 104mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 106 keys, high quality stainless steel
 Track ball: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 2.20kg.
 All languages version and interface are available on request.



Model Number: Mini Metal Keyboard LBMKB35705

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 293mm x 87mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 66 keys, high quality stainless steel
 Track ball: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.40kg.
 All languages version and interface are available on request.



Model Number: Black Mini Metal Keyboard LBMKB35705-BL

Protection Level: IP65; NEMA4X
 Lifespan: > 5 years.
 Interface: PS2, USB available.
 Supply Voltage: +5V DC +/-5%
 Operating temperature: -10C to +60C
 Storage temperature: -20C to +70C.
 Panel dimensions: 293mm x 87mm
 Dustproof, Water proof, Vandalism resistance
 Mounting type: Rear Mounting
 No. of keys: 66 keys, high quality stainless steel
 Track ball: 25mm
 Key switch Technology: Silicone switching element
 Key switch lifetime: > 5 million of operations.
 Actuation Force/travel: 1N/2.0mm
 Mounting Rack: Aluminum alloy
 Lettering: laser engraved legends for excellent durability
 G.W.: 1.40kg.
 All languages version and interface are available on request.




Model Number: LBPK3587TB

87 keys, All layouts available
 Key Lifetime:>10 millions actuations
 Silkscreen key legend
 Working voltage:5VDC,working current:<=100mA
 Key Travel:2.2mm ± 0.5mm
 Key actuation force:50 ± 10g
 USB or PS2 interface
 OS: DOS/Windows95/98/NT/ME/2000/2003/XP/Vista,Win7,
 Linux, Unix, Mac OSX
 Cable Length:1.5m
 Operating temperature: 0~60 ° C
 Size:400x133x13mm
 Weight:0.75kg



Model Number: Silicone Keyboard LBSK35301

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 102 keys and 2 mouse buttons
- Dimensions: 445(L) x 180(W) x 20(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

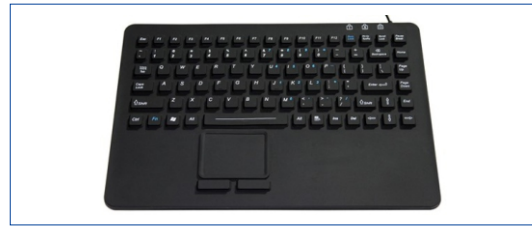

Model Number: Silicone Keyboard LBSK35302

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 99 keys
- Dimensions: 343(L) x 228(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE



Model Number: Silicone Keyboard LBSK35303

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 87 keys
- Dimensions: 230(L) x 150(W) x 10(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




Model Number: Medical Keyboard LBSK35305

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 105 keys
- Dimensions: 442(L) x 140(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE



Model Number: Medical Keyboard LBSK35307

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 98 keys
- Dimensions: 272(L) x 135(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

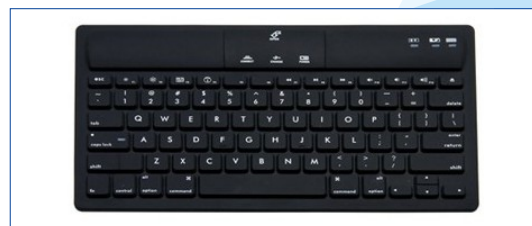

Model Number: Bluetooth Keyboard LBSK35307-WL

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: Bluetooth
- Key layout: 98 keys
- Dimensions: 272(L) x 135(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




Model Number: LBSK35308

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 116 keys
- Dimensions: 346(L) x 136(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE



Model Number: LBSK35309

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 87 keys
- Dimensions: 220(L) x 110(W) x 9(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

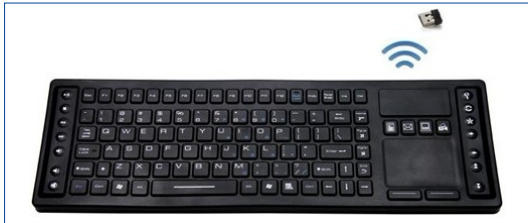


Model Number: Wireless Keyboard LBSK35310-WL

- A specially designed industrial keyboard, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: 2.4G
- Key layout: 105 keys
- Dimensions: 418(L) x 133(W) x 16(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




Model Number: Backlit Keyboard LBSK35311

- A specially designed backlit industrial keyboard, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Conveniently cleaning of flat membrane
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 110 keys
- Dimensions: 388(L) x 148(W) x 15(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

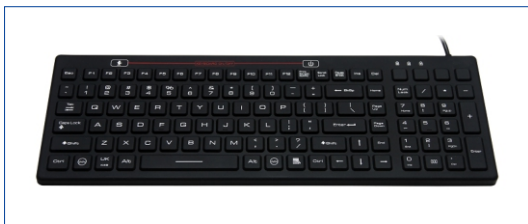

Model Number: Waterproof Keyboard LBSK35312

- A specially designed industrial keyboard, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 380(L) x 130(W) x 10(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

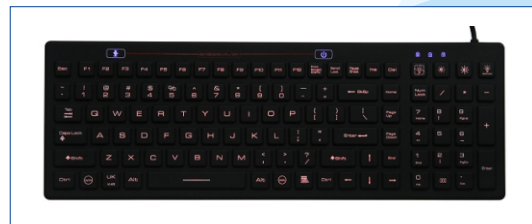


Model Number: Backlit Keyboard LBSK35312-B1

- A specially designed backlit industrial keyboard, washable, made of rigid silicone
- With keyboard power and backlit ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 380(L) x 130(W) x 10(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




Model Number:LBSK35313

- A specially designed industrial keyboard, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Conveniently cleaning of flat membrane
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 388(L) x 138(W) x 13(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

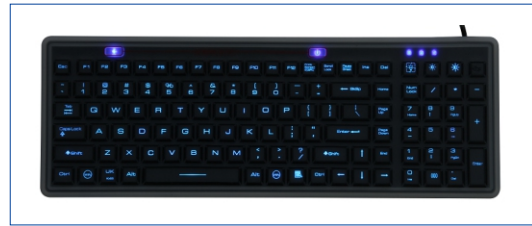

Model Number:LBSK35313-B1

- A specially designed backlit industrial keyboard, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Conveniently cleaning of flat membrane
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 388(L) x 138(W) x 13(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

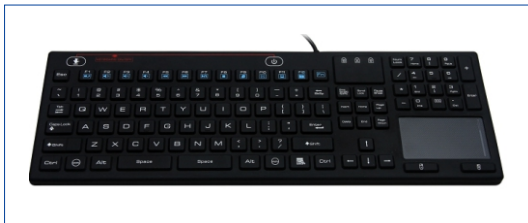


Model Number:Medical Keyboard with touchpad LBSK35314

- A specially designed industrial keyboard, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 118 keys
- Dimensions: 409(L) x 139(W) x 11(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




Model Number:Silicone Keyboard with touchpad LBSK35315

- A specially designed industrial keyboard, washable, made of rigid silicone
- With keyboard power ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 102 keys
- Dimensions: 298(L) x 213(W) x 11(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

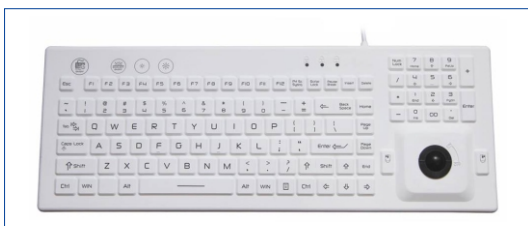

Model Number:Medical Keyboard with Trackball LBSK35319BL

- A specially designed backlit keyboard with trackball, rigid and rugged, waterproof and washable, made of silicone
- 4-step brightness of backlight
- With Keyboard main power and backlight ON/OFF switch
- trackball provides convenient mouse function
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft Windows7/8/10/Vista/XP/2000/ME/98
- Language: All the languages compatible with Windows
- Communication: USB1.1
- Key layout: 106 keys
- Dimensions: 390(L) x 140(W) x 15(T) mm
- Protection level: IP68

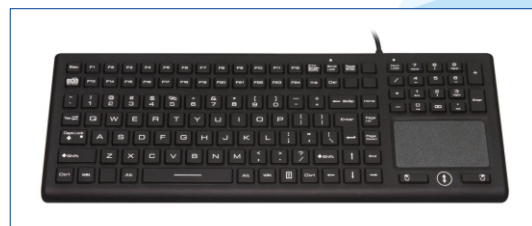

Model Number:Rugged Silicone Keyboard LBSK35321

- A industrial keyboard with touchpad, rigid and rugged, waterproof and washable, made of silicone
- 24 functional keys F1 ~ F24
- Keyboard main power ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatible with Microsoft® Windows® 10, 8, 7, Vista® & XP
- Language: All the languages compatible with Windows®
- Interface: USB 1.1
- Dimensions: 368(L) x 135(W) x 13(T) mm
- Touchpad working area: 70(W) x 40(H) mm
- Net weight: 710 g
- Protection level: IP68
- Approvals: CE, FCC & RoHS




Model Number: LBSM35501 Waterproof optical Mouse

- A stylish design and comfortable shape, rugged and waterproof, made of silicone
- Precise and smooth cursor movement, superior performance
- Rubberized surface provides comfort to user
- 800 dpi optical sensor with 3000 frames/second scan rate
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Communication: USB
- Button layout: Left &right buttons and scroll wheel performed by 3 buttons
- Dimension: 130x80x48mm
- Net weight:180g
- Colors: Solid, translucent and any custom colors
- Approvals: CE ROHS FCC




Model Number: LBSM35502 Silicone Laser Mouse

- A stylish design and comfortable shape, rugged and waterproof, made of silicone
- Precise and smooth cursor movement, superior performance
- Rubberized surface provides comfort to user
- 1200 dpi laser sensor with 3000 frames/second scan rate
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Communication: USB
- Button layout: Left &right buttons and scroll wheel performed by 3 buttons
- Dimension:115x68x42mm
- Net weight:155g
- Colors: Solid, translucent and any custom colors
- Approvals: CE ROHS FCC

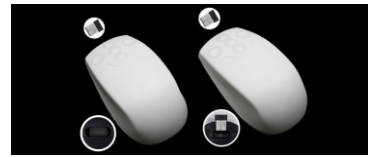

Model Number: LBSM35502-WL Wireless laser Mouse

- A wireless laser mouse, rugged and waterproof, made of silicone
- 2.4GHz digital radio frequency technology
- Automatic synchronization between keyboard and receiver
- Working distance up to 10 meters
- rubberized surface provides comfort to user
- Precise and smooth cursor movement, superior performance
- 1200 dpi laser sensor with 3000 frames/second scan rate
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Communication: Mini USB receiver
- Button layout: Left &right buttons, scroll wheel performed by 3 buttons
- Dimension:114x65x41mm
- Net weight:95g

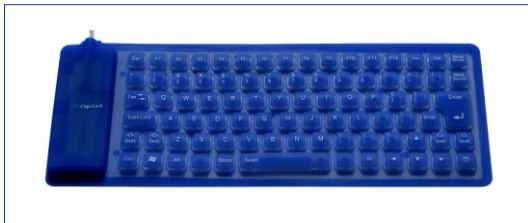

Flexible Waterproof Silicone Keyboard LBFSK3585

- A mini size flexible keyboard, waterproof, washable, roll-up, made of silicone
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Language: All the languages compatible with Windows
- Communication: USB1.1, PS/2 & USB+PS/2
- Key layout: 85 keys
- Dimensions: 350(L) x 138(W) x 12(T) mm



Full Size Flexible Keyboard LBFSK35108

- A full size flexible keyboard, waterproof, washable, roll-up, made of silicone
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Language: All the languages compatible with Windows
- Communication: USB1.1, PS/2 & USB+PS/2
- Key layout: 108 keys
- Dimensions: 495(L) x 138 (W) x 12(T) mm



Wireless Health Glass keyboard LBWGKB3501

- weight:0.87kg
- Dimension:436x160x20mm
- Interface:USB Bluetooth&RF via Dongle
- Material:Tempered Glass+Rugged ABS case
- Color:Medical white
- Key size:18x18mm
- Touchpad Size:119x102mm
- Box Dimension:470x196x48mm
- Carton:50x40x30cm 10pcs/carton
- Carton GW:17.5KGS



Bluetooth Glass keyboard LBWGKB3502

- Material:Tempered Glass +Aluminium Alloy
- Keyboard,Mouse and touchpad are three major functions
- Surface waterproof, Easy to clean
- Material:Tempered Glass+Rugged ABS case
- Color:Silver with Gray
- Two modes:Bluetooth and USB
- Wireless type:Bluetooth 3.0
- Battery Capacity:1040mAh
- Power consumption:25mA
- Support system:
 - Windows, Mac OSX,
 - Android (Only support keyboard and mouse, do not support gesture)
 - iOS(only support keyboard , do not support gesture and mouse)



www.logicbus.com.mx / www.logicbus.com

MX +52 (33)-3823-4349 ventas@logicbus.com

USA +1 (619)-616-7350 sales@logicbus.com